
ר בר	п		<b>O</b>	₿   >			
	ØS						
			LAYOUT SHOWN AS EXAMP	LE			
	Keying Shown as example						
CHARACTERISTICS		_					
-Standard : Based on MIL-DTL-38999 Series III	Connector dimension Dim Nominal						
- Shell Material : Composite	ØS 29.4 Max	]	SOLIDIAL chall not be lights for any non	conformity or damage			
-Shell Plating : Nickel	Z'         31.5 Max           VV THREAD         M18x1-6g	-	SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with				
-Insulator : Thermoplastic		-	the Specifications issued by either of the Parties or by a third party				
-Contacts : Copper Alloy			(professional recommendation, te	echnical notice.)			
-Seals & Grommet : Silicon Elastomer			Country	Jurisdiction & Control List			
-Contact Plating : Gold over copper Alloy 0.8μm minimum		Г	FR	Not Listed			
-Durability : 500 Mating cycles			PN: 8D513M04BA				
-Delivered with Souriau contacts and Accessories							
-Temperature Range -65°C to +200°C		A 18-10-20	16 First Release				
-Salt Spray : 2000 hours		ISS DATE	Latest modification - by		MOD N°		
Mass : 20.9 g ± 10%		Designed By:	Date:	CUSTOMER DRAWING			
		TITLE	TITLE Composite Plug 8D series				
		SCALE	General linear	NPRDS / PROJECT			
BASIC SERIES: 8D 5 - 13 M	Л 04 B A		-[ (	859			
SHELL TYPE : Plug with RFI Shielding		NA		This document is the pro	operty of		
CONTACT TYPE : Standard Crimp Contact ORIENTATION :			SOURIAU         WWW.SOURIAU.COM         SOURIAU it must not be reproduced or				
SHELL SIZE : 13	CONTACT TYPE : SOCKET			communicated without p			
		VOUT · 13-04 FORMAT			SHEET		
PLATING : M = Nickel	CONTACT L/	AYOUT : 13-04 A3	SOURIAU DR	GN	SHEET		

-	Ŧ	G	г <b>т</b>	m	D	0
		Contact Layout				
4	،	$ \begin{array}{c}                                     $				
	Conta position A B C D Shell Arrangement N size no. d 13 -4	+.000 (0.00)         +.150 (0.81)           +.146 (3.71)         +.035 (0.89)           +.000 (0.00)        083 (2.11)          146 (3.71)         +.035 (0.89)				
ω						
	F					
						SOURIAU shall not be liable for an due to a use of the Products w the Specifications issued by either o (professional recommenda
N						Count FR
						PN: 8D513N
					A 18-10-20 ISS DATE	16 First Release Latest modification - by
					Designed By:	Date:
					TITLE	Compo
_					SCALE NA	General linear Tolerances:
					SOURIA	U WWW.SOURIAU.C
					FORMAT A3	SOURIAU
L	Н	G	F	E	D	8D513M

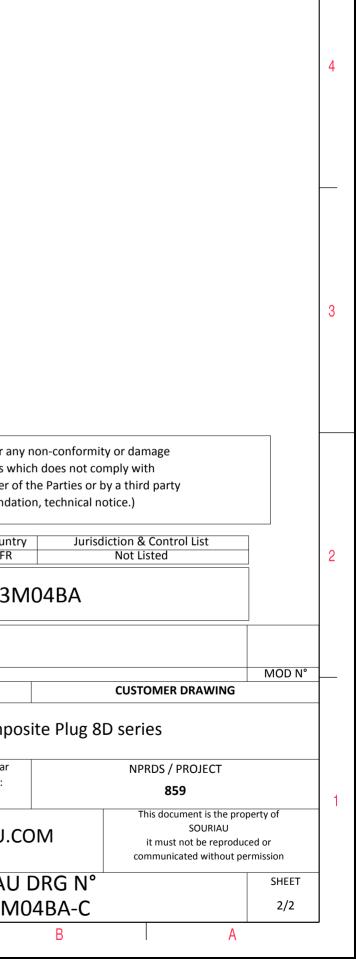

ω