
	ت <u>م</u> ا ا	m		0		Þ	
CHARCTENSTCI Sublication is secondly Sublication is secondly Sublication is secondly Sublication is completed by Sublication is secondly Sublication is secondly Sublication is secondly Sublication is secondly Sublication is secondly in the sublication is secondly with the Specification is secondly with the Specif Machine Intervice Intervice Intervice Intervice Intervice Interv	4						4
CHARCTERSTICE Suddrd: Based on MIL-DTL-38999 Series III Contact Plating III Series IIII Series IIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIII		The second secon		LAYOUT SHOWN AS	EXAMPLE		3
CHARCTERSTICE Suddrd: Based on MIL-DTL-38999 Series III Contact Plating III Series IIII Series IIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIII	Keving St	nown as example					
Standard : Based on MIL-DT-38999 Series III Shell Matchiai :: Aluminium :: Aluminium : Aluminium : Shell TPE <td:: aluminium<="" td=""> : Aluminium : Aluminium : Shell TPE <td: blackeine<="" td=""></td:></td::>							
Shell Material # Aluminium Shell Material # Aluminium Shell Material # Nickel Shell Material # Nickel Shell Material # Nickel Contacts : Copper Alley Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alley 0.8 µm minimum -Ourability : Sol Material -Durability : Sol Material -Durability : Sol Material -Mass : 29.9 g ± 10% -Mass : 29.9 g ± 10% -Mass : Sol Material -Mass : Sol Material SHELL TYPE : Nickel -Mass : Sol Material -Mass <td: material<="" sol="" td=""> -Mass <td: material<="" sol="" td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td></td:></td:>							
- Durability :: 500 Mating cycles - Delivered with Souriau contacts and Accessories - Temperature Range :: -65°C to +200°C - Salt Spray :: 48 hours - Mass :: 29.9 g ± 10% BASIC SERIES: 8D 5 17 F 06 A A SHELL TYPE :: Plug with RFI Shielding CONTACT TYPE :: Standard Crimp Contact SHELL SIZE : 17 PLATING :: F = Nickel CONTACT TYPE :: Plug with RFI Shielding PLATING :: F = Nickel - CONTACT TYPE :: Plug with RFI Shielding PLATING :: F = Nickel - CONTACT TYPE :: Plug with RFI Shielding PLATING :: F = Nickel - CONTACT TYPE :: Plug with RFI Shielding PLATING :: F = Nickel - CONTACT TYPE :: Plug with RFI Shielding PLATING :: F = Nickel - CONTACT TYPE :: Plug with RFI Shielding - CONTACT TYPE	-Shell Plating: Nickel-Insulator: Thermoplastic-Contacts: Copper Alloy-Seals & Grommet: Silicon Elastomer	Z 31 Max		due to a use of the Products w the Specifications issued by either (professional recommenda	which does not comply with of the Parties or by a third p ation, technical notice.)	ontrol List	
-Salt Spray : 48 hours -Mass : 29.9 g ± 10% BASIC SERIES: 8D 5 - 17 F 06 A A SHELL TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 17 PLATING : F = Nickel CONTACT TYPE : Plug with RFI Shieldings CONTACT TYPE : Nickel CONTACT TYPE : Plug with RFI Shieldings CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 17 PLATING : F = Nickel CONTACT TYPE : Nickel CONTACT TY	-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories					ed	2
-Mass : 29.9 g ± 10% BASIC SERIES: 8D 5 - 17 F 06 A A SHELL TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 17 PLATING : F = Nickel CONTACT TYPE : PIN(500 Matings) CONTACT TYPE : DIN(500 Matings)			A 14-10-2016 Fi	rst Release			
BASIC SERIES: 8D 5 17 F 06 A A ITTLE Aluminium Plug 8D series BASIC SERIES: 8D 5 17 F 06 A A Ittle Scale General linear NPRDS / PROJECT Series 859 Stell TYPE : Plug with RFI Shielding 1 Ittle NRDS / PROJECT Scale NRDS / PROJECT Scale NRDS / PROJECT SOURIAU SOURIAU NR							10
BASIC SERIES: 8D 5 17 F 06 A A SHELL TYPE : Plug with RFI Shielding - 17 F 06 A A A SCALE NA Scale 859 559 500 RIAU This document is the property of SOURIAU SOURIAU it must not be reproduced or communicated without permission SHELL SIZE : 17 CONTACT TYPE : PIN(500 Matings) CONTACT LAYOUT : 17-06 SOURIAU SOURIAU DRG N° source SHEET PLATING : F = Nickel - - - - - - 1/2					CUSTON		<u> </u>
BASIC SERIES. BOD 3 17 F 00 A A A A A A A B			TITLE	Aluminium Plug 8D series			
CONTACT TYPE : Standard Crimp Contact ORIENTATION : A SOURIAU SOURIAU.COM SOURIAU SHELL SIZE : 17 CONTACT TYPE : PIN(500 Matings) CONTACT LAYOUT : 17-06 FORMAT SOURIAU DRG N° SHEET PLATING : F = Nickel CONTACT LAYOUT : 17-06 FORMAT SOURIAU DRG N° SHEET 1/2 Image: Souriau Souriau Souriau Souriau Souriau		A				859	1
PLATING : F = Nickel FORMAT SOURIAU DRG N° SHEET A3 8D517F06AA-C 1/2			SOURIAU	WWW.SOURIAU.	COM	SOURIAU must not be reproduced or	
A3 8D517F06AA-C 1/2			FORMAT	COLIDIAL			
		CONTACT LAYOUT : 17-06					

			G	гт	т		D	0	
		Contac	ct Layout						
4		-x (D + F	+ Y A ⊕ ⊕ B + Y + × + ×						
		Contact Contact	€Y ntacts ngement 17-6) Location						
ယ	Shell Arra size 17	A + 121 B + 241 C + .000 D241 E121 F + .000 no. contacts co	m) (mm) (3.07) + 209 (5.31) (6.12) + 000 (0.00) (0.00) - 241 (6.12) (6.12) + 000 (0.00) (3.07) + 209 (5.31) (0.00) + 000 (0.00) Size Service Contact Superint ntacts rating location	sedes 053-6					
								SOURIAU shall not be li due to a use of the P the Specifications issued	roducts w
S								(professional rec	
							ISS DAT		D517
							Designed By: TITLE SCALE	Gen	Alumir eral linear erances:
							SOURIA		±
		I					FORMAT A3	80	JRIAU 0517F
	Н		G	F	E	\mathbf{V}	D	C	

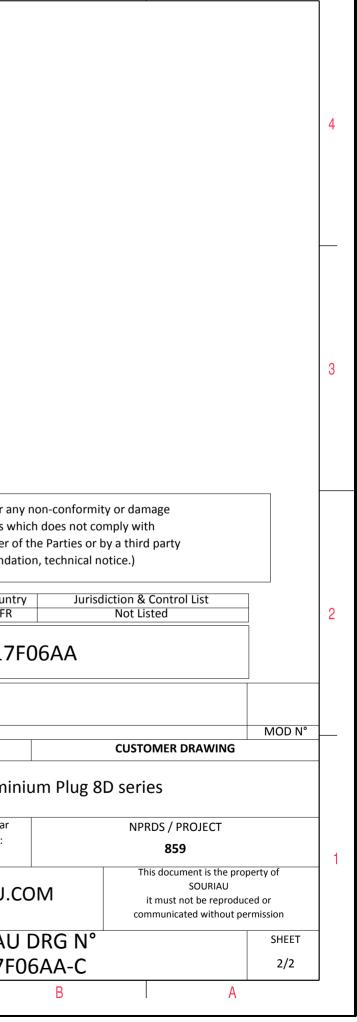

 \triangleright

σ