
ت ب ب	<b>IT</b>	m	D	0	<b>D</b>	>		
	ØS							
				LAYOUT SH	IOWN AS EXAMPLE			
	Koving Shown of ove							
	Keying Shown as exa	inpie						
CHARACTERISTICS		Connector dimension Dim Nominal						
-Standard : Based on MIL-DTL-38999 Series III -Shell Material : Composite		ØS 41.7 Max						ŀ
-Shell Plating : Nickel		Z' 31.5 Max			able for any non-conformity roducts which does not com			
-Insulator : Thermoplastic	VV	THREAD M31x1-6g			by either of the Parties or by			
-Contacts : Copper Alloy				(professional rec	ommendation, technical not	tice.)		
-Seals & Grommet : Silicon Elastomer					Country Jurisdic	tion & Control List	]	
-Contact Plating : Gold over copper Alloy 0.8μm minimum						Not Listed		
-Durability : 500 Mating cycles				<b></b>				
-Delivered with Souriau contacts and Accessories			PN: 8D521M35BN					
-Temperature Range65°C to +200°C								
-Salt Spray : 2000 hours			A 07-10-2	2016 First Release				ľ
Mass : 56.1 g ± 10%			ISS DAT	1	1		MOD N°	
			Designed By:	Date:		CUSTOMER DRAWING		
			TITLE		Composite Plug 8D	series		
BASIC SERIES: 8D 5 - 21 M	/ 35 B N		SCALE		eral linear erances:	NPRDS / PROJECT		
SHELL TYPE : Plug with RFI Shielding			NA		±	859		
CONTACT TYPE : Standard Crimp Contact		ORIENTATION : N	COUDIA			This document is the pro SOURIAU	perty of	
SHELL SIZE : 21		CONTACT TYPE : SOCKET(500 Matings)	SOURIA	WWW.SOU		it must not be reprodu communicated without p		
			FORMAT				SHEET	
PLATING : M = Nickel		CONTACT LAYOUT : 21-35	A3		JRIAU DRG N° 521M35BN-C		1/2	
					E)1KA)EDKI //		1//	

	т	۵	т	п		0	
4		Contact Layout $ \begin{array}{c}  & & & & \\  & & & & \\  & & & & \\  & & & &$					
	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	Y-axis (mm)         Contact position ID         X-axis (mm)         Y-axis (mm)           +426 (10.82)         41         -098 (2.49)         -322 (8.18)           +404 (10.26)         42         -184 (4.67)         -280 (7.11)           +362 (9.19)         43         -258 (6.55)         -220 (5.59)           >302 (7.67)         44         -311 (7.00)         -141 (4.68)           +227 (5.77)         45         -332 (8.43)         -048 (1.22)           +147 (0.358)         46         -332 (8.43)         -048 (1.22)           +048 (1.22)         47         -311 (7.30)         +141 (3.58)           -048 (1.22)         48         -258 (6.55)         +220 (5.59)           -141 (3.58)         49         -184 (4.67)         +280 (7.11)           -227 (5.77)         50         -088 (4.29)         +322 (8.18)					
ω	13         +.146 (3.71)           14         +.053 (1.35)           15        053 (1.35)           16        146 (3.71)           17        232 (5.89)	-302 (7 67)         51         -048 (1 22)         +241 (6 12)           -362 (9.19)         52         +048 (1 22)         +241 (6 12)           -404 (10 26)         53         +134 (3 40)         +199 (5 05)           -426 (10 82)         54         +208 (5 28)         +139 (3 53)           -426 (10 82)         55         +237 (6 02)         +048 (1 22)           -426 (10 25)         56         +237 (6 02)         +048 (1 22)           -362 (9.19)         57         +208 (5 28)         -139 (3 53)            Contacts         (Insert arrangement 21-35)         -					
2	23406 (10.31) 24265 (9.27) 25306 (7.77) 26232 (5.89) 27146 (3.71) 28053 (1.35) 29 + .000 (.00) 30 + .088 (2.49) 31 + .184 (4.67) 32 + .258 (6.55) 33 + .311 (7.90) 34 + .332 (8.43) 35 + .332 (8.43) 36 + .311 (7.90) 37 + .258 (6.55) 38 + .184 (4.67) 39 + .088 (2.49) 40 + .000 (.00) 5hell Arrangement Num	V-axis (mm)         Contact position ID         X-axis (mm)         Y-axis (mm)           302 (7.67)         58         +134 (3.40)         -199 (5.05)           -227 (5.77)         59         +048 (1.22)         -241 (6.12)           -141 (3.59)         60         -048 (1.22)         -241 (6.12)           -448 (1.22)         61        134 (3.40)         -199 (5.05)           -448 (1.22)         62         -208 (5.28)         -139 (3.53)           +048 (1.22)         62         -208 (5.28)         -139 (3.53)           +362 (9.19)         66         -134 (3.40)         +199 (5.05)           +332 (7.67)         65         -208 (5.28)         +139 (3.53)           +362 (9.19)         66         -134 (3.40)         +199 (5.05)           +404 (10.26)         67         -048 (1.22)         +146 (3.71)           +323 (8.10)         69         +125 (3.18)         +000 (0.00)           +323 (8.10)         69         +125 (3.18)         +000 (0.00)           +220 (5.59)         72         +048 (1.22)         +146 (3.71)           +232 (8.18)         70         -145 (3.18)         +000 (0.00)           +141 (3.58)         76         -125 (3.18)         +000 (0.00)	1			SOURIAU shall not be liable due to a use of the Proc the Specifications issued by e (professional recom	ducts w either c
	size no. cont 21 -35 7	tacts contacts rating location 79 22D M ALL MS27531-35			A 07-10-20 ISS DATE Designed By:	PN: 8D5 16 First Release Latest modification - by Date:	5211
-					TITLE SCALE NA	General Toleral ±-	nces: -
	H	G	F	E	FORMAT A3	J WWW.SOURI SOUF 8D52	RIAU
	П	U U	I I <sup>r</sup> I			i <b>V</b> I	

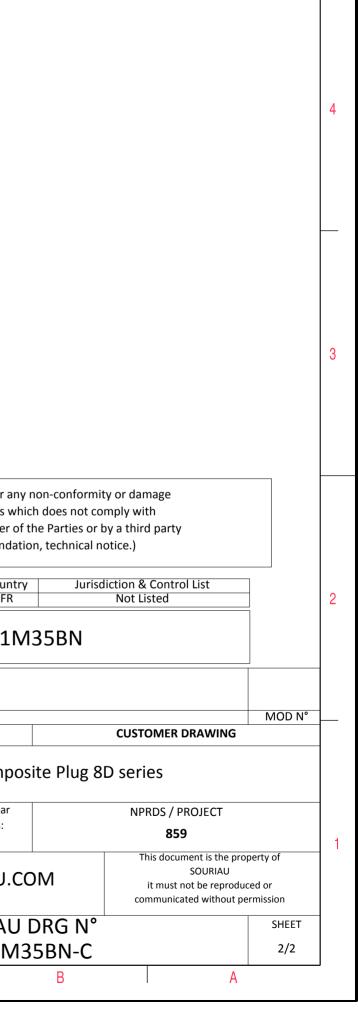

 $\triangleright$ 

σ