
-XX IN THE ENDING OF THE CABLE PART NUMBER IS CALLING OUT THE LENGTH OF THE ASSEMBLY FROM CENTER TO MATING FLANGE OF CONNECTORS. EXAMPLES SHOWN BELOW:

LTI P/N: CB1.17LL-IPX-MCLFGT-4IN (4 INCHES) CB1.17LL-IPX-MCLFGT-10IN (10 INCHÉS)

REVISIONS									
REV	ECR	DESCRIPTION	DRAWN	DATE					
1		PRODUCTION RELEASE	M. LARSEN	08/08/2022					



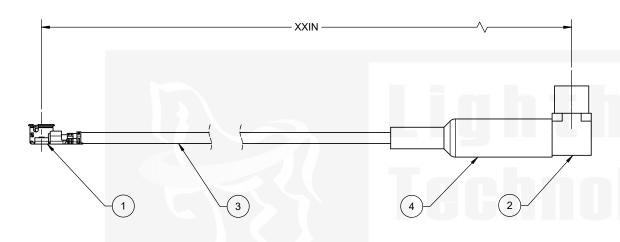

ITEM	PART NUMBER	DESCRIPITION	QTY	
1	IPXLF11GPB-113	IPX (MHF1), RHT ANGLE, JACK, CABLE CRIMP (I-PEX 20278-112R-13)	1	
2	MCLF11GT-178	MMCX, RIGHT ANGLE, JACK, CABLE CRIMP		
3	1.17LL MICRO COAX	CABLE, 1.17LL LOW LOSS MICRO COAX, GRAY	AR	
4	1635F-1/8"	.125 (1/8) DIA, .75 LENGTH, GREEN	1	

IPX® AND MHF® ARE REGISTERED TRADEMARKS OF I-PEX CO., LTD. CORPORATION

DO NOT SCALE DRAWING					Lighthorse Technologies	
TOLERANCES UNLESS OTHERV			/ISE SPECIFIED	4	San Diego, CA	
	DIMENSIO MILLIMETE	NS ARE IN			WWW.RFCONNECTOR.COM	
X = ±0.5		5	⊕ √-	TITLE	CABLE ASSEMBLY, IPX (MHF1), R/A	
	X.X = ±0.2 X.XX = ±0. ANGLE = +3	13	THIRD ANGLE PROJECTION		CRIMP TO MMCX, R/A JACK, CRIMI	
CUSTOMER APPROVAL				USING 1.17LL (LOW LOSS) MICRO COAX		
	SIGN / DATE:			SIZE	PART/DWG. NO:	
	ENG APPR.	P. BURDGE	08/08/2022		004 451 1 107/1401 505 111	
	CHECKED	M. HELD	08/08/2022	l B	CB1.17LL-IPX-MCLFGT-xxIN	

SEMBLY, IPX (MHF1), R/A JACK, MMCX, R/A JACK, CRIMP, OW LOSS) MICRO COAX, GRAY

Α

SHEET 1 OF 1

08/08/2022 B CB1.17LL-IPX-MCLFGT-xxIN M. HELD DRAWN M. LARSEN 08/08/2022 SCALE: 4:1 FILE NAME NAME DATE

PROPRIETARY AND CONFIDENTIAL

UNLESS OTHERWISE SPECIFIED: THIS DOCUMENT CONTAINS LIGHTHORSE TECHNOLOGIES INFORMATION, REPRODUCTION, USE, DISCLOSURE OR TRANSMITTAL OF ALL OR ANY PART OF THIS DOCUMENT IS PROHIBITED EXCEPT TO THE EXTENT APPROVED IN WRITING BY AN AUTHORIZED REPRESENTATIVE OF LIGHTHORSE TECHNOLOGIES LIGHTHORSE TECHNOLOGIES RESERVES ALL RIGHTS UNDER PATENTS, TRADEMARKS, COPY RIGHTS OF LIGHTHORSE TECHNOLOGIES SECRETS. COPY RIGHTS OF LIGHTHORSE TECHNOLOGIES 2011, ALL RIGHTS NUMBER DESCRETS. COPY RIGHTS OF LIGHTHORSE TECHNOLOGIES 2011, ALL RIGHTS NESERVED.

Pb