


-XX IN THE ENDING OF THE CABLE PART NUMBER IS CALLING OUT THE LENGTH OF THE ASSEMBLY FROM CENTER TO MATING FLANGE OF CONNECTORS. EXAMPLES SHOWN BELOW:

LTI P/N: CB1.17LL-IPX4L-MCMGT-4IN (4 INCHES)  
 CB1.17LL-IPX4L-MCMGT-10IN (10 INCHES)

REVISIONS				
REV	ECR	DESCRIPTION	DRAWN	DATE
1		PRODUCTION RELEASE	M. LARSEN	08/08/2022

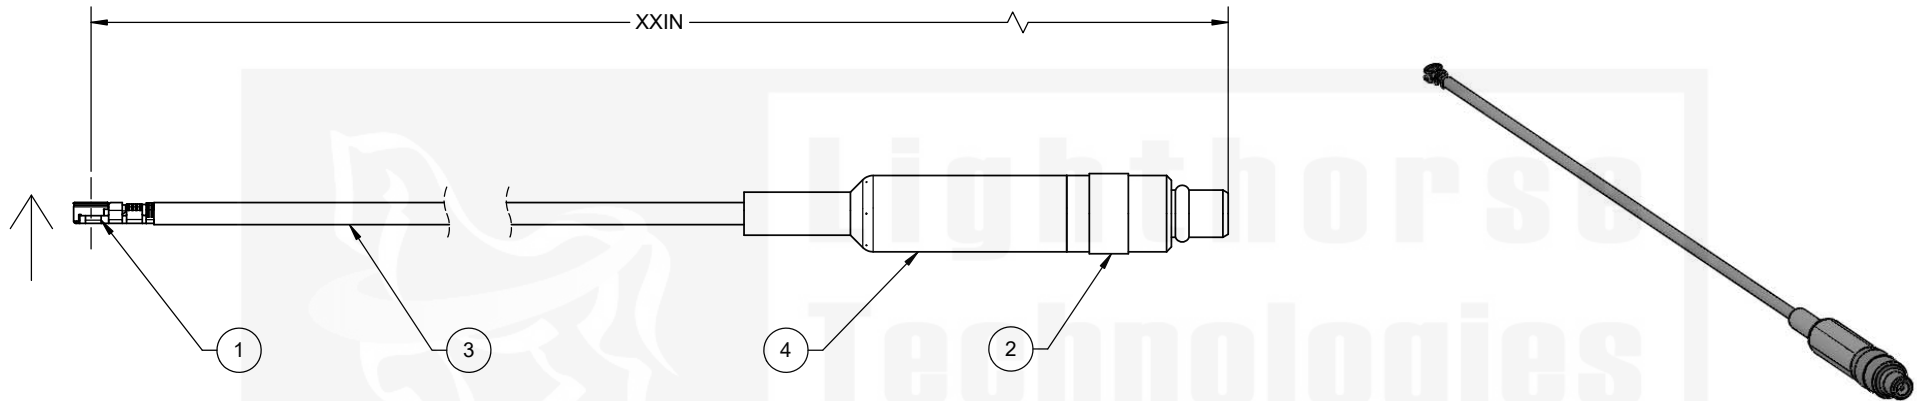

**SCALE: NONE**

ITEM	PART NUMBER	DESCRIPTION	QTY
1	IPX4LLF11GPB-113	IPX4L (MHF4L), RHT ANGLE, JACK, CABLE CRIMP (I-PEX 20565-001R-13)	1
2	MCSM11GT-178	MMCX, STRAIGHT, PLUG CABLE CRIMP	1
3	1.17LL MICRO COAX	CABLE, 1.17LL LOW LOSS MICRO COAX, GRAY	AR
4	1635F-1/8"	.125 (1/8) DIA, .75 LENGTH, GREEN	1

IPX® AND MHF® ARE REGISTERED TRADEMARKS OF I-PEX CO., LTD. CORPORATION

DO NOT SCALE DRAWING		<p><b>Lighthouse Technologies</b>                  San Diego, CA                  WWW.RFCONNECTOR.COM</p>
TOLERANCES UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS X = ±0.5 XX = ±0.25 XXX = ±0.13 ANGLE = ±30°		
THIRD ANGLE PROJECTION 		TITLE: CABLE ASSEMBLY, IPX4L (MHF4L), R/A JACK, CRIMP TO MMCX, PLUG, CRIMP, USING 1.17LL (LOW LOSS) MICRO COAX, GRAY
CUSTOMER APPROVAL		SIZE: B PART/DWG. NO.: CB1.17LL-IPX4L-MCMGT-xxIN REV: A
SIGN / DATE:		SCALE: 4:1 FILE NAME: SHEET 1 OF 1
ENG APPR.:	P. BURDGE 08/08/2022	
CHECKED:	M. HELD 08/08/2022	
DRAWN:	M. LARSEN 08/08/2022	
NAME:	DATE:	

**PROPRIETARY AND CONFIDENTIAL**

UNLESS OTHERWISE SPECIFIED: THIS DOCUMENT CONTAINS LIGHTHORSE TECHNOLOGIES INFORMATION. REPRODUCTION, USE, DISCLOSURE OR TRANSMITTAL OF ALL OR ANY PART OF THIS DOCUMENT IS PROHIBITED EXCEPT TO THE EXTENT APPROVED IN WRITING BY AN AUTHORIZED REPRESENTATIVE OF LIGHTHORSE TECHNOLOGIES. LIGHTHORSE TECHNOLOGIES RESERVES ALL RIGHTS UNDER PATENTS, TRADEMARKS, COPYRIGHTS AND TRADE SECRETS. COPY RIGHTS OF LIGHTHORSE TECHNOLOGIES 2011, ALL RIGHTS RESERVED.

