

Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.



Ratings

Use Group B
 Rated Voltage 125V
 Rated Current 6A
 Rated Wire Size
 solid AWG 28-16
 flexible AWG 28-16


Screw Size M2

Insulating Material

Material PA 6.6
 Flammability Class UL 94 V-0

Materials

Clamp Brass
 Screw Stainless Steel
 Solder Tag Steel
 Temperature Range -40° C ~ 105° C
 RoHS Compliant

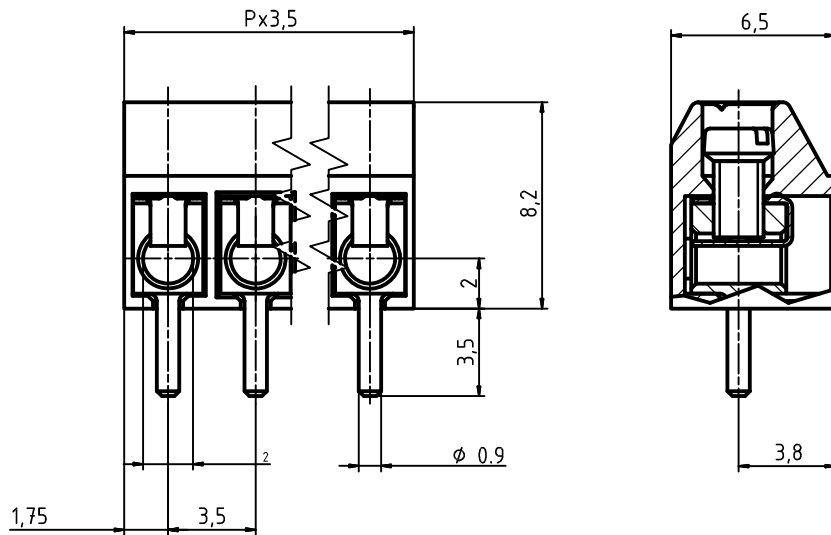

Part No.: **ED555/XDS**

No. of Poles
 02 2 Poles
 03 3 Poles

 16 16 Poles

⚠			
SIGN	DESCRIPTION	CHK.	DATE

DWG	WF. Zhang	DATE	2017.09.11	UNITS:	MM	SHEET:	1 OF 1	Tolerance
CHK.	WF. Zhang	DATE	2017.09.11	SCALE:	NONE 5:1 (:)	REV:	A	X. ±0.50
APP.		DATE		TITLE:	ED555DS series 3.5 mm, one piece wire protector, horizontal wire entry			X.X ±0.30
				PART NO.	ED555/XDS			X.XX ±0.10
				DWG NO.	ED555/XDS.DWG			X° ±1°



ON-SHORE TECHNOLOGY, INC.