


Customer Information

IF IN DOUBT - ASK NOT TO SCALE DRAWING No.: G125-MCXXX05LX-XXXXF THIRD ANGLE PROJECTION ALL DIMENSIONS IN mm



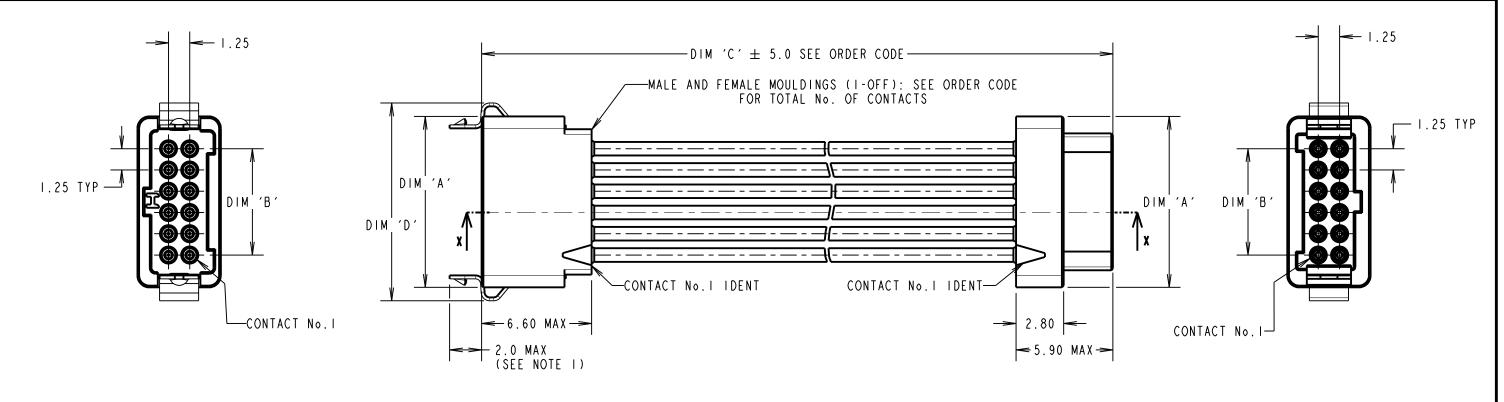

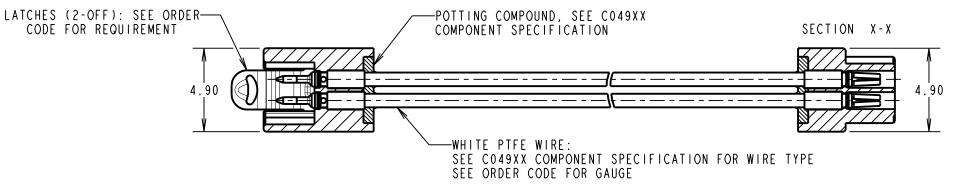



PATENTED	TECHNOLOGY

DIM 'A'	
	x 0.625 + 3.80
DIM 'B'	(TOTAL No. OF CONTACTS - 2)
	x 0.625±0.20
DIM 'D'	(TOTAL No. OF CONTACTS – 2)
	x 0.625 + 5.2

- I. LATCHES ARE SHOWN FOR ILLUSTRATION ONLY. WHEN "LO" IS SPECIFIED IN THE ORDER CODE NO LATCHES WILL BE FITTED.
- 2. WIRING OF CABLES:
- CONTACT | TO CONTACT |, CONTACT 2 TO CONTACT 2, ETC.
- CABLE ASSEMBLIES WILL BE BULK PACKED IN BAGS.
- FOR COMPLETE SPECIFICATION SEE COMPONENT SPECIFICATIONS C049XX AND C125XX (LATEST ISSUES).
- 5. CUSTOM LENGTH CABLE ASSEMBLIES CAN BE PRODUCED FROM 60mm TO 9999mm.



THIS DRAWING AND ANY
INFORMATION OR DESCRIPTIVE
MATTER SET OUT HEREON ARE
CONFIDENTIAL AND COPYRIGHT
PROPERTY OF THE HARWIN
GROUP AND MUST NOT BE
DISCLOSED, LOANED, COPIED
OR USED FOR MANUFACTURING,
TENDERING OR FOR ANY
OTHER PURPOSE WITHOUT
THEIR WRITTEN PERMISSION.

UNLESS STATED

26 AWG = I-

28 AWG = 2

30 AWG = 3

TOLERANCES X. = ±1mm X.X = ±0.50mn $X.XX = \pm 0.20$ mm $X.XXX = \pm 0.01$ mm FINISH: ANGLES = ±5°

G125-MCXXX05LX-XXXXF

MATERIAL: SEE ABOVE

S/AREA:

SEE ABOVE

DIM 'C' LENGTH:

0060 = 60 mm MIN

LO = NO LATCHES

L4 = LATCHES (MALE ONLY)

LATCHES:

9999 = 9999mm MAX

G125 SERIES MALE CRIMP TO FEMALE CRIMP CABLE ASSY

APPROVED:

CUSTOMER REF.:

ASSEMBLY DRG:

CHECKED:

DRAWN:

03.02.21 30101 DATE

R.ALEXANDER

R.PORTLOCK

S.FLOWER

CN/CO

DRAWING NUMBER:

G125-MCXXX05LX-XXXXF

