## **SRWF16U38**

## SmartRack® Low-Profile Wall-Mount Rack Enclosure Cabinet





Load Rating



Construction

Α



**Top Cover** 



**Accommodates** Standard 19-inch Equipment

C



**4U of Horizontal Rack Space for Patch Panels** 



Convenient **Cable Access** 



Ample Airflow




- Front Panel (Removable)
- Side Panels (2) (Removable)
- (Removable) **■** Horizontal Rack Space for

Cable Access Port Covers (4)

- Patch Panels (4U)
- Vertical Rack Space for Equipment Up to 35 in. (12U)
- **G** Keys (2)





· Wall-mount enclosures provide convenient, locking storage for rackmount IT devices and other equipment that should be off the floor, out of the way and secure


C

- · Low-profile design with vertical equipment mounting is ideal for back office or network closet applications where space is limited
- 4U of horizontal space at the top of the unit accommodates patch panels up to 2.5 inches deep

## SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS



1111 W. 35th Street Chicago, IL 60609 USA 773.869.1234 www.tripplite.com












specifications co	MPLIANT
Model	SRWF16U38
Rack Spaces	16U
Equipment Mounting Depth	Up to 35 in. (889 mm)
Load Rating*	400 lb. (181 kg)
Unit Dimensions (H x W x D)	38 x 19.69 x 23.19 in. / 965.2 x 500 x 589 mm
Shipping Dimensions (H x W x	D) 42.91 x 22.44 x 26 in. / 1090 x 570 x 660 mm
Unit Weight	81.5 lb. / 37 kg
Shipping Weight	102.7 lb. / 46.58 kg
Standards	EIA-310-E, NOM, GOST, RoHS, PCI-DSS

The load rating includes the combined weight of the unit and installed equipment. The unit must be mounted to a stable surface with user-supplied anchors capable of bearing the full load.

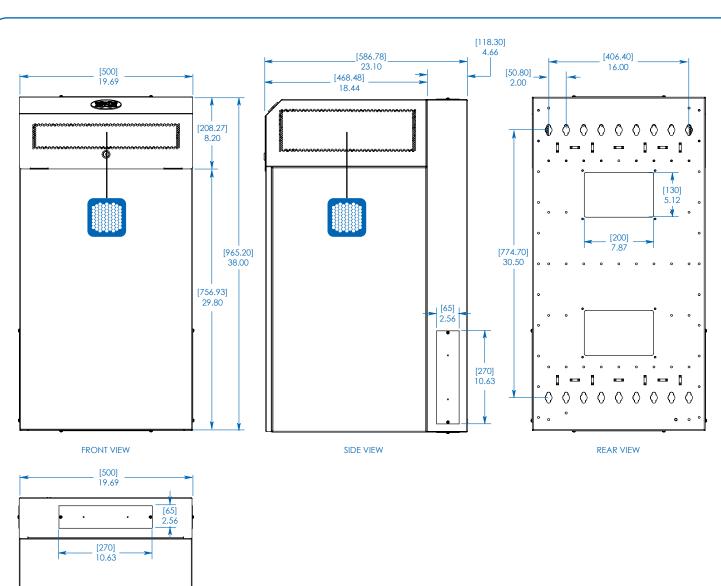







## Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.





1111 W. 35th Street Chicago, IL 60609 USA 773.869.1234 www.tripplite.com