

## SUMMARY

### # Wires



Image is for illustrative purpose only

Series	1B
Termination type	
IP rating	50
AWG wire size	0.00 - 0.00
Cable Ø	3.10 - 4.20 mm
Status	active

### Download

- [Request a quote](#)
- [Catalog](#)

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	FG*: B series cable collet
Keying	No keying
Housing Material	Brass (gold plated [ISO 27874]) shell, collet nut, brass latch sleeve and mid pieces
Weight	2.09 g

### Performance

- Configuration
- Insulator
- Rated Current


### Others

- Endurance (Shell): 5000
- Temp (min / max): -55° C / +250° C
- Humidity (max): <=95% [at 60 deg C / 140 F]
- Vibration: 15 g [10 Hz - 2000 Hz]
- Shock Resistance: 100 g [ 6 ms]

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Climatical Category: 50/175/21  
Shielding (min): 75 dB (10 MHz)  
Shielding (min): 40 dB (1 GHz)  
12NC part number: 4022.438.33384

## DRAWINGS

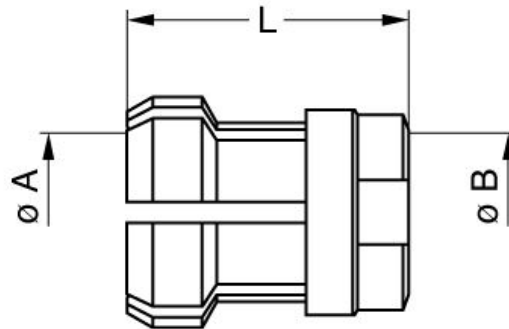

No keying

### Dimensions

	A	B	L
mm.	4.2	4.2	11
in.	0,17	0,17	0,43

## RECOMMENDED BY LEMO

### Tools

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*