

## SPECIFICATIONS:

ELECTRICAL:

INSULATION RESISTANCE:

DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC FOR 1 MIN

WORKING VOLTAGE: 250V

OPERATING TEMPERATURE: -55°C TO +125°C
POWER CONTACT RESISTANCE: 2.0 mOhms MAX.
POWER CONTACT AMPERAGE: SEE P/N KEY

MECHANICAL:

CONTACT INSERTION FORCE: 4.5 Kg MAX. CONTACT SEPARATION FORCE: 0.3 Kg MIN.

MATERIALS:

SHELL:

CONTACTS: COPPER ALLOY, GOLD FLASH


INSULATOR:

230°C PROCESS TEMP. NICKEL PLATED STEEL

5 GOhms MIN.

PBT UL94V-0 RATED

HARDWARE: NICKEL PLATED BRASS



0 = 40 AMP POWER // STANDARD PCB TAILS 1 = 40 AMP POWER // 2.22mm PCB TAILS 2 = 20 AMP POWER // STANDARD PCB TAILS

0 = NO HARDWARE -

1 = 0.098" CN PCB SIDE

2 = 0.236" CN PCB SIDE 3 = 0.236" CN MATING SIDE

4 = 0.237" BOARDLOCK PCB SIDE

5 = 0.224" BOARDLOCK PCB SIDE

1 = GOLD FLASH -

ROHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DESCRIPTION: POWER - VERTICAL - MALE - MACHINED

DRAWN:
P. JENKINS
DATE:

08/22/2011

UNITS = inches [mm]

DO NOT SCALE FROM DRAWING





681M3W3103LYYY

REV

6

DESCRIPTION: POWER - VERTICAL - MALE - MACHINED

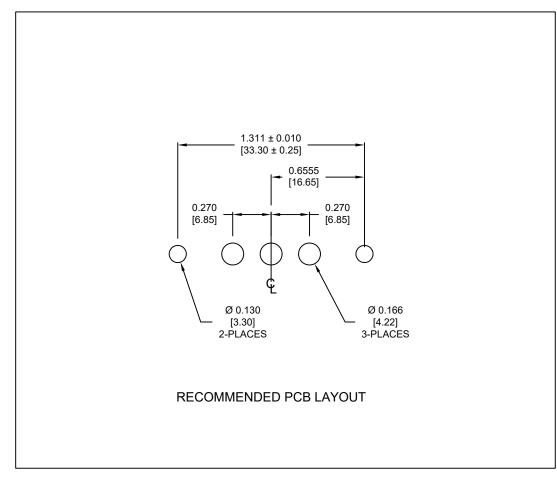

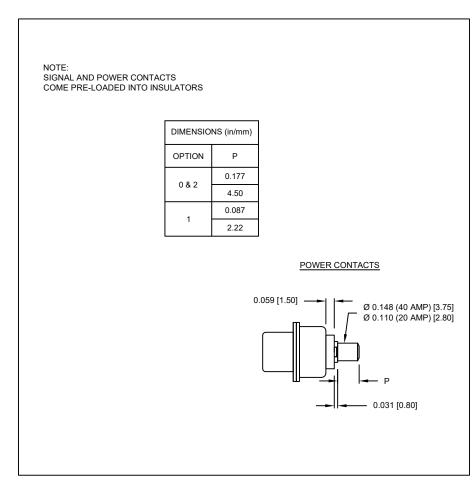

ROHS COMPLIANT

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. DRAWN: P. JENKINS

DATE: 08/22/2011 UNITS = inches [mm]

DO NOT SCALE FROM DRAWING

NorComp

REV SCALE: SHEET 2 NTS 3 DWG NO. 681M3W3103LYYY


6


## ALL CLINCH-NUTS ARE 4-40 INTERNAL THREADS

## **TOLERANCE**:

ALL DIMENSIONS ARE ±0.010


0 ..... NO HARDWARE







0.236 [6.00] —


0.280 [7.10]



1 ..... 0.098" PCB SIDE







ROHS COMPLIANT



DRAWN: P. JENKINS

DATE: 08/22/2011 **NorComp** 

UNITS = inches [mm]

DO NOT SCALE FROM DRAWING SCALE: REV SHEET 3

NTS 3 DWG NO. 681M3W3103LYYY