


RoHS
Ready 



Protection Products for the Automotive Industry


TE
connectivity
AUTOMOTIVE

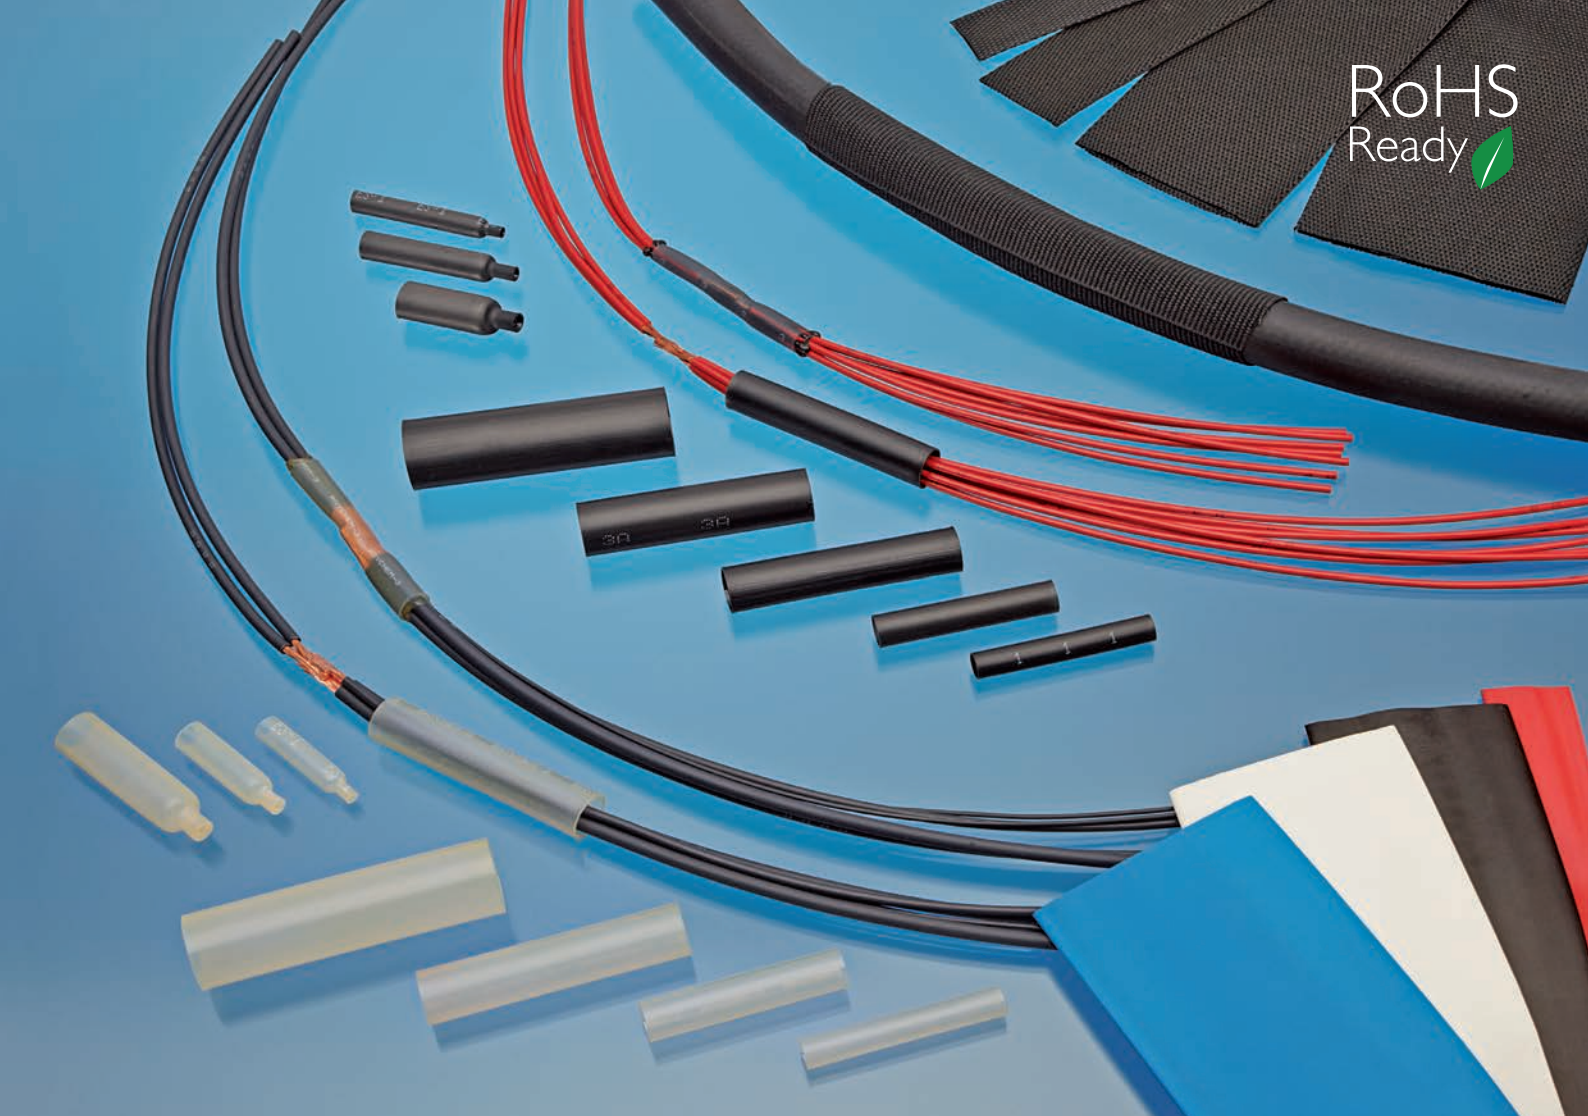

Driver
Information



Powertrain
Systems

THE 5 APPLICATION AREAS



Convenience



Safety & Security
Systems



Body & Chassis
Systems

INNOVATIVE TECHNOLOGIES

TE Automotive – a business segment of TE Connectivity – follows the globalization goals of our customers, speeds up the integration of new technologies and enables our customers access to our vast product portfolio and services.

TERMINALS & CONNECTORS



TE Automotive offers a broad range of high quality terminals and connectors. Our electrical/electronic interconnection products and solutions are used to electrically and mechanically join wires and cables, printed circuit boards, integrated circuit packages and batteries. TE Automotive expanding capabilities include new copper and fiber-optic connectors, wires, cables/cable management systems that are designed to meet automotive industry demands. Our brands encompass the broadest range of connectors in the world, including high-density, high-speed designs for leading-edge communications equipment.

HYBRID & ELECTRIC MOBILITY SOLUTIONS



Complete the connections you need to safely, and reliably make hybrid and electric mobility a reality for everyone, everyday. With over 50 years experience in automotive, industrial and energy connectivity, TE is an expert in pushing innovation from one industry to the next. Our portfolio of AMP+ high voltage relays, resistors, AMP+ headers, connectors, IPT/APT and cable assemblies and vehicle charging solutions are designed to connect and protect electric distribution inside and outside of the vehicle.

CABLE ASSEMBLY SYSTEMS



TE Automotive is your partner for special cable assemblies. We offer research and development capabilities, prototyping, samples as well as manufacturing facilities for special cable assemblies. This includes overmold technology, semi/fully automatic manufacturing, testing equipment and appliances for handling of high volume production.

SENSORS



Contact-less measuring eliminates interference effects, wear and tear, and provides increased reliability. TE Automotive, one of the largest technology providers for the automobile industry, offers contact-less sensors for a variety of applications.

As sensor manufacturer and processing partner, TE Automotive also provides project planning support for new sensor applications, assistance in the selection of the appropriate sensor technology for the respective application, and assistance with defining the corresponding mechanical, electrical and magnetic interface.

TE Automotive has a broad electro-mechanical portfolio that includes robust housing technologies, connector systems, and temperature stable designs based on foil and cable networks. This combination of technologies and experience ensures that reliable and cost effective sensor solutions are available for all application types.

INFOTAINMENT



TE Automotive is focused on providing the best in class infotainment technology to support high speed data communication in the automotive industry. Data communication based optical, coaxial as well as shielded electrical physical layers are supported by a wide product portfolio of Automotive grade connector systems.


Through a deep understanding of the technical properties and requirements of signal integrity and combined with our application knowledge both in the vehicle as well as in the logistics chain, TE Automotive is well positioned to offer the right solution for all current and next generation Infotainment Systems.

INDUCTIVE COIL SYSTEMS



TE Automotive is your source for interconnection technologies for automotive, truck and off-highway OEMs and Tier 1 suppliers. With our global design center in Belgium and manufacturing sites in all regions, TE Automotive's Inductive Coil Systems (ICS) group is ready to design your next-generation coil modules and provide local production support.

The ICS group maintains a leading market position in braking modules and other automotive coil applications. Through early involvement with you on your next design, TE Automotive can offer the benefits of miniaturization, design-in of platform components and optimized process flow for your standard, hybrid and electric vehicle project needs.

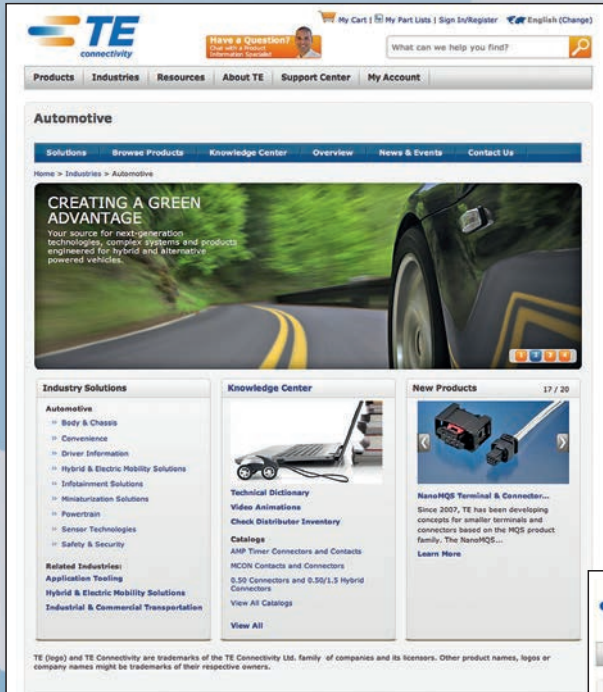



TE Automotive Online



The TE Automotive website is an innovative and interactive source for application information, product updates and technical solutions.

Please contact us at:
www.te.com/automotive

TE Products

www.te.com/en/products/product-landing.html

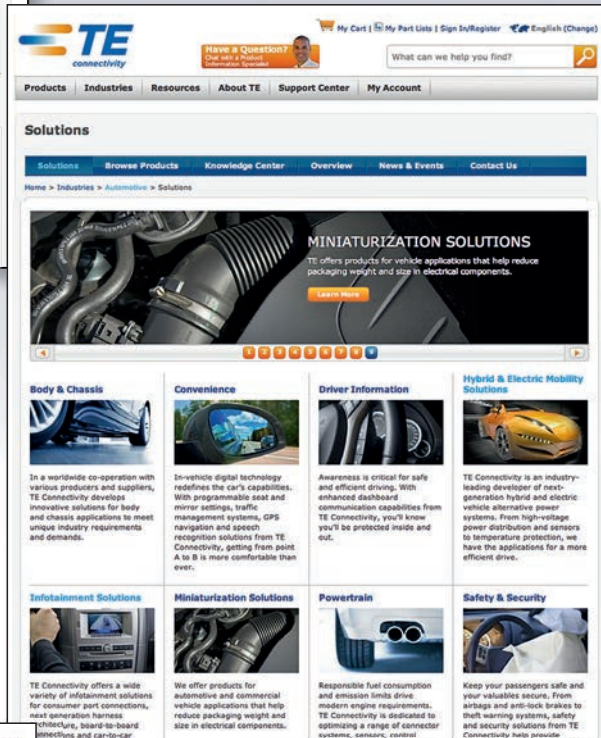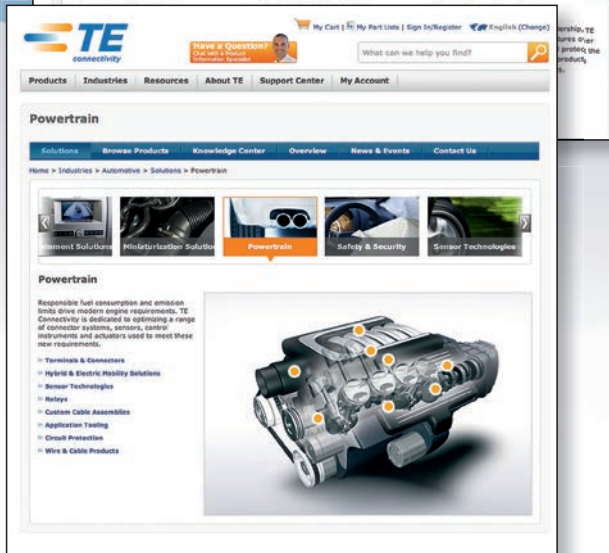

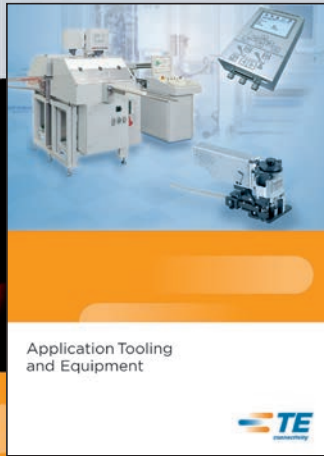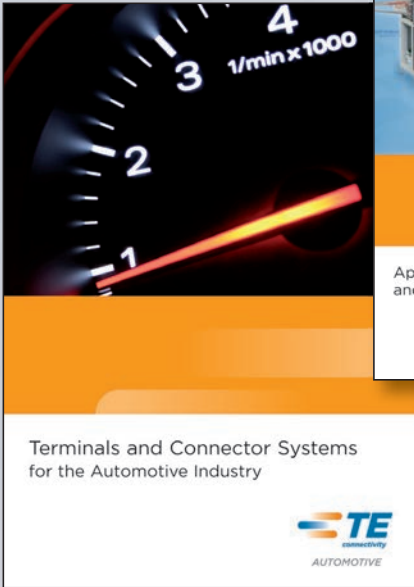

Product and Machine Literature

TE Automotive offers a variety of product specific catalogs, brochures and high impact flyers to help better serve you!

For more information on literature for TE Automotive, please contact your local organization or go to www.te.com/automotive


Product Information Center (PIC)

You can rely on TE Connectivity's PIC Team to provide you support for answers to your general information or technical questions in an efficient and effective manner.

To reach our PIC staff, please contact your local organization or see our Global Contacts page.

Please contact us at:

www.te.com/support-center/

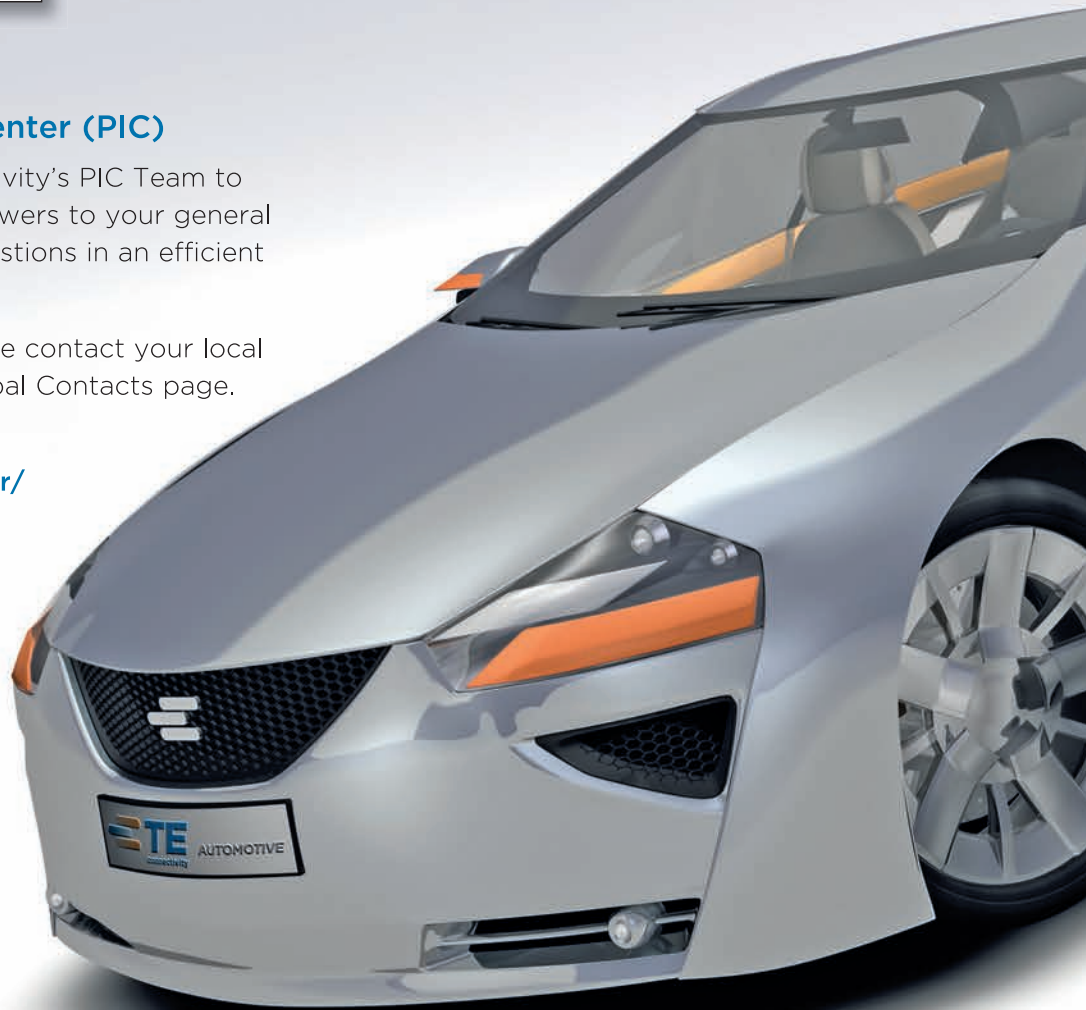





www.te.com

www.te.com/automotive


www.te.com/automotive/most

Quality Guidelines


Incorrect

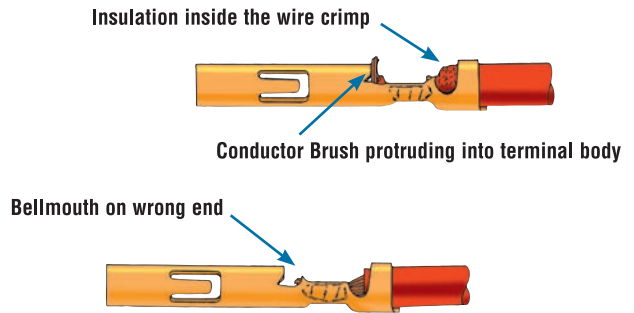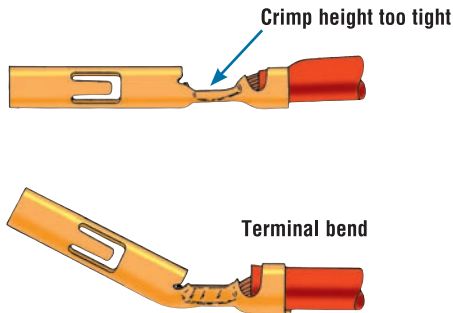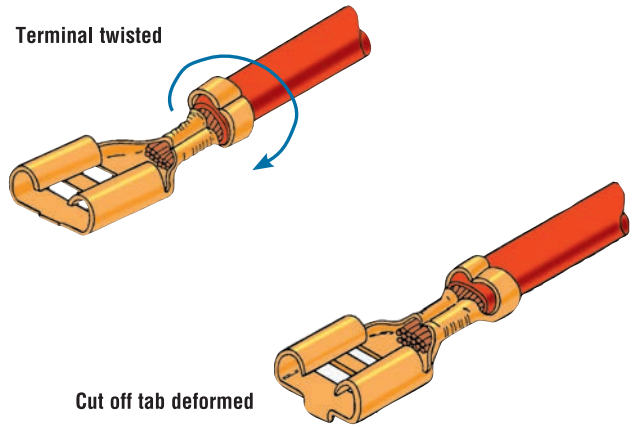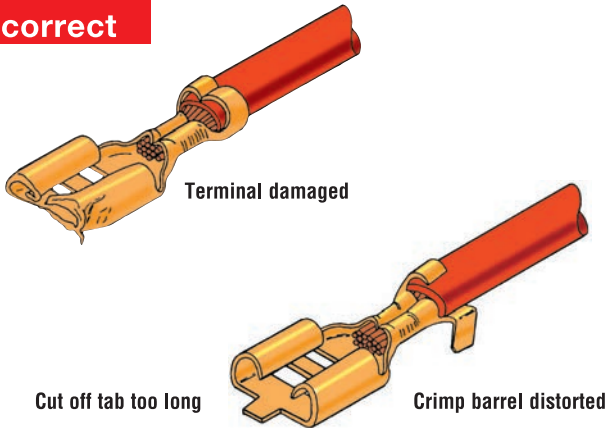

INSULATION CRIMP

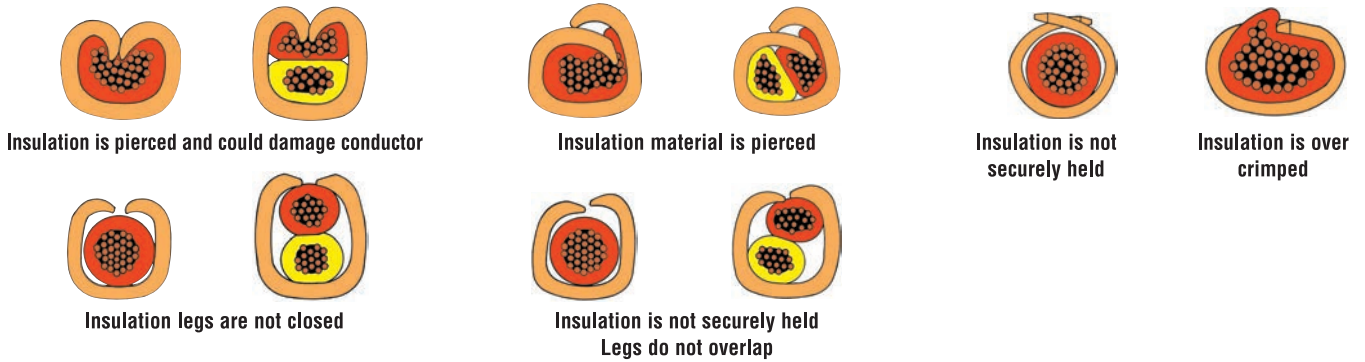


WIRE CRIMP

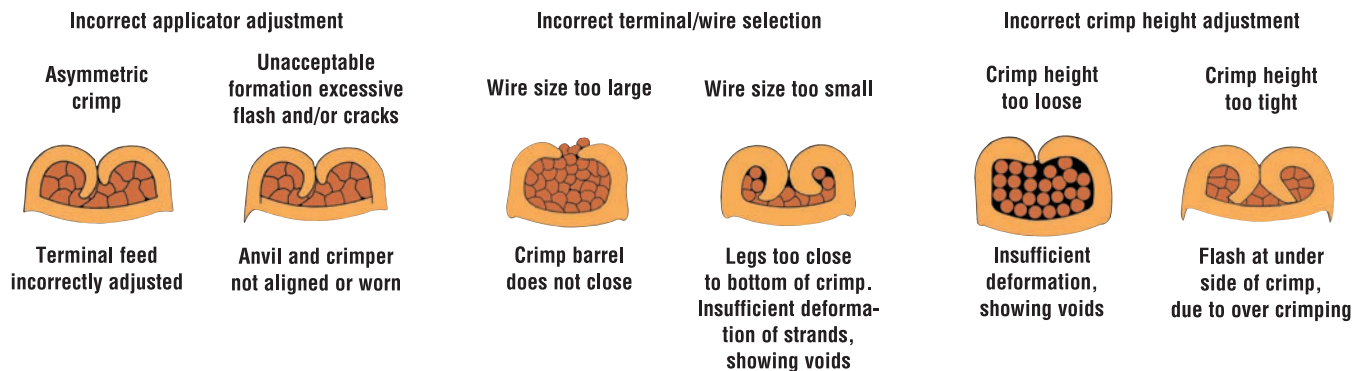

Quality Guidelines

Correct


WIRE CRIMP

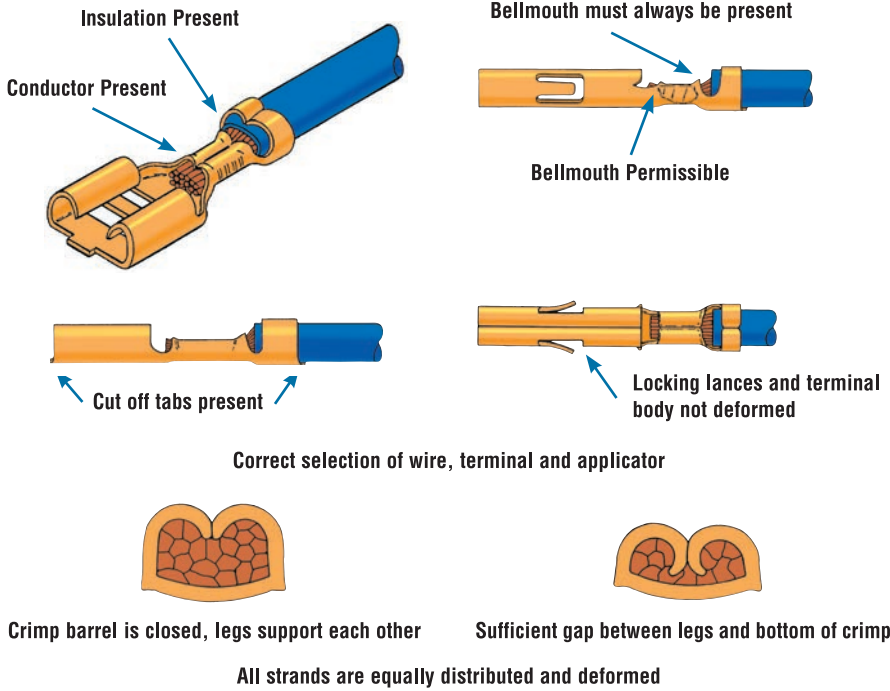

Test

WIRE CRIMP

Crimp height measurement

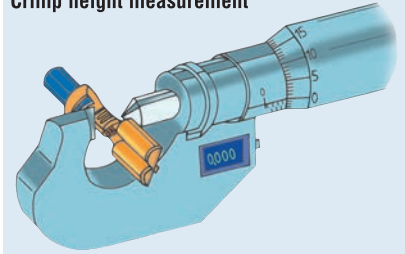


Crimp heights and tolerances

For crimp height tolerances for any given contact, please refer to the relevant application specification.

Examples:


| Contact | Part No. | Wire Range (mm ²) | Tolerance (mm) | Application Spec. |
|---------|------------------|-------------------------------|----------------|-------------------|
| MQS | 962885 962886 | 0.2–0.5 | ±0.03 | 114-18025 |
| JPT | 927775 | 0.5–1.0 | ±0.05 | 114-18050 |
| JPT | 927773 | 1.5–2.5 | ±0.05 | 114-18050 |

Digital Crimp Height Micrometer
(0.001 mm increments) acc. to DIN ISO 9001
Part No. 547203-1




INSULATION CRIMP

Correct Insulation Diameter, Applicator and Terminal

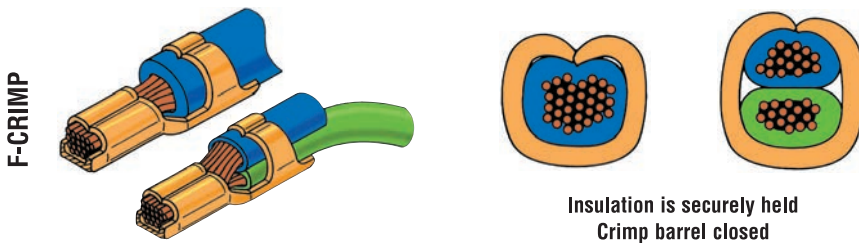


For double wire applications with different size wires always place wire with smallest outer diameter in the bottom

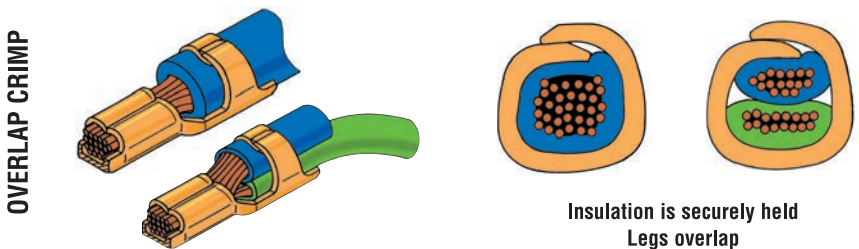

INSULATION CRIMP

Wire crimp without conductor

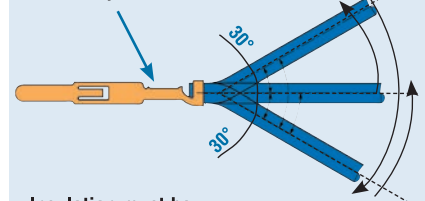

Insulation must be securely held after bend test

Restriction on the Use of Hazardous Substances (RoHS)

Restriction on the use of Hazardous Substances (RoHS)

At TE Connectivity, we're ready to support your RoHS requirements. We've assessed more than 1.5 million end items/components for RoHS compliance, and issued new part numbers where any change was required to eliminate the restricted materials. Part numbers in this catalog are identified as:

RoHS Compliant

Part numbers in this catalog are RoHS Compliant, unless marked otherwise.

These products comply with European Union Directive 2002/95/EC as amended 1 January 2006 that restricts the use of lead, mercury, cadmium, hexavalent chromium, PBB, and PBDE in certain electrical and electronic products sold into the EU as of 1 July 2006.

Note: For purposes of this Catalog, included within the definition of RoHS Compliant are products that are clearly "Out of Scope" of the RoHS Directive such as hand tools and other non-electrical accessories.

Non-RoHS Compliant

These part numbers are identified with a "◆" symbol. These products do not comply with the material restrictions of the European Union Directive 2002/95/EC.

5 of 6 Compliant

A "●" symbol identifies these part numbers. These products do not fully comply with the European Union Directive 2002/95/EC because they contain lead in solderable interfaces (they do not contain any of the other five restricted substances above allowable limits). However, these products may be suitable for use in RoHS applications where there is an application-based exception for lead in solders, such as the server, storage, or networking infrastructure exemption.

Note: Information regarding RoHS compliance is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information provided by our suppliers. This information is subject to change. For latest compliance status, refer to our website referenced below.

Getting the information you need

Our comprehensive on-line RoHS Customer Support Center provides a forum to answer your questions and support your RoHS needs. A RoHS FAQ (Frequently Asked Questions) is available with links to more detailed information. You can also submit RoHS questions and receive a response within 24 hours during a normal work week. The Support Center also provides:

- Cross-Reference from Non-compliant to Compliant Products
- Ability to browse RoHS Compliant Products in our on-line catalog: <http://www.te.com/commerce/alt/RohsAltHome.do>
- Downloadable Technical Data Customer Information Presentation
- More detailed information regarding the definitions used above

So whatever your questions when it comes to RoHS, we've got the answers at <http://www.te.com/customersupport/rohssupportcenter/>

RoHS
Customer
Support
Center 

AWG Conversion Table (Average Value)

Conversion Tables

Most of the wire size ranges are mentioned in mm², as well as the insulation diameters which are in many cases only in mm's.

We therefore included the conversion tables on page X and page XI.

Please note that wire and insulation sizes are for guidance only.

Consult the customer drawing for precise detail.

| AWG Code | Diameter (Inch) | Diameter (mm) | F (mm ²) |
|----------|-----------------|---------------|----------------------|
| 000000 | 0.5800 | 14.733 | 170.0 |
| 00000 | 0.5165 | 13.13 | 135.0 |
| 0000 | 0.4600 | 11.684 | 103.8 |
| 000 | 0.4096 | 10.40 | 79.0 |
| 00 | 0.3648 | 9.27 | 67.5 |
| 0 | 0.3249 | 8.25 | 53.4 |
| 1 | 0.2893 | 7.34 | 42.2 |
| 2 | 0.2576 | 6.55 | 33.7 |
| 3 | 0.2294 | 5.82 | 26.6 |
| 4 | 0.2043 | 5.18 | 21.0 |
| 5 | 0.1819 | 4.62 | 16.9 |
| 6 | 0.1620 | 4.115 | 13.25 |
| 7 | 0.1443 | 3.66 | 10.25 |
| 8 | 0.1285 | 3.26 | 8.34 |
| 9 | 0.1144 | 2.90 | 6.6 |
| 10 | 0.1019 | 2.59 | 5.27 |
| 11 | 0.0907 | 2.30 | 4.15 |
| 12 | 0.0808 | 2.05 | 3.3 |
| 13 | 0.0720 | 1.83 | 2.63 |
| 14 | 0.0641 | 1.63 | 2.08 |
| 15 | 0.0571 | 1.45 | 1.65 |
| 16 | 0.0508 | 1.29 | 1.305 |
| 17 | 0.0453 | 1.14 | 1.01 |
| 18 | 0.0403 | 1.02 | 0.79 |
| 19 | 0.0359 | 0.91 | 0.65 |
| 20 | 0.0320 | 0.81 | 0.51 |
| 21 | 0.0285 | 0.72 | 0.407 |
| 22 | 0.0253 | 0.64 | 0.32 |
| 23 | 0.0226 | 0.57 | 0.255 |
| 24 | 0.0201 | 0.51 | 0.205 |
| 25 | 0.0179 | 0.455 | 0.162 |
| 26 | 0.0159 | 0.40 | 0.125 |
| 27 | 0.0142 | 0.36 | 0.102 |
| 28 | 0.0126 | 0.320 | 0.08 |
| 29 | 0.0113 | 0.287 | 0.0646 |
| 30 | 0.0100 | 0.254 | 0.0516 |
| 31 | 0.0089 | 0.226 | 0.04 |
| 32 | 0.0080 | 0.203 | 0.0324 |
| 33 | 0.0071 | 0.180 | 0.0255 |
| 34 | 0.0063 | 0.160 | 0.02 |
| 35 | 0.0056 | 0.142 | 0.0158 |
| 36 | 0.0050 | 0.127 | 0.0127 |
| 37 | 0.0045 | 0.114 | 0.01 |
| 38 | 0.0040 | 0.101 | 0.008 |
| 39 | 0.0035 | 0.089 | 0.0062 |
| 40 | 0.0031 | 0.079 | 0.0049 |
| 41 | 0.0028 | 0.071 | 0.00395 |
| 42 | 0.0025 | 0.064 | 0.00321 |
| 43 | 0.0022 | 0.056 | 0.00246 |
| 44 | 0.00198 | 0.050 | 0.00196 |
| 45 | 0.00176 | 0.045 | |
| 46 | 0.00157 | 0.040 | |
| 47 | 0.00140 | 0.036 | |
| 48 | 0.00124 | 0.031 | |
| 49 | 0.00110 | 0.028 | |
| 50 | 0.00099 | 0.025 | |

FLK/FLR Cable

FLK and FLR stand for German DIN (72551) abbreviations.

FLK means:

In German:
 • Fahrzeug Leitung Kunststoff

In English:
 • Vehicle Cable Plastic

FLR means:

In German:
 • Fahrzeug Leitung Reduziert

In English:
 • Thin Walled Cable
 (reduced insulation thickness)

Remark: Starting from 0.03 mm² (AWG 32) a wire can be crimped.

Conversion Table – Inch/mm

| Inch | 0 | 0.001 | 0.002 | 0.003 | 0.004 | 0.005 | 0.006 | 0.007 | 0.008 | 0.009 |
|-------------|----------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 0 | 0 | 0.0254 | 0.0508 | 0.0762 | 0.1016 | 0.1270 | 0.1524 | 0.1778 | 0.2032 | 0.2286 |
| 0.010 | 0.2540 | 0.2794 | 0.3048 | 0.3302 | 0.3556 | 0.3810 | 0.4064 | 0.4318 | 0.4572 | 0.4826 |
| 0.020 | 0.5080 | 0.5334 | 0.5588 | 0.5842 | 0.6096 | 0.6350 | 0.6604 | 0.6858 | 0.7112 | 0.7366 |
| 0.030 | 0.7620 | 0.7874 | 0.8128 | 0.8382 | 0.8636 | 0.8890 | 0.9144 | 0.9398 | 0.9652 | 0.9906 |
| 0.040 | 1.0160 | 1.0414 | 1.0668 | 1.0922 | 1.1176 | 1.1430 | 1.1684 | 1.1938 | 1.2192 | 1.2446 |
| 0.050 | 1.2700 | 1.2954 | 1.3208 | 1.3462 | 1.3716 | 1.3970 | 1.4224 | 1.4478 | 1.4732 | 1.4986 |
| 0.060 | 1.5240 | 1.5494 | 1.5748 | 1.6002 | 1.6256 | 1.6510 | 1.6764 | 1.7018 | 1.7272 | 1.7526 |
| 0.070 | 1.7780 | 1.8034 | 1.8288 | 1.8542 | 1.8796 | 1.9050 | 1.9304 | 1.9558 | 1.9812 | 2.0066 |
| 0.080 | 2.0320 | 2.0574 | 2.0828 | 2.1062 | 2.1336 | 2.1590 | 2.1844 | 2.2098 | 2.2352 | 2.2606 |
| 0.090 | 2.2860 | 2.3114 | 2.3368 | 2.3622 | 2.3876 | 2.4130 | 2.4384 | 2.4638 | 2.4892 | 2.5146 |
| 0.100 | 2.5400 | 2.5654 | 2.5908 | 2.6162 | 2.6416 | 2.6670 | 2.6924 | 2.7178 | 2.7432 | 2.7686 |
| 0.110 | 2.7940 | 2.8194 | 2.8448 | 2.8702 | 2.8956 | 2.9210 | 2.9464 | 2.9718 | 2.9972 | 3.0226 |
| 0.120 | 3.0480 | 3.0734 | 3.0988 | 3.1242 | 3.1496 | 3.1750 | 3.2004 | 3.2258 | 3.2512 | 3.2766 |
| 0.130 | 3.3020 | 3.3274 | 3.3528 | 3.3782 | 3.4036 | 3.4290 | 3.4544 | 3.4798 | 3.5052 | 3.5306 |
| 0.140 | 3.5560 | 3.5814 | 3.6068 | 3.6322 | 3.6576 | 3.6830 | 3.7084 | 3.7338 | 3.7592 | 3.7846 |
| 0.150 | 3.8100 | 3.8354 | 3.8608 | 3.8862 | 3.9116 | 3.9370 | 3.9624 | 3.9878 | 4.0132 | 4.0386 |
| 0.160 | 4.0640 | 4.0894 | 4.1148 | 4.1402 | 4.1656 | 4.1910 | 4.2164 | 4.2418 | 4.2672 | 4.2926 |
| 0.170 | 4.3180 | 4.3434 | 4.3688 | 4.3942 | 4.4196 | 4.4450 | 4.4704 | 4.4958 | 4.5212 | 4.5466 |
| 0.180 | 4.5720 | 4.5974 | 4.6228 | 4.6482 | 4.6736 | 4.6990 | 4.7244 | 4.7498 | 4.7752 | 4.8006 |
| 0.190 | 4.8260 | 4.8514 | 4.8768 | 4.9022 | 4.9276 | 4.9530 | 4.9784 | 5.0038 | 5.0292 | 5.0546 |
| 0.200 | 5.0800 | 5.1054 | 5.1308 | 5.1562 | 5.1816 | 5.2070 | 5.2324 | 5.2578 | 5.2832 | 5.3086 |
| 0.210 | 5.3340 | 5.3594 | 5.3848 | 5.4102 | 5.4356 | 5.4610 | 5.4864 | 5.5118 | 5.5372 | 5.5626 |
| 0.220 | 5.5880 | 5.6134 | 5.6388 | 5.6642 | 5.6896 | 5.7150 | 5.7404 | 5.7658 | 5.7912 | 5.8166 |
| 0.230 | 5.8420 | 5.8674 | 5.8928 | 5.9182 | 5.9436 | 5.9690 | 5.9944 | 6.0198 | 6.0452 | 6.0706 |
| 0.240 | 6.0960 | 6.1214 | 6.1468 | 6.1722 | 6.1976 | 6.2230 | 6.2484 | 6.2738 | 6.2992 | 6.3246 |
| 0.250 | 6.3500 | 6.3754 | 6.4008 | 6.4262 | 6.4516 | 6.4770 | 6.5024 | 6.5278 | 6.5532 | 6.5786 |
| 0.260 | 6.6040 | 6.6294 | 6.6548 | 6.6802 | 6.7056 | 6.7310 | 6.7564 | 6.7818 | 6.8072 | 6.8326 |
| 0.270 | 6.8580 | 6.8834 | 6.9088 | 6.9342 | 6.9596 | 6.9850 | 7.0104 | 7.0358 | 7.0612 | 7.0866 |
| 0.280 | 7.1120 | 7.1374 | 7.1628 | 7.1882 | 7.2136 | 7.2390 | 7.2644 | 7.2898 | 7.3152 | 7.3406 |
| 0.290 | 7.3660 | 7.3914 | 7.4168 | 7.4422 | 7.4676 | 7.4930 | 7.5184 | 7.5438 | 7.5692 | 7.5946 |
| 0.300 | 7.6200 | 7.6454 | 7.6708 | 7.6962 | 7.7216 | 7.7470 | 7.7724 | 7.7978 | 7.8232 | 7.8486 |
| 0.310 | 7.8740 | 7.8994 | 7.9248 | 7.9502 | 7.9756 | 8.0010 | 8.0264 | 8.0518 | 8.0772 | 8.1026 |
| 0.320 | 8.1280 | 8.1534 | 8.1788 | 8.2042 | 8.2296 | 8.2550 | 8.2804 | 8.3058 | 8.3312 | 8.3566 |
| 0.330 | 8.3820 | 8.4074 | 8.4328 | 8.4582 | 8.4836 | 8.5090 | 8.5344 | 8.5598 | 8.5852 | 8.6106 |
| 0.340 | 8.6360 | 8.6614 | 8.6868 | 8.7122 | 8.7376 | 8.7630 | 8.7884 | 8.8138 | 8.8392 | 8.8646 |
| 0.350 | 8.8900 | 8.9154 | 8.9408 | 8.9662 | 8.9916 | 9.0170 | 9.0424 | 9.0678 | 9.0932 | 9.1186 |
| 0.360 | 9.1440 | 9.1694 | 9.1948 | 9.2202 | 9.2456 | 9.2710 | 9.2964 | 9.3218 | 9.3472 | 9.3726 |
| 0.370 | 9.3980 | 9.4234 | 9.4488 | 9.4742 | 9.4996 | 9.5250 | 9.5504 | 9.5758 | 9.6012 | 9.6266 |
| 0.380 | 9.6520 | 9.6774 | 9.7028 | 9.7282 | 9.7536 | 9.7790 | 9.8044 | 9.8298 | 9.8552 | 9.8806 |
| 0.390 | 9.9060 | 9.9314 | 9.9568 | 9.9822 | 10.0076 | 10.0330 | 10.0584 | 10.0838 | 10.1092 | 10.1346 |
| 0.400 | 10.1600 | 10.1854 | 10.2108 | 10.2362 | 10.2616 | 10.2870 | 10.3124 | 10.3378 | 10.3632 | 10.3886 |
| 0.410 | 10.4140 | 10.4394 | 10.4648 | 10.4902 | 10.5156 | 10.5410 | 10.5664 | 10.5918 | 10.6172 | 10.6426 |
| 0.420 | 10.6680 | 10.6934 | 10.7188 | 10.7442 | 10.7696 | 10.7950 | 10.8204 | 10.8458 | 10.8712 | 10.8966 |
| 0.430 | 10.9220 | 10.9474 | 10.9728 | 10.9982 | 11.0236 | 11.0490 | 11.0744 | 11.0998 | 11.1252 | 11.1506 |
| 0.440 | 11.1760 | 11.2014 | 11.2268 | 11.2522 | 11.2776 | 11.3030 | 11.3284 | 11.3538 | 11.3792 | 11.4046 |
| 0.450 | 11.4300 | 11.4554 | 11.4808 | 11.5062 | 11.5316 | 11.5510 | 11.5824 | 11.6078 | 11.6332 | 11.6586 |
| 0.460 | 11.6840 | 11.7094 | 11.7348 | 11.7602 | 11.7856 | 11.8110 | 11.8364 | 11.8618 | 11.8872 | 11.9126 |
| 0.470 | 11.9380 | 11.9634 | 11.9888 | 12.0142 | 12.0396 | 12.0650 | 12.0904 | 12.1158 | 12.1412 | 12.1666 |
| 0.480 | 12.1920 | 12.2174 | 12.2428 | 12.2682 | 12.2936 | 12.3190 | 12.3444 | 12.3698 | 12.3952 | 12.4206 |
| 0.490 | 12.4460 | 12.4714 | 12.4968 | 12.5222 | 12.5476 | 12.5730 | 12.5984 | 12.6238 | 12.6492 | 12.6746 |
| 0.500 | 12.7000 | | | | | | | | | |
| Inch | 0 | 0.001 | 0.002 | 0.003 | 0.004 | 0.005 | 0.006 | 0.007 | 0.008 | 0.009 |

Conversion Table – Inch/mm (continued)

| Inch | 0 | 0.001 | 0.002 | 0.003 | 0.004 | 0.005 | 0.006 | 0.007 | 0.008 | 0.009 |
|-------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| 0.500 | 12.7000 | 12.7254 | 12.7508 | 12.7762 | 12.8016 | 12.8270 | 12.8524 | 12.8778 | 12.9032 | 12.9286 |
| 0.510 | 12.9540 | 12.9794 | 13.0048 | 13.0302 | 13.0556 | 13.0810 | 13.1064 | 13.1318 | 13.1572 | 13.1826 |
| 0.520 | 13.2080 | 13.2334 | 13.2588 | 13.2842 | 13.3096 | 13.3350 | 13.3604 | 13.3858 | 13.4112 | 13.4366 |
| 0.530 | 13.4620 | 13.4874 | 13.5128 | 15.5382 | 13.5636 | 13.5890 | 13.6144 | 13.6398 | 13.6652 | 13.6906 |
| 0.540 | 13.7160 | 13.7414 | 13.7668 | 13.7922 | 13.8176 | 13.8430 | 13.8684 | 13.8938 | 13.9192 | 13.9446 |
| 0.550 | 13.9700 | 13.9954 | 14.0208 | 14.0462 | 14.0716 | 14.0970 | 14.1224 | 14.1478 | 14.1732 | 14.1986 |
| 0.560 | 14.2240 | 14.2494 | 14.2748 | 14.3002 | 14.3256 | 14.3510 | 14.3764 | 14.4018 | 14.4272 | 14.4526 |
| 0.570 | 14.4780 | 14.5034 | 14.5288 | 14.5542 | 14.5796 | 14.6050 | 14.6304 | 14.6558 | 14.6812 | 14.7066 |
| 0.580 | 14.7320 | 14.7574 | 14.7828 | 14.8082 | 14.8336 | 14.8590 | 14.8844 | 14.9098 | 14.9352 | 14.9606 |
| 0.590 | 14.9860 | 15.0114 | 15.0368 | 15.0622 | 15.0876 | 15.1130 | 15.1384 | 15.1638 | 15.1892 | 15.2146 |
| 0.600 | 15.2400 | 15.2654 | 15.2908 | 15.3162 | 15.3416 | 15.3670 | 15.3924 | 15.4178 | 15.4432 | 15.4686 |
| 0.610 | 15.4940 | 15.5194 | 15.5448 | 15.5702 | 15.5956 | 15.6210 | 15.6464 | 15.6718 | 15.6972 | 15.7226 |
| 0.620 | 15.7480 | 15.7734 | 15.7988 | 15.8242 | 15.8496 | 15.8750 | 15.9004 | 15.9258 | 15.9512 | 15.9766 |
| 0.630 | 16.0020 | 16.0274 | 16.0528 | 16.0782 | 16.1036 | 16.1290 | 16.1544 | 16.1798 | 16.2052 | 16.2306 |
| 0.640 | 16.2560 | 16.2814 | 16.3068 | 16.3322 | 16.3576 | 16.3830 | 16.4084 | 16.4338 | 16.4592 | 16.4846 |
| 0.650 | 16.5100 | 16.5354 | 16.5608 | 16.5862 | 16.6116 | 16.6370 | 16.6624 | 16.6878 | 16.7132 | 16.7386 |
| 0.660 | 16.7640 | 16.7894 | 16.8148 | 16.8402 | 16.8656 | 16.8910 | 16.9164 | 16.9418 | 16.9672 | 16.9926 |
| 0.670 | 17.0180 | 17.0434 | 17.0688 | 17.0942 | 17.1196 | 17.1450 | 17.1704 | 17.1958 | 17.2212 | 17.2466 |
| 0.680 | 17.2720 | 17.2974 | 17.3228 | 17.3482 | 17.3736 | 17.3990 | 17.4244 | 17.4498 | 17.4752 | 17.5006 |
| 0.690 | 17.5260 | 17.5514 | 17.5768 | 17.6022 | 17.6276 | 17.6530 | 17.6784 | 17.7038 | 17.7292 | 17.7546 |
| 0.700 | 17.7800 | 17.8054 | 17.8308 | 17.8562 | 17.8816 | 17.9070 | 17.9324 | 17.9528 | 17.9832 | 18.0086 |
| 0.710 | 18.0340 | 18.0594 | 18.0848 | 18.1102 | 18.1356 | 18.1610 | 18.1864 | 18.2118 | 18.2372 | 18.2626 |
| 0.720 | 18.2880 | 18.3134 | 18.3388 | 18.3642 | 18.3896 | 18.4150 | 18.4404 | 18.4658 | 18.4912 | 19.5166 |
| 0.730 | 18.5420 | 18.5674 | 18.5928 | 18.6182 | 18.6436 | 18.6690 | 18.6944 | 18.7198 | 18.7452 | 18.7706 |
| 0.740 | 18.7960 | 18.8214 | 18.8468 | 18.8722 | 18.8976 | 18.9230 | 18.9484 | 18.9738 | 18.9992 | 19.0246 |
| 0.750 | 19.0500 | 19.0754 | 19.1008 | 19.1262 | 19.1516 | 19.1170 | 19.2024 | 19.2278 | 19.2532 | 19.2786 |
| 0.760 | 19.3040 | 19.3294 | 19.3548 | 19.3802 | 19.4056 | 19.4310 | 19.4564 | 19.4818 | 19.5072 | 19.5326 |
| 0.770 | 19.5580 | 19.5834 | 19.6088 | 19.6342 | 19.6596 | 19.6850 | 19.7104 | 19.7358 | 19.7612 | 19.7866 |
| 0.780 | 19.8120 | 19.8374 | 19.8628 | 19.8882 | 19.9136 | 19.9390 | 19.9644 | 19.9898 | 20.0152 | 20.0406 |
| 0.790 | 20.0660 | 20.0914 | 20.1168 | 20.1422 | 20.1676 | 20.1930 | 20.2184 | 20.2438 | 20.2692 | 20.2946 |
| 0.800 | 20.3200 | 20.3454 | 20.3708 | 20.3962 | 20.4216 | 20.4470 | 20.4724 | 20.4978 | 20.5232 | 20.5486 |
| 0.810 | 20.5740 | 20.5994 | 20.6248 | 20.6502 | 20.6756 | 20.7010 | 20.7264 | 20.7518 | 20.7772 | 20.8026 |
| 0.820 | 20.8280 | 20.8534 | 20.8788 | 20.9042 | 20.9296 | 20.9550 | 20.9804 | 21.0058 | 21.0312 | 21.0566 |
| 0.830 | 21.0820 | 21.1074 | 21.1328 | 21.1582 | 21.1836 | 21.2090 | 21.2344 | 21.2598 | 21.2852 | 21.3106 |
| 0.840 | 21.3360 | 21.3614 | 21.3868 | 21.4122 | 21.4376 | 21.4630 | 21.4884 | 21.5138 | 21.5392 | 21.5646 |
| 0.850 | 21.5900 | 21.6154 | 21.6408 | 21.6662 | 21.6916 | 21.7170 | 21.7424 | 21.7678 | 21.7932 | 21.8186 |
| 0.860 | 21.8440 | 21.8694 | 21.8948 | 21.9202 | 21.9456 | 21.9710 | 21.9964 | 22.0218 | 22.0472 | 22.0726 |
| 0.870 | 22.0980 | 22.1234 | 22.1488 | 22.1742 | 22.1996 | 22.2250 | 22.2504 | 22.2758 | 22.3012 | 22.3266 |
| 0.880 | 22.3520 | 22.3774 | 22.4028 | 22.4282 | 22.4536 | 22.4790 | 22.5044 | 22.5298 | 22.5552 | 22.5806 |
| 0.890 | 22.6060 | 22.6314 | 22.6568 | 22.6822 | 22.7076 | 22.7330 | 22.7584 | 22.7838 | 22.8092 | 22.8346 |
| 0.900 | 22.8600 | 22.8854 | 22.9108 | 22.9362 | 22.9616 | 22.9870 | 23.0124 | 23.0378 | 23.0632 | 23.0886 |
| 0.910 | 23.1140 | 23.1394 | 23.1648 | 23.1902 | 23.2156 | 23.2410 | 23.2664 | 23.2918 | 23.3172 | 23.3426 |
| 0.920 | 23.3680 | 23.3934 | 23.4188 | 23.4442 | 23.4696 | 23.4950 | 23.5204 | 23.5458 | 23.5712 | 23.5966 |
| 0.930 | 23.6220 | 23.6474 | 23.6728 | 23.6982 | 23.7236 | 23.7490 | 23.7744 | 23.7998 | 23.8252 | 23.8506 |
| 0.940 | 23.8760 | 23.9014 | 23.9268 | 23.9522 | 23.9776 | 24.0030 | 24.0284 | 24.0538 | 24.0792 | 24.1046 |
| 0.950 | 24.1300 | 24.1554 | 24.1808 | 24.2062 | 24.2316 | 24.2570 | 24.2824 | 24.3078 | 24.3332 | 24.3586 |
| 0.960 | 24.3840 | 24.4094 | 24.4348 | 24.4602 | 24.4856 | 24.5110 | 24.5364 | 24.5618 | 24.5812 | 24.6126 |
| 0.970 | 24.6380 | 24.6634 | 24.6888 | 24.7142 | 24.7396 | 24.7650 | 24.7904 | 24.8158 | 24.8412 | 24.8666 |
| 0.980 | 24.8920 | 24.9174 | 24.9428 | 24.9682 | 24.9936 | 25.0190 | 25.0444 | 25.0698 | 25.0952 | 25.1206 |
| 0.990 | 25.1460 | 25.1714 | 25.1968 | 25.2222 | 25.2476 | 25.2730 | 25.2984 | 25.3228 | 25.3492 | 25.3746 |
| 1.000 | 25.4000 | | | | | | | | | |
| Inch | 0 | 0.001 | 0.002 | 0.003 | 0.004 | 0.005 | 0.006 | 0.007 | 0.008 | 0.009 |


Page

| Protection Products | | |
|-------------------------------------------|-------|---|
| Introduction | 1 | ✓ |
| Core Technologies | 2-4 | ✓ |
| | | |
| Harness Design Applications | 5 | ✓ |
| CRN tubing | 6-7 | ✓ |
| ES Caps | 8-9 | ✓ |
| FRAG tubing | 10-11 | ✓ |
| HTAT tubing | 12-13 | ✓ |
| LSTT tubing | 14-15 | ✓ |
| QSZH-125 tubing | 16-17 | ✓ |
| RayBlock 85 Sealing Kit | 18-19 | ✓ |
| RayBlock 105 Sealing Kit | 20-21 | ✓ |
| RBK ILS-125/RBK-ILS-125-NR500 tubing | 22-23 | ✓ |
| RBK RTP-125 tubing | 24-25 | ✓ |
| RBK VWS-125 tubing | 26-27 | ✓ |
| RPPM tubing | 28-29 | ✓ |
| RW-175 tubing | 30-31 | ✓ |
| RW-200/RW-200-E tubing | 32-33 | ✓ |
| SCL tubing | 34-35 | ✓ |
| SCT tubing | 36-37 | ✓ |
| VERSAFIT tubing | 38-39 | ✓ |
| | | |
| Mechanical Protection Applications | 41 | ✓ |
| CGPT tubing | 42-43 | ✓ |
| HCTE tubing | 44-45 | ✓ |
| HFT 5000 tubing | 46-47 | ✓ |
| NETM tubing | 48-49 | ✓ |
| RNF-100 tubing | 50-51 | ✓ |
| RNF-150 tubing | 52-53 | ✓ |
| RNF-3000 tubing | 54-55 | ✓ |
| RPPM tubing | 56-57 | |
| RPT-120 tubing | 58-59 | ✓ |

THE PRODUCTS




| ✓ | ✓ | ✓ | ✓ |
|---|---|---|---|
| ✓ | ✓ | ✓ | ✓ |
| | | | |
| ✓ | ✓ | ✓ | ✓ |
| ✓ | | | ✓ |
| ✓ | ✓ | ✓ | ✓ |
| ✓ | | | ✓ |
| ✓ | ✓ | ✓ | ✓ |
| ✓ | ✓ | ✓ | ✓ |
| ✓ | | | ✓ |
| ✓ | | | ✓ |
| ✓ | | | ✓ |
| ✓ | | | ✓ |
| ✓ | | | ✓ |
| ✓ | | | ✓ |
| ✓ | | | ✓ |
| ✓ | | | ✓ |
| ✓ | ✓ | ✓ | ✓ |
| ✓ | ✓ | ✓ | ✓ |
| ✓ | ✓ | ✓ | ✓ |
| ✓ | ✓ | ✓ | ✓ |
| ✓ | | | ✓ |
| ✓ | ✓ | ✓ | ✓ |
| ✓ | ✓ | ✓ | ✓ |
| ✓ | ✓ | ✓ | ✓ |
| ✓ | | | ✓ |
| ✓ | ✓ | ✓ | ✓ |
| ✓ | ✓ | ✓ | ✓ |
| ✓ | ✓ | ✓ | ✓ |
| ✓ | | | ✓ |


Page

| Protection Products | | |
|--------------------------------------|---------|---|
| Fluid Management Applications | 61 | ✓ |
| AP-2000 tubing | 62 – 63 | ✓ |
| ATUM tubing | 64 – 65 | ✓ |
| DWTC tubing | 66 – 67 | ✓ |
| HFT 5000 tubing | 68 – 69 | ✓ |
| RPT-120 tubing | 70 – 71 | ✓ |
| TECT tubing | 72 – 73 | ✓ |
| Application Equipment | 75 | ✓ |
| AD-3050 SEAL-TEST-EQUIP | 76 – 77 | ✓ |
| CV-1981, CV-1983 Heating Tools | 78 – 79 | ✓ |
| CV-OBHAT-1600W System | 80 – 81 | ✓ |
| IR-1891 Shuttle Machine | 82 – 83 | ✓ |
| Model 19 Conveyor Heater | 84 – 85 | ✓ |
| Model 105 Tunnel Oven | 86 – 87 | ✓ |
| RBK-ILS-Processor MkII | 88 – 89 | ✓ |
| Disclaimer and Trademarks | 92 | |




Engineering Notes

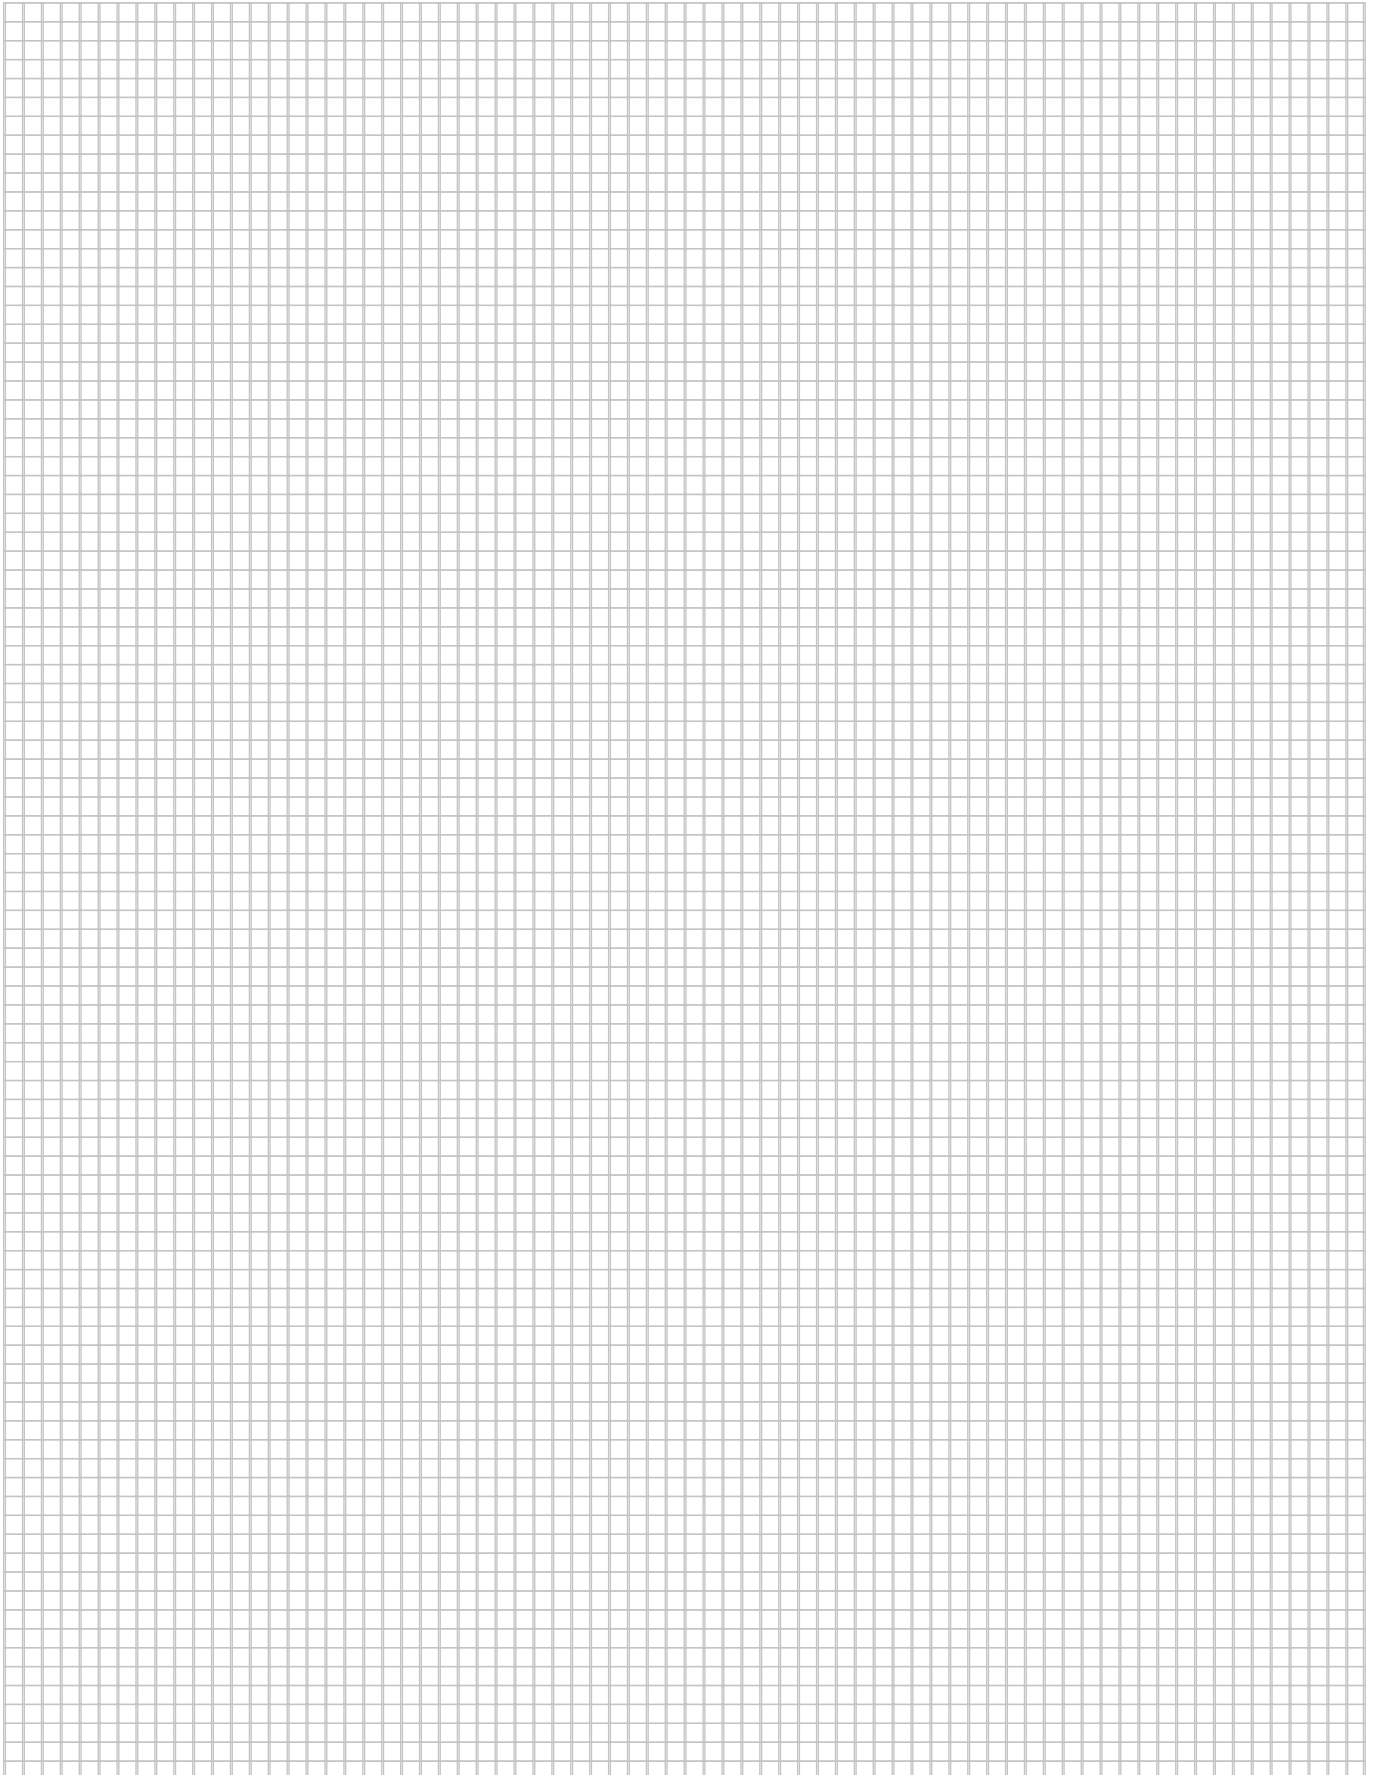

Introduction



Designed to be durable and engineered to be cost effective. The wide range of our tubing products is the way to provide effective electrical insulation, mechanical and environmental protection.

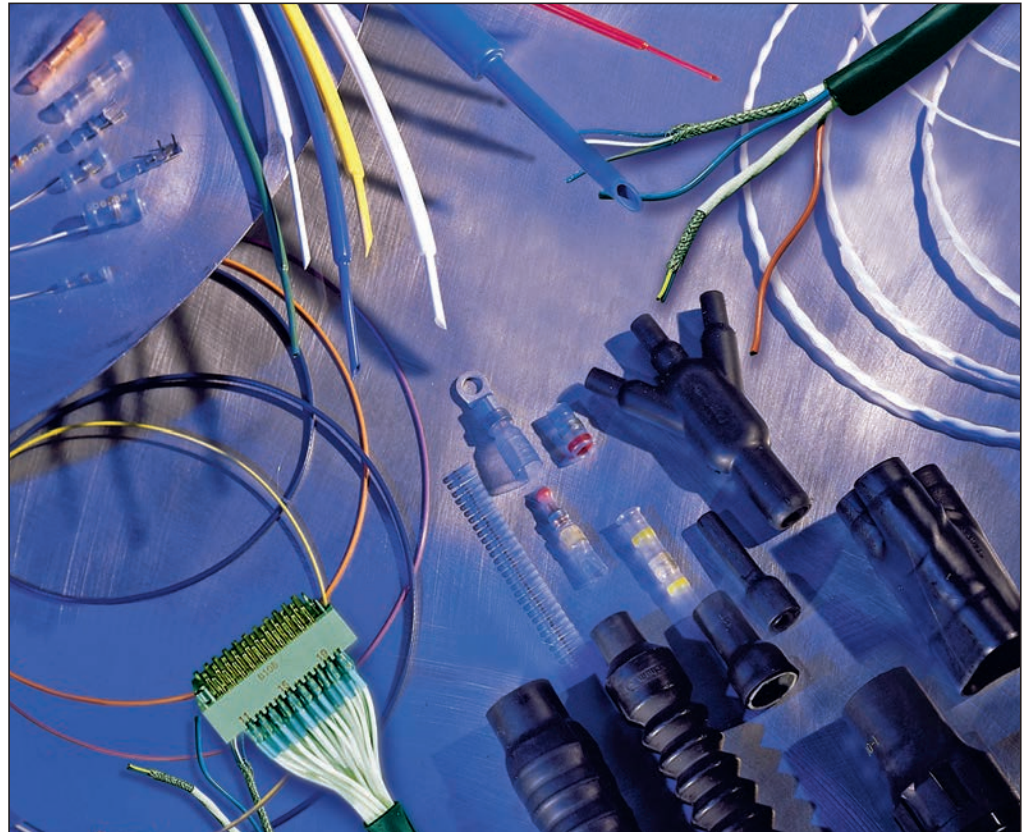

TE Connectivity (TE) is one of the world's leading companies in developing, supplying and manufacturing high quality, technologically advanced, heatshrink protection products. Our products provide a perfect solution for your toughest engineering problems.

TE's Raychem tubings are made from uniquely formulated materials that have been enhanced by radiation cross-linking, a technology that TE Automotive, under the brand of Raychem, famously pioneered.

These easy-to-use products provide cost effective, proven solutions in a wide range of automotive applications from sealing and protecting electrical splices to providing

mechanical protection for fluid management systems in harsh environments.

Our single wall tubings have a wide range of characteristics. Choose them wherever you need reliable insulation, strain relief, protection from mechanical abrasion and chemical abuse or an ideal way to identify or code components, or simply use them to enhance aesthetics.

Our adhesive-lined range shows its strength where sealing and encapsulation are critical requirements, as well as demonstrating many of the features of the single wall products. The inner adhesive can deliver a true seal against moisture and fluid ingress.

Product Facts

- Simple and fast installation supported by a wide range of TE Automotive application equipment.
- Available in a wide range of materials, such as polyolefins, fluoropolymers and elastomers.
- Choose from tubings that are highly flexible or semi-rigid, designed for operation in high or low temperature environments.
- Halogen-free and flame retardant to meet a range of industry standards.
- Available in many sizes, constructions, lengths and colours.
- Available with shrink ratios of 2:1 up to 7:1.

Core Technologies

**Core Technologies
of TE Connectivity
under the Raychem brand**

Since its founding in the 1950s, and at that time known as “Raychem” material science expertise has pioneered many of the breakthrough technologies used to create today’s most advanced environmental sealing and protection systems.

TE’s Raychem heat-shrink products are in service throughout the world in automotive, telecommunications, power distribution, aerospace, defence, industrial and commercial applications. Renowned for their unrivalled performance and reliability in the most demanding of environments, they include a comprehensive range of automotive sealing and protection products.

Produced using Raychem state-of-the-art manufacturing facilities and processes, these products offer very cost-effective and robust solution to all your inter-connection needs.

**Automotive Sealing and
Protection Products**

Raychem heat-shrinkable products from TE Connectivity have been developed to provide robust and reliable protection of automotive electronic components and electrical systems. Based on a broad range of cross-linked, shape-memory, polymeric materials, these products provide long-term protection against moisture ingress, corrosion, mechanical damage and extremes of temperature.

TE Connectivity’s experience of Raychem product design ensures a repeatable, reliable, shrink to fit installation, compatible with present day manufacturing processes. Adhesive precoatings on heat-shrinkable sleeveings and moulded shapes produce a positive watertight seal for wire-to-wire and wire-connector splices and terminations for both automotive and truck applications.

TE Connectivity’s Raychem brand of tubing was developed when our scientists pioneered the application of radiation cross-linking and the development of heat-shrinkable polymer products. Today, Raychem products from TE Connectivity are recognized worldwide for its expertise in these areas.

The Raychem brand of TE Connectivity tubings based on polyolefins, fluoropolymers and elastomers enhanced by radiation cross-linking and heat-shrinkability. When heated, the tubing shrinks to conform to almost any shape. Single wall tubings are available. Dual-wall tubings have an inner wall – either adhesive or an encapsulant – that melts and flows during installation heating to protect against environmental damage.

Heat-shrinkable products for the automotive industry may be used for a wide variety of applications including connector sealing, wire sealing and mechanical protection.

Core Technologies

Core Technologies

• **Polymer Formulation**

TE Connectivity’s Raychem formulations are blends of polymers and additives that are carefully designed to meet the stringent customer demands and international specification requirements.

The selection of polymers, flame-retardants, anti-oxidants, UV-stabilisers and other additives is of great importance for products to meet requirements on properties such as tensile strength, elongation at break, flame retardancy, continuous operating temperature, heat shock, heat ageing, flexibility, chemical and solvent resistance and shrink temperature.

A wide range of Raychem compounds by TE Connectivity are available to manufacture a complete range of heat-shrinkable products. Heat-shrinkable tubing, manufactured with these compounds, will meet international standards & OEM approvals in many electronics markets.

TE Connectivity’s Raychem hot melt adhesives are specially formulated to be compatible with individual heat-shrink tubing compounds. These adhesives include a balance of polymers and additives that allow the adhesive to melt, flow, seal and adhere to a range of substrates at the shrink temperature of the overall tubing.

• **Cross-Linking**

Radiation cross-linking was pioneered by TE Connectivity under the Raychem brand to enhance polymer properties and to provide heat-shrinkability or shape memory. Polymeric tubing is extruded and the chemical structure then modified in a separate process to provide improved properties such as reduced deformation under load (creep), improved chemical and solvent resistance, increased abrasion resistance, improved impact properties and shape memory characteristics.

Due to the three dimensional cross-links which are formed during the cross-linking process, the tubing does not melt and obtains its perfect shape memory.


• **Manufacturing Technology**

Based on many years of experience Raychem tubing by TE Connectivity is produced using optimised manufacturing processes by the following steps: compounding, extrusion, radiation cross-linking and expansion.


Firstly, compounding processes are used to mix selected polymers and additives. The resulting compounds are then extruded using optimised screw and die designs to produce homogeneous and consistent tubing. The tubing is then cross-linked using electron beam radiation.

In the expansion process the diameter of the tubing is increased by forces at high temperature.

Immediately after the tubing reaches its required expanded size, the tubing is cooled down and retains its expanded dimensions. This stage is called the “expanded” state.

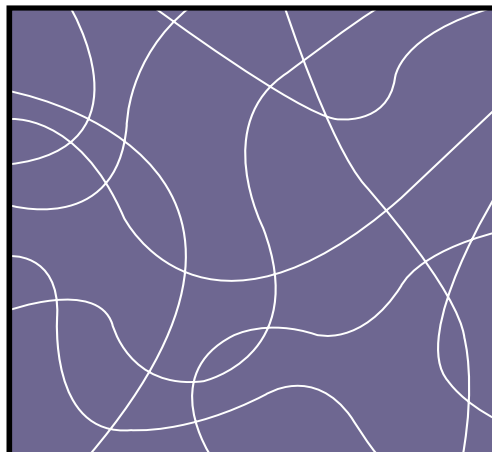

Unmodified Polymer

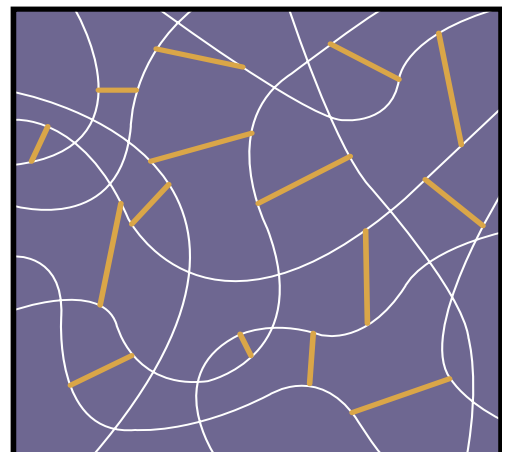


Cross-Linked Polymer


Core Technologies

What is Radiation Cross-Linking?


Uncross-linked polymer chains in insulation immediately after extrusion:
Long chain molecules are free to slide over each other – polymer can be melted.

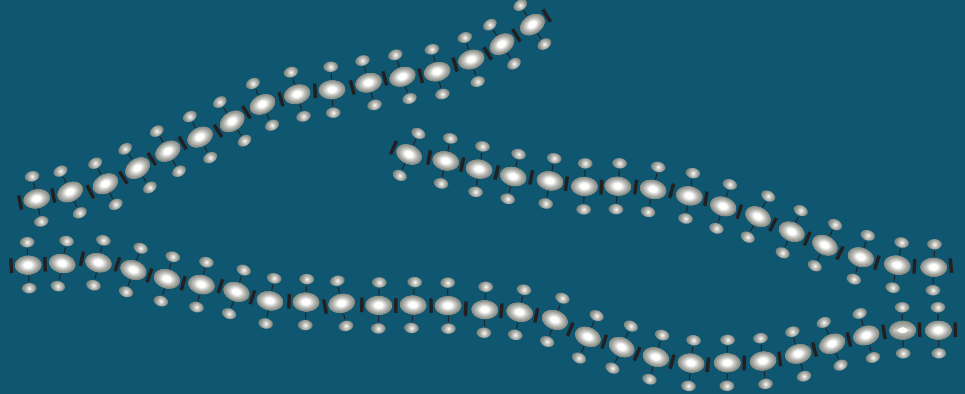

To cross-link the insulation, high energy electrons are fired at it in a special chamber:

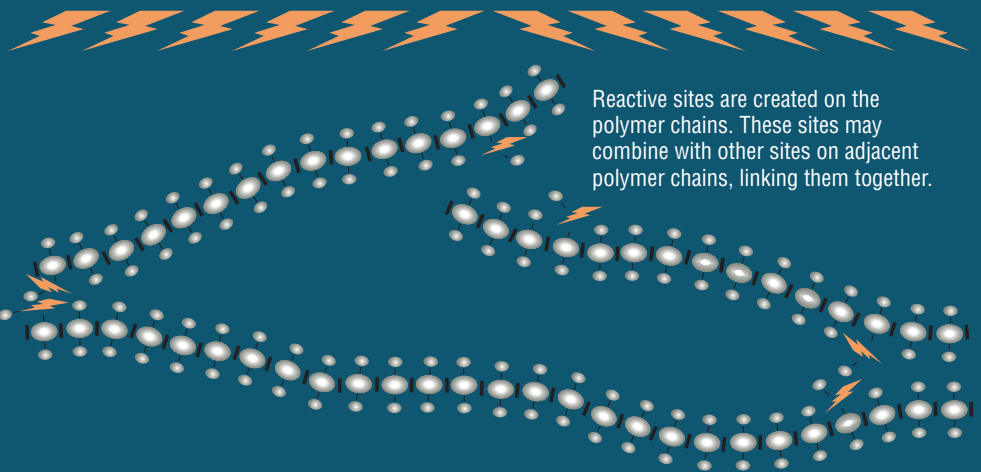

The resulting structure is a network of linked molecules:
This acts as a single giant molecule. Because the chains are no longer free to move over one another, the cross-linked molecules will not melt.

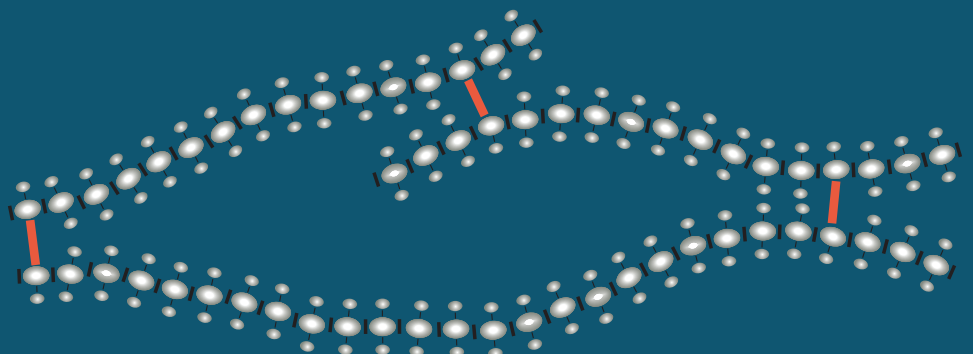

Harness Design

- Sealing and Protection for Wire Bundles, Connectors, Terminals and Splices
- Splice Sealing
- Connector Sealing
- Wire Bundle Sealing
- Feed-Throughs




Protection for Wire Bundles, Connectors, Terminals and Splices



CRN Tubing

Low cost forming for power cables.

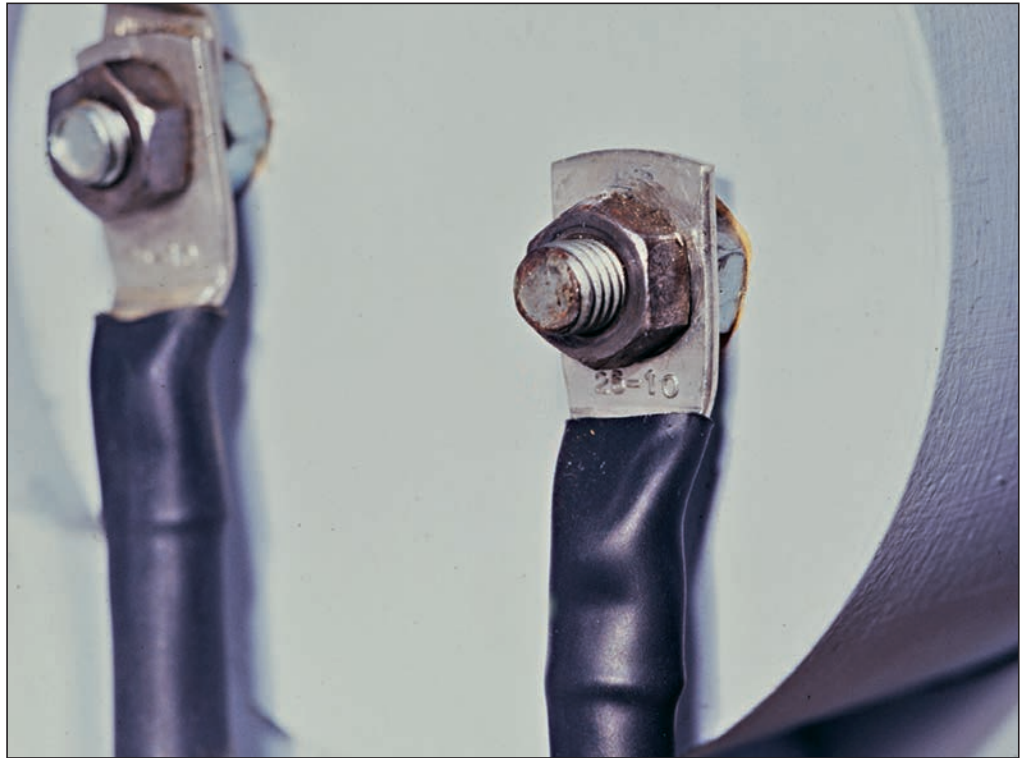

CRN Tubing

semi-rigid, flame retarded, polyolefin based heat-shrinkable tubing displays excellent resistance to a wide range of chemicals and solvents combined with excellent electrical properties.

The tubing is tough and semi-rigid which makes it ideally suitable for applications requiring strain relief or abrasion resistance.

Widely used through-out industry for component protection and strain relief of sensitive areas such as solder and crimp joints.

Benefits


- Excellent abrasion resistance
- Good strain relief performance
- Outstanding physical and electrical performance
- Excellent chemical and solvent resistance
- Versatile process – can be carried out both on and off-board
- RoHS/ELV compliant

A Semi-Rigid, Flame-Retarded Polyolefin Heat-Shrinkable Tubing

Product Features

CRN Tubing

- Continuous operating temperature from -55°C up to $+135^{\circ}\text{C}$ (3000 hrs)
- Minimum shrink temperature: 110°C
- Minimum full recovery temperature: 135°C
- Flame retarded
- 2:1 shrink ratio

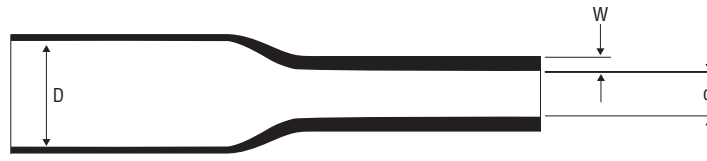

Product Dimensions

| Size | Inside Diameter | | Wall Thickness | Ordering Description |
|------|---------------------------------|------------------------------------|------------------------------------|----------------------|
| | D (min) Expanded as Supplied mm | d (max) Recovered after Heating mm | W (nom) Recovered after Heating mm | |
| 3/64 | 1.2 | 0.6 | 0.51 | CRN-3/64-colour code |
| 1/16 | 1.6 | 0.8 | 0.51 | CRN-1/16-colour code |
| 3/32 | 2.4 | 1.2 | 0.51 | CRN-3/32-colour code |
| 1/8 | 3.2 | 1.6 | 0.51 | CRN-1/8-colour code |
| 3/16 | 4.8 | 2.4 | 0.64 | CRN-3/16-colour code |
| 1/4 | 6.4 | 3.2 | 0.64 | CRN-1/4-colour code |
| 3/8 | 9.5 | 4.8 | 0.76 | CRN-3/8-colour code |
| 1/2 | 12.7 | 6.4 | 0.76 | CRN-1/2-colour code |
| 3/4 | 19.1 | 9.5 | 0.89 | CRN-3/4-colour code |



Other lengths, colours and sizes are available subject to special order.



Ordering Information

Standard Colour Black (0)

Size Selection Always order the largest size that will shrink snugly over the component to be covered. Special order sizes are available upon request.

Ordering Description Specify product name, size and colour (for example CRN-1/8-0)

| Specifications/Approvals | Series | UL  | CSA  | TE |
|--------------------------|-----------|----------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|--------------------------|
| | CRN-black | E35586 600 V, 125°C | LR31929 600 V, 125°C | RT-360 Type 1 RK-6003 |



Sealing and Protection for Wire Bundles, Connectors, Terminals and Splices



ES Caps

ES Caps are specially designed to provide mechanical and environmental protection of stub splices in electrical harnesses. Clear caps allow see-through inspection; black caps are flame-retarded.



ES Caps

Heat-shrinkable one-piece caps with a thick adhesive liner which provide complete environmental and moisture sealing for stub splices.

The cap, with a pre-crimped end, is placed over the splice and when it is heated the adhesive melts and is squeezed around and between the crimped or welded wires by the shrinking action of the tube.

The tough high density jackets also provide electrical insulation, excellent mechanical cut-through and abrasion protection as well as effective strain relief for the splice.

Benefits

- 4:1 shrink ratio allows a few sizes to cover a wide range of splice and component diameters.
- Mechanically tough jacket provides strain relief and abrasion protection.
- Thick adhesive liner forms an effective barrier against fluids and moisture and performs well at an extended temperature range.
- RoHS/ELV compliant

High-Shrink-Ratio, Adhesive-Lined Semirigid Polyolefin Caps

Product Features

ES Caps


- Continuous operating temperatures from -40°C up to +125°C* (3000 hrs) (*with tape to help secure cap)
- Minimum shrink temperature: 100°C
- Minimum full recovery temperature: 135°C
- Flame retarded (black only)
- Black and clear cap options
- 2:1 shrink ratio


Product Dimensions

| Inside diameter (including Core) | | | | Recovered Wall Thickness** | | |
|----------------------------------|---------------------------------|------------------------------------|-----------------------------|------------------------------------|--------------------------------------|----------------------|
| Standard Length* as Supplied mm | Maximum Expanded as Supplied mm | Maximum Recovered after Heating mm | Total Wall after Heating mm | Total Jacket Wall after Heating mm | Total Adhesive Wall after Heating mm | Ordering Description |
| 30.35 | 5.72 | 1.27 | 1.20 | 0.64 | 0.56 | ES-Cap-NO. 1 |
| 30.35 | 7.44 | 1.65 | 1.52 | 0.76 | 0.76 | ES-Cap-NO. 2 |
| 40.50 | 10.85 | 2.41 | 1.91 | 0.89 | 1.37 | ES-Cap-NO. 3 |


*) Other cap lengths available upon request.
**) The wall thickness of the tubing will be less than specified if recovery is restricted during shrinkage.

Ordering Information


| | | |
|---------------------------------|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| Standard Colours | Black (0) | Clear (X) |
| Size Selection | Always order the largest size that will shrink snugly over the component to be covered. | |
| Standard Packaging | Cut pieces | |
| Marking | Caps will be marked with the number sizes (for example ES-1, ES-2, or ES-3). | |
| Ordering Description | Specify product name, size and colour (for example ES-CAP-NO. 1) | |
| Specifications/Approvals | Series | UL  |
| | ES-CAP | E85381, 600 V, 125°C |
| | | TE |
| | | RW-3006 |



Operating Temperature Range



Shrinking Ratio



Shrink Temperature



Flame Retarded (black only)



Fluid Resistant




Underwriters Laboratories

Protection for Wire Bundles, Connectors, Terminals



FRAG Tubing

Flexible, chemical and abrasion resistant tubing.

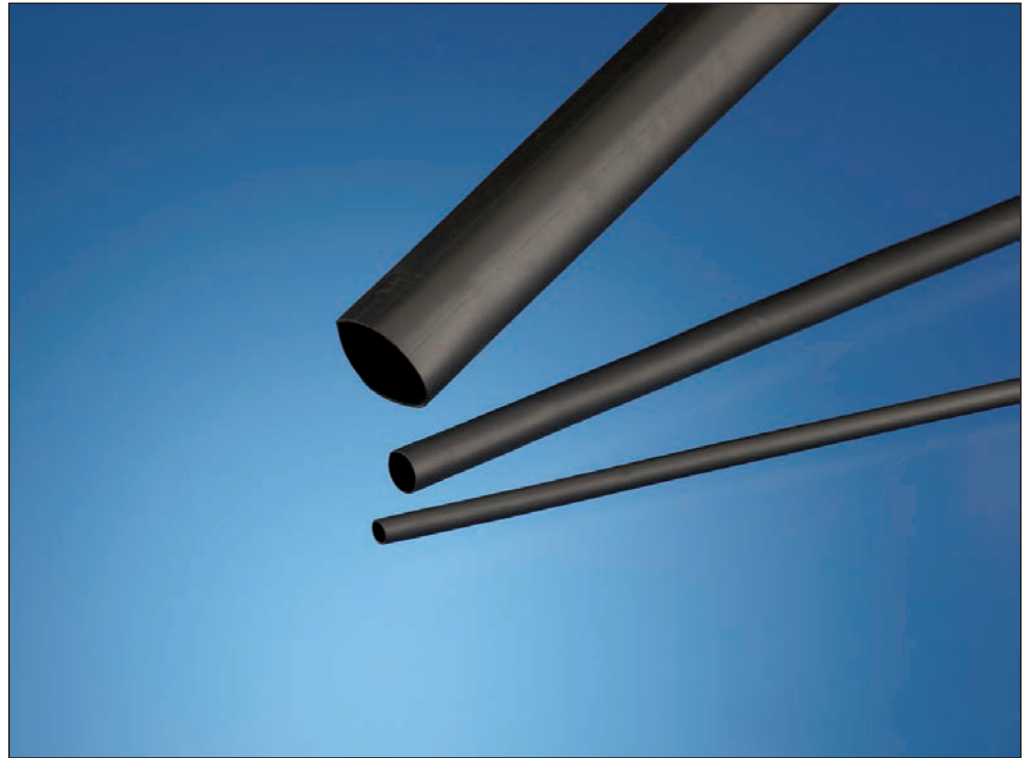

FRAG Tubing

Specially formulated for optimum high-temperature fluid resistance, and long term heat resistance. Resistant to diesel fuels, hydraulic fluids and lubricating oils. It is also well suited for the demands of motorsport cable harnesses.

Benefits


- FRAG is a heat-shrinkable, thick-wall tubing designed for harsh environments. It has excellent resistance to fluids at elevated temperatures and good long term heat resistance.
- FRAG is flexible as well as abrasion resistant. These properties make it ideal for the protection of electrical cables or similar components.
- RoHS/ELV compliant

Heat-Shrinkable, Flexible, Thick-Wall Tubing

Product Features

FRAG Tubing

- Continuous operating temperature from -75°C up to +150°C
- Minimum shrink temperature: 150°C
- Minimum full recovery temperature: 175°C
- Flame retarded
- 2:1 shrink ratio

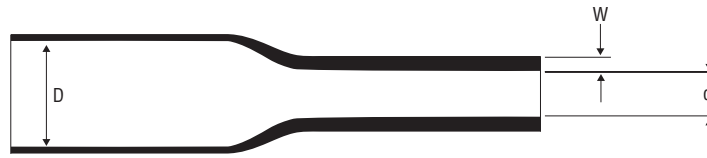



Product Dimensions

| Size | Inside Diameter | | Wall Thickness | | Ordering Description |
|-----------|---------------------------------|------------------------------------|------------------------------------|--|----------------------|
| | D (min) Expanded as Supplied mm | d (max) Recovered after Heating mm | W (nom) Recovered after Heating mm | | |
| 3.2/1.6 | 3.2 | 1.6 | 0.80 | | FRAG-3.2/1.6-0 |
| 4.8/2.4 | 4.8 | 2.4 | 0.80 | | FRAG-4.8/2.4-0 |
| 6.0/3.5 | 6.0 | 3.5 | 0.90 | | FRAG-6.0/3.5-0 |
| 9.0/5.0 | 9.0 | 5.0 | 1.00 | | FRAG-9.0/5.0-0 |
| 12.0/7.0 | 12.0 | 7.0 | 1.25 | | FRAG-12.0/7.0-0 |
| 18.0/10.0 | 18.0 | 10.0 | 1.45 | | FRAG-18.0/10.0-0 |
| 25.0/13.0 | 25.0 | 13.0 | 1.80 | | FRAG-25.0/13.0-0 |
| 38.0/19.0 | 38.0 | 19.0 | 2.40 | | FRAG-38.0/19.0-0 |
| 51.0/25.0 | 51.0 | 25.0 | 2.80 | | FRAG-51.0/25.0-0 |
| 76.0/38.0 | 76.0 | 38.0 | 3.20 | | FRAG-76/38-0 |

The largest size that will recover snugly over the component to be covered should be ordered. The wall thickness of the tubing will be less than specified if recovery is restricted during shrinkage. Other lengths and sizes are available subject to special order.

Ordering Information

| Standard Colour | Black (0) | | | | |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|--------|----|------|---------|
| Size Selection | Always order the largest size that will shrink snugly over the component to be covered. Special order sizes are available upon request. | | | | |
| Ordering Description | Specify product name, size and colour (for example FRAG-3.2/1.6-0) | | | | |
| Specifications/Approvals | <table border="1"> <thead> <tr> <th>Series</th> <th>TE</th> </tr> </thead> <tbody> <tr> <td>FRAG</td> <td>RK-6176</td> </tr> </tbody> </table> | Series | TE | FRAG | RK-6176 |
| Series | TE | | | | |
| FRAG | RK-6176 | | | | |



Sealing and Protection for Wire Bundles, Connectors, Terminals and Splices



HTAT Tubing

Semi-flexible, dual wall and moisture resistant heat-shrinkable sealing.



HTAT Tubing

Semi-flexible, heat-shrinkable tubing with an integrally bonded melttable adhesive inner lining designed to provide moisture proof encapsulation for a range of substrates at elevated temperatures.

Manufactured from radiation cross-linked polyolefins, the inner wall melts when heated and is forced into interstices by the shrinking of the outer wall, so that when cooled, the substrate is encapsulated by a tough, protective, moisture proof barrier.

An operating temperature range from -55°C up to $+125^{\circ}\text{C}$ and a high shrink ratio as standard, means that the tubing offers superior environmental protection to a wide range of irregular shapes with varying dimensions. The jacket is flame retarded to reduce flame propagation.

Benefits


- Low profile mechanical protection, strain relief and sealing
- Seals a wide range of different number/gauge sizes of wires into the same connector housing
- Easy installation – using simple heat shrink process equipment
- Semi-flexible, dual-wall moisture proof, heat-shrinkable tubing
- Environmental sealing
- High strength bonding
- Ideal for connector sealing covering large diameter differences
- Shrink ratio 4:1
- Can be used in conjunction with adhesive profiles
- RoHS/ELV compliant

Semi-Flexible, Dual-Wall Moisture Proof, Heat-Shrinkable Tubing

Product Features

HTAT Tubing

- Continuous operating temperature from -55°C up to +125°C
- Minimum shrink temperature: 80°C
- Minimum full recovery temperature: 110°C
- Flame retarded
- 4:1 shrink ratio

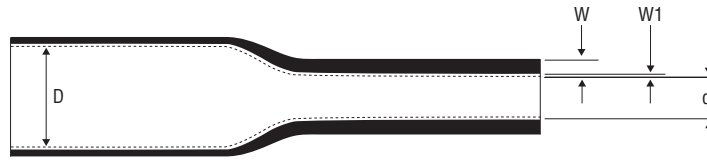


Product Dimensions

| Size | Inside Diameter | | Wall Thickness | | Ordering Description |
|-------|---------------------------------|------------------------------------|------------------------------------|----------------------------------------------------|----------------------|
| | D (min) Expanded as Supplied mm | d (max) Recovered after Heating mm | W (nom) Recovered after Heating mm | W1 (nom) Melttable Wall Recovered after Heating mm | |
| 4/1 | 4.0 | 1.0 | 1.00 | 0.40 | HTAT-4/1-0 |
| 8/2 | 8.0 | 2.0 | 1.00 | 0.50 | HTAT-8/2-0 |
| 12/3 | 12.0 | 3.0 | 1.40 | 0.60 | HTAT-12/3-0 |
| 16/4 | 16.0 | 4.0 | 1.75 | 0.75 | HTAT-16/4-0 |
| 24/6 | 24.0 | 6.0 | 2.25 | 0.80 | HTAT-24/6-0 |
| 32/8 | 32.0 | 8.0 | 2.50 | 1.00 | HTAT-32/8-0 |
| 48/13 | 48.0 | 13.0 | 2.54 | 1.00 | HTAT-48/13-0 |


The largest size that will recover snugly over the component to be covered should be ordered. The wall thickness of the tubing will be less than specified if recovery is restricted during shrinkage. Other lengths, colours (colour codes by size) and sizes are available subject to special order.

Ordering Information

| Standard Colour | Black (0) | | | | |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|--------|----|-------------|---------|
| Size Selection | Always order the largest size that will shrink snugly over the component to be covered. Special order sizes are available upon request. | | | | |
| Ordering Description | Specify product name, size and colour (for example HTAT-12/3-colour) | | | | |
| Specifications/Approvals | <table border="1"> <thead> <tr> <th>Series</th> <th>TE</th> </tr> </thead> <tbody> <tr> <td>HTAT Tubing</td> <td>RW-2052</td> </tr> </tbody> </table> | Series | TE | HTAT Tubing | RW-2052 |
| Series | TE | | | | |
| HTAT Tubing | RW-2052 | | | | |



Operating Temperature Range



Shrinking Ratio



Shrink Temperature



Flame Retarded



Fluid Resistant

Protection for Wire Bundles, Connectors, Terminals and Splices



LSTT Tubing

Low shrink temperature polyolefin heat-shrinkable tubing.



LSTT Tubing

Highly flexible, low shrink temperature heat-shrinkable tubing. Easy to handle and install, its low shrink temperature offers exceptionally fast recovery for maximum efficiency in high volume commercial applications and makes it suitable for use on or near delicate temperature sensitive materials e.g. PVC (80 °C) jacketed wire and cable.

The material contains no added halogens. Although not flame retarded, LSTT meets the automotive flame propagation standard MVSS 302.

LSTT gives good physical and electrical performance.

Typical applications are electrical termination insulation, colour coding, covering of heat sensitive devices, cosmetic coverings and mechanical protection.

Benefits


- Rapid recovery at low temperatures
- Can be used with temperature sensitive materials
- Excellent physical and electrical performance
- Flexible
- RoHS/ELV compliant

Low Shrink Temperature Polyolefin Heat-Shrinkable Tubing

Product Features

LSTT Tubing

- Continuous operating temperature from -40°C up to +125°C
- Minimum shrink temperature: 65°C
- Minimum full recovery temperature: 110°C
- 2:1 shrink ratio

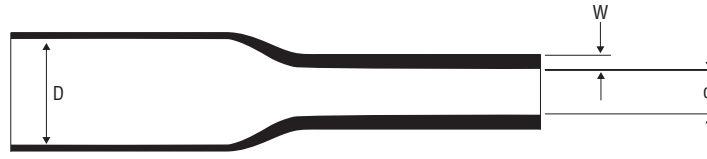


Product Dimensions


| Size | Inside Diameter | | Wall Thickness | | Ordering Description |
|------|---------------------------------|------------------------------------|------------------------------------|--|---------------------------------|
| | D (min) Expanded as Supplied mm | d (max) Recovered after Heating mm | W (nom) Recovered after Heating mm | | |
| 1.6 | 1.6 | 0.8 | 0.50 | | LSTT-1.6-colour code |
| 2.4 | 2.4 | 1.2 | 0.55 | | LSTT-2.4-colour code |
| 3.2 | 3.2 | 1.6 | 0.55 | | LSTT-3.2-colour code |
| 4.8 | 4.8 | 2.4 | 0.55 | | LSTT-4.8-colour code |
| 6.4 | 6.4 | 3.2 | 0.65 | | LSTT-6.4-colour code |
| 9.5 | 9.5 | 4.8 | 0.65 | | LSTT-9.5-colour code |
| 12.7 | 12.7 | 6.4 | 0.65 | | LSTT-12.7-colour code |
| 19.0 | 19.0 | 9.5 | 0.80 | | LSTT-19-colour code |
| 25.4 | 25.4 | 12.7 | 0.95 | | LSTT-25.4-colour code |
| 32.0 | 32.0 | 16.0 | 1.05 | | LSTT-32-colour code |
| 38.0 | 38.0 | 19.0 | 1.05 | | LSTT-38-colour code |
| 52.0 | 52.0 | 26.0 | 1.14 | | LSTT-52-available in black only |

Ordering Information

| | | | | |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|-----------|------------|----------|
| Standard Colours | Black (0) | Red (2) | Yellow (4) | Blue (6) |
| Size Selection | Always order the largest size that will shrink snugly over the component to be covered. Special order sizes are available upon request. | | | |
| Ordering Description | Specify product name, size and colour (for example LSTT-32-colour) | | | |
| Specifications/Approvals | Series | TE | | |
| | LSTT Tubing | RW-2051 | | |



Operating Temperature Range



Shrinking Ratio



Shrink Temperature

Sealing and Protection for Wire Bundles, Connectors, Terminals and Splices



QSZH-125 Tubing
Sealing and protection of inline wire splices and grounding ring terminals.



QSZH-125 Tubing

Zero halogen, dual wall heat-shrinkable tubing designed to provide environmental sealing, mechanical and electrical protection of in-line splices in an automotive environment.

The tubing is centred over the splice area and on heating the adhesive melts and is squeezed around where the wires are crimped or welded and between wire cores by the shrinking action of the sleeve. The installed QSZH-125 tube provides low profile mechanical protection against flexing, abrasion and cut-through as well as electrical insulation.

There are five QSZH-125 sizes to cover a wide range of typical automotive splice configurations having a maximum of seven wires on either side.

The sleeves are marked 1, 2, 3, 3A and 4 to denote the size.

Benefits


- Excellent Environmental Sealing (2×10^8 Ohms minimum after 24 hrs immersion in 5% NaCl)
- Quick installation
- Zero Halogen
- Inspectable after installation
- Mechanical Protection against flexing, abrasion and cut-through
- Applications versatility – one tubing size covers a broad range of ground wire sizes and wire combinations
- Small cross-sectional profile
- Temperature rated to 125°C
- RoHS/ELV compliant

Dual-Wall, Moisture Proof, Heat-Shrinkable Tubing to Protect Electrical Splices

Product Features

QSZH-125 Tubing

- Continuous operating temperatures from -40°C up to $+125^{\circ}\text{C}$ (3000 hrs)
- 4:1 shrink ratio

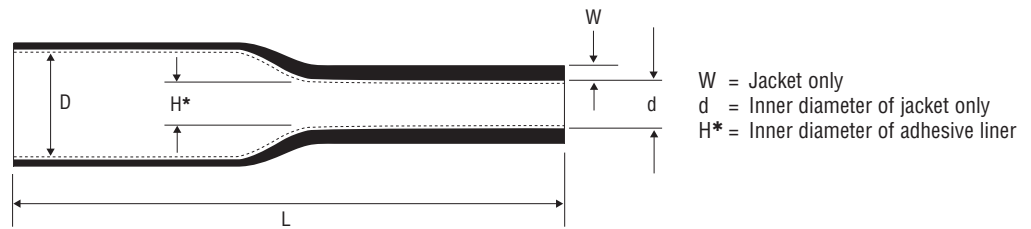

Product Dimensions

| Size | Inside Diameter | | | Wall Thickness (mm) | | Length** L (nom) | Ordering Description |
|------|------------------------------|----------------------------------|----------------------------------------|----------------------------------------|--------------------------|---------------------|----------------------|
| | D (min) Expanded as Supplied | H (max)* Recovered after Heating | d (max) Recovered Jacket after Heating | W (min) Recovered Jacket after Heating | W + Adhesive Liner (min) | | |
| NR1 | 5.75 | 1.25 | 2.65 | 0.6 | 1.15 | 50 | QSZH-125-NR1 |
| NR2 | 7.50 | 1.65 | 3.45 | 0.7 | 1.4 | 50 | QSZH-125-NR2 |
| NR3 | 11.00 | 2.40 | 4.65 | 0.8 | 1.8 | 65 | QSZH-125-NR3 |
| NR3A | 14.00 | 3.00 | 5.90 | 0.9 | 2.15 | 65 | QSZH-125-NR3A |
| NR4 | 18.30 | 4.35 | 7.40 | 0.9 | 2.2 | 75 | QSZH-125-NR4 |


Refer to the Installation Guidelines document before selecting size (PIP-101).
The wall thickness of the tubing will be less than specified if recovery is restricted during shrinkage.

*) Nominal values for reference only.

***) Other lengths are available subject to special order.

Ordering Information

| | | |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| Standard Colour | Jacket | Adhesive |
| | Clear | Black |
| Installation | The product may be installed using a TE Automotive RBK-ILS Processor or other recommended application equipment. Consult your local TE Automotive office for more information. | |
| Size Selection | Refer to PIP-101 | |
| Ordering Description | Specify product name, size and colour (for example QSZH-125-NR) | |
| Specifications/Approvals | Series QSZH-125 Tubing | TE RK-6771 |



Operating Temperature Range



Shrinking Ratio



Shrink Temperature



Fluid Resistant

Sealing and Protection for Wire Bundles, Connectors, Terminals and Splices



RayBlock 85 Sealing Kit
Easy-to-install grommet and wire bundle sealing for up to 20 wires.



RayBlock 85 Sealing Kit

Designed to provide consistent sealing for cable bundles and the back of connectors. The wires in the bundle are placed within the channels of a specially formulated hot-melt adhesive profile, and then covered by dual wall, heat-shrinkable tubing with a flame-retardant radiation-crosslinked outer wall and hot-melt-adhesive inner wall.

When the tubing is heated, the hot-melt adhesive melts and the tubing shrinks, forcing the molten adhesive to fill all the voids within the wire bundle and tubing. The result is a solid plug of adhesive molded around each wire in the bundle, creating a moisture-resistant seal.

Benefits


- Excellent resistance to all common solvents and acids
- Outstanding vibration resistance
- Excellent electrical insulation
- RoHS/ELV compliant

Heat-Shrinkable Water Blocking Systems for Cable Bundles and Multi-Wire Electrical Connectors

Product Features

RayBlock 85 Sealing Kit

- Continuous operating temperature from -40°C up to +85°C
- Minimum shrink temperature: 80°C
- Minimum full recovery temperature: 110°C
- Flame retarded (ATUM tubing only)
- 4:1 shrink ratio

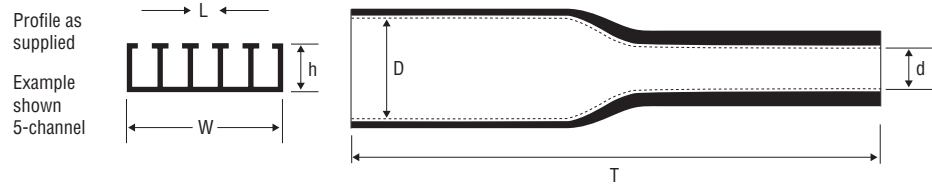

Product Dimensions



| Number of Channels | Profile | | | Tubing | | | Ordering Description |
|--------------------|---------------------------|-------------------|------------------|---------------------------------|------------------------------------|------------|----------------------|
| | h Outside height (nom) mm | L Length (nom) mm | W Width (nom) mm | D (min) Expanded as Supplied mm | d (max) Recovered after Heating mm | T (nom) mm | |
| 2 | 8.5 | 2.75 | 8.50 | 12.00 | 3.00 | 34.00 | RBK-85 Kit 0102-AX |
| 3 | 8.5 | 2.75 | 12.25 | 16.00 | 4.00 | 33.00 | RBK-85 Kit 0103-AX |
| 4 | 8.5 | 2.75 | 16.00 | 16.00 | 4.00 | 44.00 | RBK-85 Kit 0104-AX |
| 5 | 8.5 | 2.75 | 21.00 | 24.00 | 6.00 | 34.00 | RBK-85 Kit 0105-AX |
| 5 | 8.5 | 2.75 | 21.00 | 24.00 | 6.00 | 23.00 | RBK-85 Kit 0305-AX |
| 7 | 8.5 | 2.75 | 27.25 | 24.00 | 6.00 | 65.00 | RBK-85 Kit 0107-AO |
| 7 | 8.5 | 2.75 | 27.25 | 24.00 | 6.00 | 23.00 | RBK-85 Kit 0607-AX |
| 8 | 8.5 | 2.75 | 31.00 | 24.00 | 6.00 | 47.00 | RBK-85 Kit 0208-AX |
| 10 | 8.5 | 2.75 | 38.50 | 32.00 | 8.00 | 55.00 | RBK-85 Kit 0510-AO |

The selection table is intended for guidance only and individual bundles may well differ in requirement. Special designs may be possible on request to cater for large wires or larger cable bundles. Please contact TE Automotive for further information.

TE Automotive offers a variety of heating tools for the installation of RayBlock 85. The range includes hot-air blowers, infra-red heaters and special automatic heating devices.

Ordering Information

| | | |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| Standard Colours | Black (0) | Clear (X) |
| Size Selection | Maximum two wires per channel, for wires with maximum outside diameter 2.8 mm. For wires with an outside diameter greater than 2.8 mm, please consult TE Automotive. Standard Packaging: 1000 pcs of profile plus 1000 pcs of tubing per box. | |
| Ordering Description | Specify product name, size and colour (for example RBK-85-Kit-0102-AX) | |
| Specifications/Approvals | Series | TE |
| | RayBlock 85 Sealing Kit | RW-2101 |



Sealing and Protection for Wire Bundles, Connectors, Terminals and Splices



RayBlock 105 Sealing Kit
Easy-to-install grommet and wire bundle sealing for up to 20 wires.



RayBlock 105 Sealing Kit

Designed to provide consistent sealing for cable bundles and the back of connectors. The wires in the bundle are placed within the channels of a specially formulated hot-melt adhesive profile, and then covered by dual wall, heat-shrinkable tubing with a flame-retardant radiation-crosslinked outer wall and hot-melt-adhesive inner wall.

When the tubing is heated, the hot-melt adhesive melts and the tubing shrinks, forcing the molten adhesive to fill all the voids within the wire bundle and tubing. The result is a solid plug of adhesive molded around each wire in the bundle, creating a moisture-resistant seal.

Benefits


- Excellent resistance to all common solvents and acids
- Outstanding vibration resistance
- Excellent electrical insulation
- RoHS/ELV compliant

Heat-Shrinkable Water Blocking Systems for Cable Bundles and Multi-Wire Electrical Connectors

Product Features

RayBlock 105 Sealing Kit

- Continuous operating temperature from -40°C up to +105°C
- Minimum shrink temperature: 80°C
- Minimum full recovery temperature: 110°C
- Flame retarded
- 4:1 shrink ratio

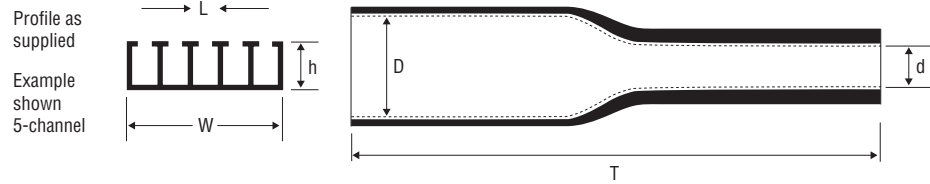

Product Dimensions


| Profile | Tubing | | | | | | Ordering Description |
|---------|--------------------|---------------------------|-------------------|------------------|---------------------------------|------------------------------------|----------------------|
| | Number of Channels | h Outside height (nom) mm | L Length (nom) mm | W Width (nom) mm | D (min) Expanded as Supplied mm | d (max) Recovered after Heating mm | |
| 2 | 8.5 | 2.75 | 8.50 | 12.00 | 3.00 | 55.00 | RBK-105 Kit 0702-A0 |
| 2 | 8.5 | 2.75 | 8.50 | 19.00 | 4.00 | 50.00 | RBK-105 Kit 1102-A0 |
| 3 | 8.5 | 2.75 | 12.25 | 16.00 | 4.00 | 40.00 | RBK-105 Kit 0103-A0 |
| 3 | 8.5 | 2.75 | 12.25 | 16.00 | 4.00 | 50.00 | RBK-105 Kit 1003-A0 |
| 4 | 8.5 | 2.75 | 16.00 | 16.00 | 4.00 | 33.00 | RBK-105 Kit 0204-A0 |
| 5 | 8.5 | 2.75 | 19.75 | 24.00 | 6.00 | 45.00 | RBK-105 Kit 0105-A0 |
| 7 | 8.5 | 2.75 | 27.25 | 24.00 | 6.00 | 65.00 | RBK-105 Kit 0107-A0 |
| 8 | 8.5 | 2.75 | 31.00 | 24.00 | 6.00 | 47.00 | RBK-105 Kit 0508-A0 |
| 10 | 8.5 | 2.75 | 38.50 | 32.00 | 8.00 | 65.00 | RBK-105 Kit 0110-A0 |
| 10/7 | 8.5 | 2.75 | 38.50/28.60 | 32.00 | 8.00 | 60.00 | RBK-105 Kit 0510-A0 |

The selection table is intended for guidance only and individual bundles may well differ in requirement. Special designs may be possible on request to cater for large wires or larger cable bundles. Please contact TE Automotive for further information.


TE Automotive offers a variety of heating tools for the installation of RayBlock 105 Sealing Kit. The range includes hot-air blowers, infra-red heaters and special automatic heating devices.

Ordering Information

| Standard Colour | Black (0) | | | | |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|----|--------------------------|---------|
| Size Selection | Maximum two wires per channel, for wires with maximum outside diameter 2.8 mm. For wires with an outside diameter greater than 2.8 mm, please consult TE Automotive. Standard Packaging: 1000 pcs of profile plus 1000 pcs of tubing per box. | | | | |
| Ordering Description | Specify product name, size and colour (for example RBK-105-Kit-0103-A0) | | | | |
| Specifications/Approvals | <table border="1"> <thead> <tr> <th>Series</th> <th>TE</th> </tr> </thead> <tbody> <tr> <td>RayBlock 105 Sealing Kit</td> <td>RW-2102</td> </tr> </tbody> </table> | Series | TE | RayBlock 105 Sealing Kit | RW-2102 |
| Series | TE | | | | |
| RayBlock 105 Sealing Kit | RW-2102 | | | | |



Operating Temperature Range



Shrinking Ratio



Shrink Temperature



Flame Retarded



Fluid Resistant

Sealing and Protection for Wire Bundles, Connectors, Terminals and Splices



**RBK-ILS-125/
RBK-ILS-125-NR500
Tubing**

Sealing and protection of inline wire splices and grounding ring terminals.



RBK-ILS-125 Tubing

Dual-wall, heat-shrinkable tubing designed to provide moisture proof encapsulation of an electrical splice in an automotive environment. Moisture may enter a splice area directly or indirectly via a capillary action between individual wires, thus causing corrosion.

The tubing is centered over the splice area and on heating the adhesive melts and is squeezed around where the wires are crimped or welded and between the conductors, by the shrinking action of the sleeve. The installed product provides low profile mechanical protection against flexing, abrasion and cut-through as well as electrical insulation. The jacket is flame-retarded.

There are five sizes to cover the range of splice profiles found, and up to seven wires may enter either end of the product. The sleeves are marked with size, eg. RBK-1 to aid selection. The compact size of RBK-ILS-125 suits process line harness assembly.

RBK-ILS-125-NR500 Tubing

Highly over-expanded product which allows the product to be positioned and installed after the ring terminal has been crimped or ultrasonically welded to the ground wires.

Benefits

- Excellent environmental seal
- Mechanical protection against flexing, abrasion and cut-through
- Small cross-sectional profile
- Simultaneous sealing, protection and insulation – in one process pass
- Rapid, simple installation – over-expanded sizes allow placement of tubing over ring terminal after ground wires have been terminated
- Applications versatility – one tubing size covers a broad range of ground wire sizes and wire combinations
- Superior strain relief and mechanical protection – provided by tough outer jacket, plus tubing and adhesive combination
- Established application and installation procedures – meeting most harness production processes
- RoHS/ELV compliant

Dual-Wall, Moisture Proof, Heat-Shrinkable Tubing to Protect Electrical Splices


Product Features

RBK-ILS-125 Tubing

- Continuous operating temperature from -40°C up to +125°C (3000 hrs)
- Flame retarded
- 4:1 shrink ratio

RBK-ILS-125-NR500 Tubing

- 5:1 expansion ratio, allowing installation over terminal

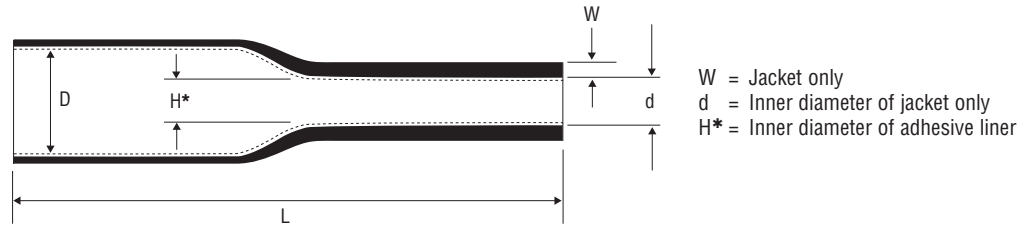

Product Dimensions

| Size | Inside Diameter | | | Wall Thickness (mm) | | Length** L (nom) | Ordering Description |
|------|------------------------------|----------------------------------|----------------------------------------|----------------------------------------|--------------------------|---------------------|----------------------|
| | D (min) Expanded as Supplied | H (max)* Recovered after Heating | d (max) Recovered Jacket after Heating | W (min) Recovered Jacket after Heating | W + Adhesive Liner (min) | | |
| NR1 | 5.75 | 1.25 | 2.65 | 0.6 | 1.15 | 50 | RBK-ILS-125-NR1 |
| NR2 | 7.50 | 1.65 | 3.45 | 0.7 | 1.4 | 50 | RBK-ILS-125-NR2 |
| NR3 | 11.00 | 2.40 | 4.65 | 0.8 | 1.8 | 65 | RBK-ILS-125-NR3 |
| NR3A | 14.00 | 3.00 | 5.90 | 0.9 | 2.15 | 65 | RBK-ILS-125-NR3A |
| NR4 | 18.30 | 4.35 | 7.40 | 0.9 | 2.2 | 75 | RBK-ILS-125-NR4 |


Refer to the Installation Guidelines document before selecting size (PIP-019).
The wall thickness of the tubing will be less than specified if recovery is restricted during shrinkage.

*) Nominal values for reference only.


***) Other lengths are available subject to special order.

Ordering Information

| Standard Colour | Black (0) | | | | |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|----|-------------|---------|
| Installation | The product may be installed using a TE Automotive RBK-ILS Processor or other recommended application equipment. Consult your local TE Automotive office for more information. | | | | |
| Size Selection | Refer to PIP-019 | | | | |
| Ordering Description | Specify product name, size and colour (for example RBK-ILS-125-NR) | | | | |
| Specifications/Approvals | <table border="1"> <thead> <tr> <th>Series</th> <th>TE</th> </tr> </thead> <tbody> <tr> <td>RBK-ILS-125</td> <td>RK-6638</td> </tr> </tbody> </table> | Series | TE | RBK-ILS-125 | RK-6638 |
| Series | TE | | | | |
| RBK-ILS-125 | RK-6638 | | | | |



Operating Temperature Range



Shrinking Ratio



Shrink Temperature



Flame Retarded



Fluid Resistant

Note: This is a non-preferred product.
Please refer to QSZH datasheet on page 17.
Contact TE Automotive Sales representative.

Protection for Wire Bundles, Connectors, Terminals



RBK-RTP-125 Tubing
Dual wall,
moisture resistant,
heat shrinkable tubing
for ring terminal
applications.



RBK-RTP-125 Tubing

RBK-RTP-125 is a dual wall, heat-shrinkable tubing designed to provide environmental protection for ring terminal assemblies in an automotive environment.

The installed product provides low profile mechanical protection against flexing, abrasion and cut-through as well as electrical insulation.

Benefits

- Environmental Protection¹
- Mechanical Protection against flexing, abrasion and cut-through
- Small cross-sectional profile
- Temperature rated to 125°C²
- RoHS/ELV compliant

¹ Due to the variation in size and design of ring terminals no claim is made with respect to sealing performance.


² Depending on terminal shape. If surfaces are smooth or tapered there may be a tendency for the tube to move at elevated temperatures. Users should evaluate the suitability of this product at their required operating temperatures.

Protection for Wire Bundles, Connectors, Terminals and Splices

Product Features

RBK-RTP-125

- Continuous operating temperature from -55°C up to +125°C
- Minimum shrink temperature: 155°C
- Minimum full recovery temperature: 175°C
- Flame retarded

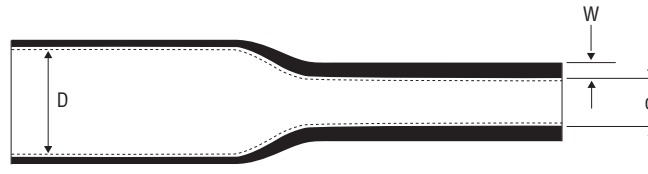

Product Dimensions

| Inside Diameter | | Wall Thickness | | Ordering Description |
|---------------------------------|-------------------------------------------|-------------------------------------------|------------------------------|-----------------------|
| D (min) Expanded as Supplied mm | d (max) Recovered Jacket after Heating mm | W (min) Recovered Jacket after Heating mm | W + Adhesive Liner (min)* mm | |
| 11.00 | 3.45 | 0.70 | 1.40 | RBK-RTP-125-NR500-Col |
| 11.00 | 4.65 | 0.80 | 1.80 | RBK-RTP-125-NR3-Col |
| 20.20 | 11.40 | 1.25 | 2.31 | RBK-RTP-125-NR5-Col |


Supplied tube lengths will be per customer order.

The wall thickness of the tubing will be less than specified if recovery is restricted during shrinkage.

* Nominal values for reference only.

Ordering Information

| Standard Colour | Check with Product Management on colour availability | | | | |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|--------|----|-------------|---------|
| Size Selection | Always order the largest size that will shrink snugly over the component to be covered. Special order sizes are available upon request. | | | | |
| Ordering Description | Specify product name, size and colour (for example RBK-RTP-125-NR) | | | | |
| Specifications/Approvals | <table border="1"> <thead> <tr> <th>Series</th> <th>TE</th> </tr> </thead> <tbody> <tr> <td>RBK-RTP-125</td> <td>RW-6764</td> </tr> </tbody> </table> | Series | TE | RBK-RTP-125 | RW-6764 |
| Series | TE | | | | |
| RBK-RTP-125 | RW-6764 | | | | |



Operating Temperature Range



Shrink Temperature



Flame Retarded




Fluid Resistant

Sealing and Protection for Wire Bundles, Connectors, Terminals and Splices



RBK-VWS-125 Tubing

Clear product for sealing and protection of inline wire splices.

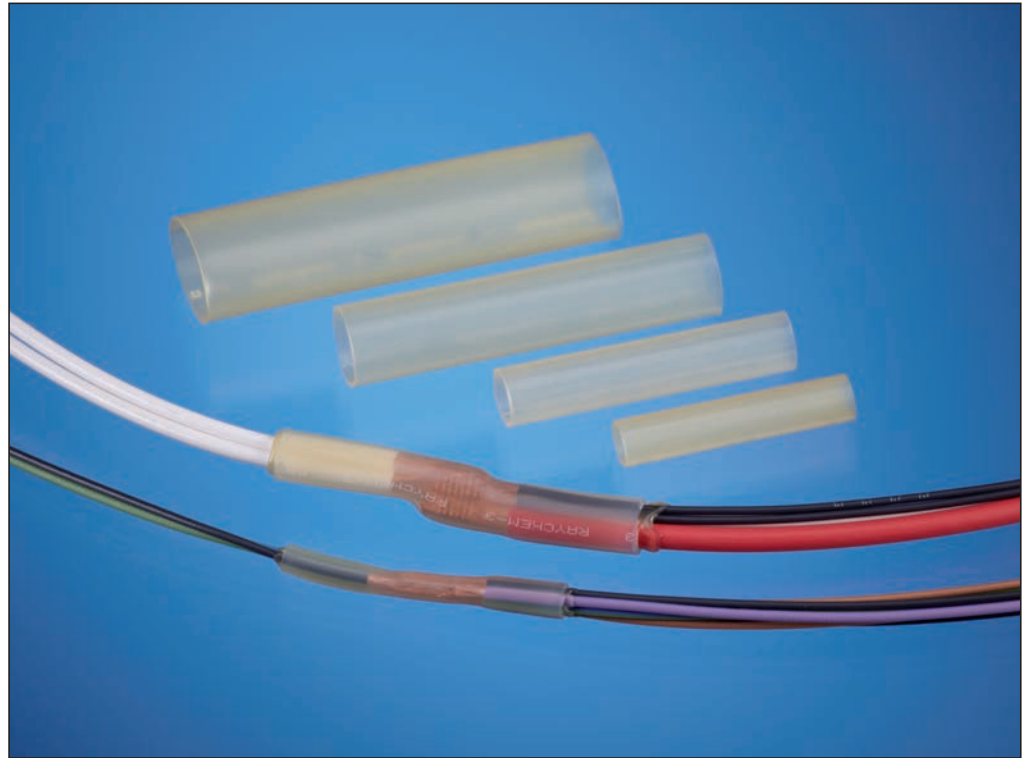

RBK-VWS-125 Tubing

Dual-wall, heat-shrinkable tubing designed to provide environmental sealing of an electrical splice in an automotive environment.

Moisture may enter a splice directly or indirectly via capillary action between individual wires, thus causing corrosion. This effect is accelerated by variations in temperature.

The tubing is centred over the splice area and during heating the adhesive melts and is 'squeezed' around where the wires are crimped or welded and between the conductors by the shrinking action of the sleeve.

The installed product provides low profile mechanical protection against flexing, abrasion and cut-through as well as electrical insulation. There are four sizes to cover the range of splice profiles.

Benefits


- Excellent environmental seal
- Mechanical protection against flexing, abrasion and cut-through
- Small cross-sectional profile
- Single component solution – to seal, protect and insulate most in-line and stub splices
- Complete environmental and moisture sealing – for up to seven wires per side
- Tubing and adhesive combination – for superior strain relief
- Clear tubing allowing inspection of wire splices
- Application equipment and installation procedures – to meet most harness production processes
- Meets most applicable worldwide automotive OEM splice sealing specifications
- RoHS/ELV compliant

Clear, Dual-Wall, Moisture Proof, Heat-Shrinkable Tubing to Protect Electrical Splices

Product Features

RBK-VWS-125 Tubing

- Continuous operating temperature from -40°C up to +125°C (3000 hrs)
- 4:1 shrink ratio

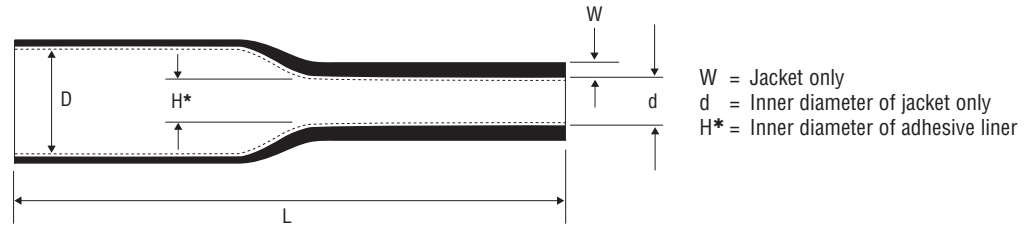

Product Dimensions


| Size | Inside Diameter | | | Wall Thickness (mm) | | Length* ³ L (nom) | Ordering Description |
|------|------------------------------|-----------------------------------------------|----------------------------------------|----------------------------------------|--------------------------|------------------------------------|----------------------|
| | D (min) Expanded as Supplied | H (max)* ¹ Recovered after Heating | d (max) Recovered Jacket after Heating | W (min) Recovered Jacket after Heating | W + Adhesive Liner (min) | | |
| NR1 | 5.70 | 1.27 | 2.52 | 0.80 | 1.42 | 50 | RBK-VWS-125-NR1-X |
| NR2 | 8.00 | 1.65 | 3.01 | 1.06 | 1.78 | 50 | RBK-VWS-125-NR2-X |
| NR3 | 10.80 | 2.40 | 4.55 | 1.16 | 2.14 | 65 | RBK-VWS-125-NR3-X |
| NR4 | 17.78 | 4.45 | 7.40* ² | 1.04 | 2.41 | 75 | RBK-VWS-125-NR4-X |

Refer to the Installation Guidelines document before selecting size (PIP-004).
The wall thickness of the tubing will be less than specified if recovery is restricted during shrinkage.

- *1) Nominal values for reference only.
- *2) Estimate.
- *3) Other lengths are available subject to special order.

Ordering Information

| Standard Colour | Clear (X) | | | | | | | | |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|----|-------------|--|----------|---------|--------|---------|
| Installation | The product may be installed using a TE Automotive RBK-ILS Processor or other recommended application equipment. Consult your local TE Automotive office for more information. | | | | | | | | |
| Size Selection | Refer to PIP-004 | | | | | | | | |
| Ordering Description | Specify product name, size and colour (for example RBK-VWS-125-NR) | | | | | | | | |
| Specifications/Approvals | <table border="1"> <thead> <tr> <th>Series</th> <th>TE</th> </tr> </thead> <tbody> <tr> <td>RBK-VWS-125</td> <td></td> </tr> <tr> <td>Size 1-3</td> <td>RK-6640</td> </tr> <tr> <td>Size 4</td> <td>RT-1113</td> </tr> </tbody> </table> | Series | TE | RBK-VWS-125 | | Size 1-3 | RK-6640 | Size 4 | RT-1113 |
| Series | TE | | | | | | | | |
| RBK-VWS-125 | | | | | | | | | |
| Size 1-3 | RK-6640 | | | | | | | | |
| Size 4 | RT-1113 | | | | | | | | |




Sealing and Protection for Wire Bundles, Connectors, Terminals and Splices



RPPM Tubing

Effective strain relief, protection and insulation for dry area splices.

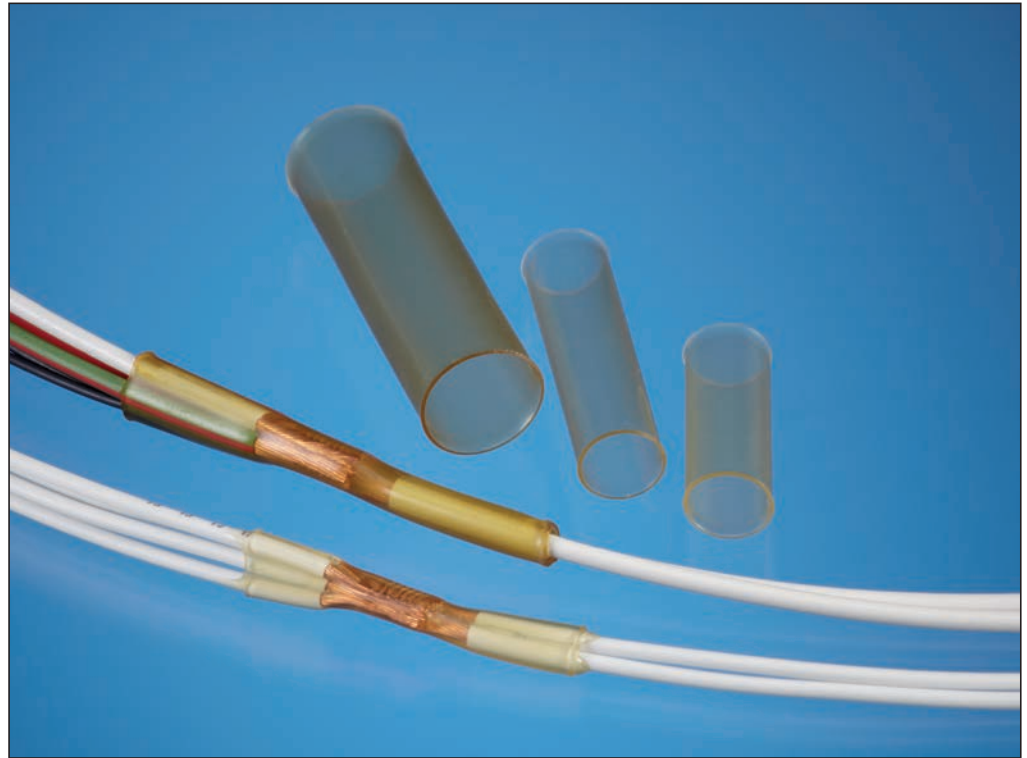

RPPM Tubing

is a flexible, heat-shrinkable, dual-wall tubing with an integrally bonded meltable adhesive liner. Available in clear and black, the tough outer jacket with both types offers excellent mechanical strength.

RPPM is used for moisture proof encapsulation of a wide variety of components. In particular, it adheres well to PVC. The high shrink ratio allows RPPM to be used with a range of dimensions.

Clear RPPM offers excellent clarity for protection of substrates that may need to be inspected during service. Black RPPM has a high gloss finish suitable for cosmetic applications.

Benefits


- Single component solution – to insulate and protect almost all dry area splices
- Repeatable process – not subject to operator variability
- Low cost, high throughput process equipment available – cost competitive with PVC tape
- Rapid installation – up to 2000+ splices per hour
- Low profile protection – reducing the diameter of conduit required
- Reduced total installed cost – less handling than PVC over-taping more than off-sets higher material cost
- Tubing and adhesive combination – for superior strain relief
- High shrink ratios – allow one size to cover a wide range of splice combinations
- RoHS/ELV compliant

Flexible, Dual-Wall, Moisture Proof, Heat-Shrinkable Tubing

Product Features

RPPM Tubing

- Continuous operating temperature from -40°C up to $+85^{\circ}\text{C}$ (3000 hrs)
- Minimum shrink temperature: 60°C
- Minimum full recovery temperature: 80°C
- 4:1 shrink ratio

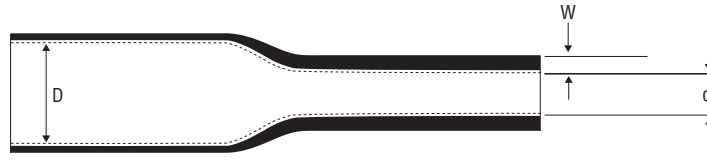


Product Dimensions

| Size | Inside Diameter | | Wall Thickness | | Ordering Description |
|-------|---------------------------------|------------------------------------|-----------------------------------------------|--|------------------------|
| | D (min) Expanded as Supplied mm | d (max) Recovered after Heating mm | W (nom) Total Wall Recovered after Heating mm | | |
| 4/1 | 4.0 | 1.0 | 0.8 | | RPPM-4/1-colour code |
| 8/2 | 8.0 | 2.0 | 0.9 | | RPPM-8/2-colour code |
| 12/3 | 12.0 | 3.0 | 1.2 | | RPPM-12/3-colour code |
| 16/4 | 16.0 | 4.0 | 1.5 | | RPPM-16/4-colour code |
| NR510 | 9.0 | 1.5 | 1.6 | | RPPM-NR510-X |
| NR801 | 6.4 | 1.0 | 0.8 | | RPPM-NR801-colour code |

Order the largest size that will recover snugly over the component to be covered.
The wall thickness of the tubing will be less than specified if recovery is restricted during shrinkage.
Other lengths and sizes are available subject to special order.

Ordering Information

| | | |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| Standard Colours | Clear (X) | Black (0) |
| Size Selection | Always order the largest size that will shrink snugly over the component to be covered. Special order sizes are available upon request. | |
| Ordering Description | Specify product name, size and colour (for example RPPM-8/2-X) | |
| Specifications/Approvals | Series RPPM | TE RK-6214 |



Operating Temperature Range



Shrinking Ratio (up to 7:1)



Shrink Temperature



Fluid Resistant

Protection for Wire Bundles, Connectors, Terminals and Splices



RW-175 Tubing

High temperature tubing with excellent chemical and abrasion resistance. All round general protection and insulation.



RW-175 Tubing

An extremely tough, high temperature, thin-wall insulation tubing. This transparent, non-burning, semi-rigid tubing has superior resistance to most industrial fuels, solvents and chemicals.

Designed for applications requiring strain relief at temperatures up to 175°C, this product is unusually tough in its resistance to abrasion and cut through.

Typical applications include high temperature applications, protection, strain relief, chemical resistance, mechanical and abrasion protection.

The natural rigidity of this material makes it suitable for automated installation via pick and place stations.

Benefits


- Tough, semi-rigid, very thin-wall insulation
- High flame-resistance meeting the requirements of UL and CSA VW-1 rating
- High temperature performance
- Protection from most industrial solvents
- RoHS/ELV compliant

Protection for Wire Bundles, Connectors, Terminals and Splices

Product Features

RW-175 Tubing

- Continuous operating temperature from -55°C up to $+175^{\circ}\text{C}$
- Minimum shrink temperature: 155°C
- Minimum full recovery temperature: 175°C
- Flame retarded
- 2:1 shrink ratio

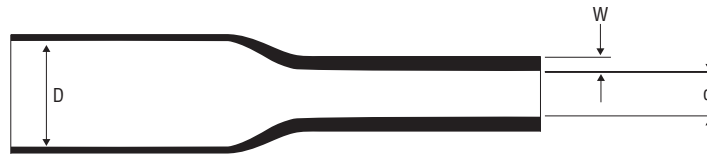

Product Dimensions



| Size | Inside Diameter | | Wall Thickness | | Ordering Description |
|-------|---------------------------------|------------------------------------|------------------------------------|--|----------------------|
| | D (min) Expanded as Supplied mm | d (max) Recovered after Heating mm | W (nom) Recovered after Heating mm | | |
| 3/64 | 1.2 | 0.6 | 0.25 | | RW-175-3/64-X |
| 1/16 | 1.6 | 0.8 | 0.25 | | RW-175-1/16-X |
| 3/32 | 2.4 | 1.2 | 0.27 | | RW-175-3/32-X |
| 1/8 | 3.2 | 1.6 | 0.27 | | RW-175-1/8-X |
| 3/16 | 4.8 | 2.4 | 0.27 | | RW-175-3/16-X |
| 1/4 | 6.4 | 3.2 | 0.33 | | RW-175-1/4-X |
| 3/8 | 9.5 | 4.8 | 0.33 | | RW-175-3/8-X |
| 1/2 | 12.7 | 6.4 | 0.33 | | RW-175-1/2-X |
| 3/4 | 19.0 | 9.5 | 0.43 | | RW-175-3/4-X |
| 1 | 25.4 | 12.7 | 0.48 | | RW-175-1-X |
| 1 1/2 | 38.1 | 19.1 | 0.51 | | RW-175-1 1/2-X |
| 2 | 50.8 | 25.4 | 0.51 | | RW-175-2-X |


Ordering Information

| | | |
|---------------|---------------------|-----------|
| Colour | Standard Colour | Clear (X) |
| | Non-Standard Colour | Black (0) |


| | |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| Size Selection | Always order the largest size that will shrink snugly over the component to be covered. Special order sizes are available upon request. |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------|

| | |
|-----------------------------|-----------------------------------------------------------------------|
| Ordering Description | Specify product name, size and colour (for example RW-175-1/4-colour) |
|-----------------------------|-----------------------------------------------------------------------|

| Specifications/Approvals | Series | UL  | CSA  | TE |
|--------------------------|--------|----------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|------------------------|
| | RW-175 | E35586VW-1 600 V, 150°C | LR31929VW-1 600 V, 150°C | RW-3029/1 RW-3029/2 |



Operating Temperature Range



Shrinking Ratio



Shrink Temperature



Flame Retarded



Fluid Resistant



Canadian Standards Association



Underwriters Laboratories

Protection for Wire Bundles, Connectors, Terminals and Splices



RW-200/RW-200-E Tubing

Heat-shrinkable,
chemical-resistant,
high-temperature tubing.



RW-200/RW-200-E Tubing

Premium heat-shrinkable tubing fabricated from fluoro-elastomers – a crosslinked material designed for a wide range of applications.

It is available in two configurations. RW-200-E is the thickest wall version. RW-200 has the thinnest wall for lighter weight applications.

Offering fluid resistance, RW-200 tubing can be used in applications up to 200 °C [392 °F].

Benefits


- High resistance to impact and abrasion
- Resistance to a wide variety of fuels, lubricants, acids, and solvents at elevated temperatures
- Flexibility at low temperatures without cracking
- RoHS/ELV compliant

RW-200/RW-200-E

Product Features

RW-200/RW-200-E Tubing

- **Operating Temperature Range**
RW-200: -40°C to +200°C
(-40°F to 392°F)
RW-200-E: -55°C to +200°C
(-67°F to 392°F)
- Minimum shrink temperature: 100°C (212°F)
- Minimum full recovery temperature: 175°C (347°F)
- Flame retarded
- 2:1 shrink ratio

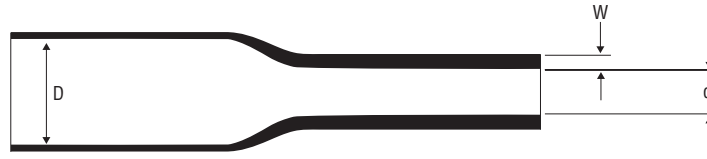


Product Dimensions

| Size | Inside Diameter | | Wall Thickness* | |
|-------|------------------------------|---------------------------------|---------------------------------|--------------|
| | D (min) Expanded as Supplied | d (max) Recovered after Heating | W (nom) Recovered after Heating | |
| | | | RW-200-E | RW-200 |
| 1/8 | 3.2 (0.125) | 1.6 (0.062) | 0.76 (0.030) | 0.76 (0.030) |
| 3/16 | 4.8 (0.187) | 2.4 (0.093) | 0.84 (0.033) | 0.89 (0.035) |
| 1/4 | 6.4 (0.250) | 3.2 (0.125) | 0.89 (0.035) | 0.89 (0.035) |
| 3/8 | 9.5 (0.375) | 4.8 (0.187) | 1.02 (0.040) | 0.89 (0.035) |
| 1/2 | 12.7 (0.500) | 6.4 (0.250) | 1.22 (0.048) | 0.89 (0.035) |
| 5/8 | 15.9 (0.625) | 7.9 (0.312) | – | 1.07 (0.042) |
| 3/4 | 19.1 (0.750) | 9.5 (0.375) | 1.45 (0.057) | 1.07 (0.042) |
| 7/8 | 22.2 (0.875) | 11.1 (0.437) | – | 1.25 (0.049) |
| 1 | 25.4 (1.000) | 12.7 (0.500) | 1.78 (0.070) | 1.25 (0.049) |
| 1 1/4 | 31.8 (1.250) | 15.9 (0.625) | – | 1.40 (0.055) |
| 1 1/2 | 38.1 (1.500) | 19.1 (0.750) | 2.41 (0.095) | 1.40 (0.055) |
| 2 | 50.8 (2.000) | 25.4 (1.000) | 2.79 (0.110) | 1.65 (0.065) |


*) Wall thickness will be less if tubing recovery is restricted during shrinkage.

Ordering Information

| Standard Colour | Black (0) | | | | | | |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|----|--------|---------|----------|---------|
| Size Selection | Always order the largest size that will shrink snugly over the component to be covered. Special order sizes are available upon request. | | | | | | |
| Ordering Description | Specify product name, size and colour (for example RW-200-E-1/4-0, RW-200-1/2-0) | | | | | | |
| Specifications/Approvals | <table border="1"> <thead> <tr> <th>Series</th> <th>TE</th> </tr> </thead> <tbody> <tr> <td>RW-200</td> <td>RW-3037</td> </tr> <tr> <td>RW-200-E</td> <td>RW-3037</td> </tr> </tbody> </table> | Series | TE | RW-200 | RW-3037 | RW-200-E | RW-3037 |
| Series | TE | | | | | | |
| RW-200 | RW-3037 | | | | | | |
| RW-200-E | RW-3037 | | | | | | |



Operating Temperature Range (RW-200-E)



Shrinking Ratio



Shrink Temperature



Flame Retarded



Fluid Resistant

Sealing and Protection for Wire Bundles, Connectors, Terminals and Splices



SCL Tubing

Semi-rigid cross-linked heat-shrinkable encapsulation tubing.



SCL Tubing

Encapsulates components, splices, and terminations where moisture resistance and mechanical protection are required. Encapsulant melts and flows to fill surface irregularities of the substrate. While still hot, the tubing can be blocked to form a wire breakout.

Benefits


- UL approved construction is available
- One-step moisture proof encapsulation
- RoHS/ELV compliant

Semi-Rigid Selectively Crosslinked Heat-Shrinkable Encapsulation Tubing

Product Features

SCL Tubing

- Continuous operating temperature from -55°C up to +110°C
- Minimum shrink temperature: 125°C
- Minimum full recovery temperature: 135°C
- Flame retarded
- 2.5:1 and 3:1 shrink ratio

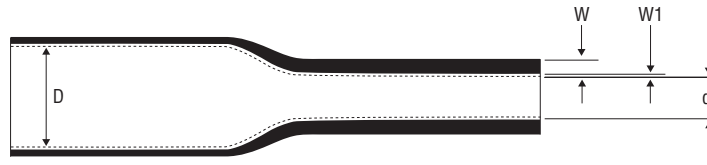


Product Dimensions

| Inside Diameter | | Wall Thickness | | Ordering Description |
|---------------------------------|------------------------------------|-----------------------------------------------|---------------------------------------------------|----------------------|
| D (min) Expanded as Supplied mm | d (max) Recovered after Heating mm | W (nom) Total Wall Recovered after Heating mm | W1 (nom) Meltable Wall Recovered after Heating mm | |
| 3.2 | 0.6 | 0.96 | 0.51 | SCL-1/8-0 |
| 4.8 | 1.5 | 1.09 | 0.64 | SCL-3/16-0 |
| 6.4 | 2.0 | 1.19 | 0.69 | SCL-1/4-0 |
| 9.5 | 3.4 | 1.27 | 0.76 | SCL-3/8-0 |
| 12.7 | 5.0 | 1.39 | 0.89 | SCL-1/2-0 |
| 19.1 | 8.0 | 1.65 | 1.02 | SCL-3/4-0 |
| 25.4 | 10.2 | 1.90 | 1.02 | SCL- 1-0 |

The largest size that will recover snugly over the component to be covered should be ordered. The wall thickness of the tubing will be less than specified if recovery is restricted during shrinkage. Other lengths, colours (colour codes by size) and sizes are available subject to special order. SCL is available in special UL approved constructions.

Ordering Information

| Standard Colour | Black (0) | | | | | | |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|----|----|-----|----------------------|---------|
| Size Selection | Always order the largest size that will shrink snugly over the component to be covered. Special order sizes are available upon request. | | | | | | |
| Ordering Description | Specify product name, size and colour (for example SCL-1/8-0) | | | | | | |
| Specifications/Approvals | <table border="1"> <thead> <tr> <th>Series</th> <th>UL</th> <th>TE</th> </tr> </thead> <tbody> <tr> <td>SCL</td> <td>E85381, 600 V, 125°C</td> <td>RT-1301</td> </tr> </tbody> </table> | Series | UL | TE | SCL | E85381, 600 V, 125°C | RT-1301 |
| Series | UL | TE | | | | | |
| SCL | E85381, 600 V, 125°C | RT-1301 | | | | | |



Operating Temperature Range



Shrinking Ratio



Shrink Temperature



Underwriters Laboratories

Sealing and Protection for Wire Bundles, Connectors, Terminals and Splices



SCT Tubing

SCT Tubing is specially designed to insulate and seal automotive wire splices and components in an under-the-hood automotive environment.



SCT (150°C) Tubing

Dual-wall, heat-shrinkable tubing designed to provide environmental sealing of an electrical splice in an automotive environment.

Moisture may enter a splice directly or indirectly via capillary action between individual wires, thus causing corrosion. This effect is accelerated by variations in temperature.

The tubing is centred over the splice area and during heating the adhesive melts and is 'squeezed' around where the wires are crimped or welded and between the conductors by the shrinking action of the sleeve.

The installed product provides low profile mechanical protection against flexing, abrasion and cut-through as well as electrical insulation. There are four sizes to cover the range of splice profiles.

Benefits


- Excellent environmental seal
- Mechanical protection against flexing, abrasion and cut-through
- Small cross-sectional profile
- 4:1 shrink ratio allows a few sizes to cover a wide range of splice and component diameters
- Flame-retardant and mechanically tough, the tubing provides strain relief and abrasion protection of wire splices, terminals, and other components
- Thick adhesive liner forms an effective barrier against fluids and moisture and performs well at an extended temperature range
- RoHS/ELV compliant

Flame Retardant, Adhesive-Lined, Semi-Rigid Polyolefin, Heat-Shrinkable Tubing

Product Features

SCT (150°C) Tubing

- Continuous operating temperatures from -40°C up to +150°C (3000 hrs)
- Minimum shrink temperature: 110°C
- Minimum full recovery temperature: 135°C
- Flame retarded
- 4:1 shrink ratio

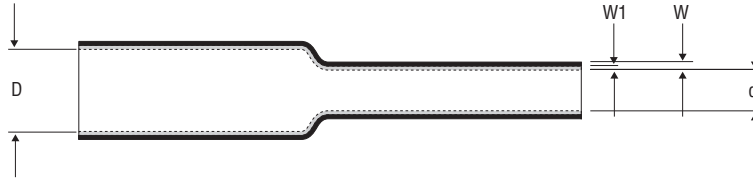


Product Dimensions

| Size | Inside Diameter | | Recovered Wall Thickness* | |
|-----------|----------------------------------------|-------------------------------------------|--------------------------------------------|------------------------------------------|
| | D (min) Expanded as Supplied mm (Inch) | d (max) Recovered after Heating mm (Inch) | W (nom) Total Wall after Heating mm (Inch) | W1 Meltable Wall after Heating mm (Inch) |
| SCT-NO. 1 | 7.6 (.300) | 1.7 (.065) | 1.52 ±.30 (.060 ±.012) | .76 (.030) |
| SCT-NO. 2 | 9.0 (.355) | 2.3 (.090) | 1.52 ±.30 (.060 ±.012) | .76 (.030) |
| SCT-NO. 3 | 11.6 (.455) | 2.5 (.100) | 2.29 ±.30 (.090 ±.012) | 1.40 (.055) |
| SCT-NO. 4 | 17.8 (.700) | 4.4 (.175) | 2.54 ±.30 (.100 ±.012) | 1.52 (.060) |


*) Wall thickness will be less if tubing recovery is restricted during shrinkage.

Ordering Information

| Standard Colour | Black (0) | | | | |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|--------|----|------------|---------|
| Size Selection | Always order the largest size that will shrink snugly over the component being covered. Special order sizes are available upon request. | | | | |
| Standard Packaging | Cut pieces | | | | |
| Marking | Tubing will be printed with its numbered size (such as SCT-1, SCT-2, SCT-3, SCT-4). | | | | |
| Ordering Description | Specify product name, numbered size, colour and cut length (e.g. SCT-NO.3-0-1220mm). | | | | |
| Specifications/Approvals | <table border="1"> <thead> <tr> <th>Series</th> <th>TE</th> </tr> </thead> <tbody> <tr> <td>SCT Tubing</td> <td>SCT SCD</td> </tr> </tbody> </table> | Series | TE | SCT Tubing | SCT SCD |
| Series | TE | | | | |
| SCT Tubing | SCT SCD | | | | |



Operating Temperature Range



Shrinking Ratio



Shrink Temperature



Flame Retarded



Fluid Resistant

Protection for Wire Bundles, Connectors, Terminals and Splices



VERSAFIT Tubing
Highly flame-retarded,
low shrink temperature
polyolefin heat-shrinkable tubing.



VERSAFIT Tubing

VERSAFIT highly flame-retarded, very flexible polyolefin heat-shrinkable tubing has been designed to meet the stringent requirements of UL 224 VW-1 and CSA and is, therefore, recommended for use in applications requiring the highest level of flame retardance.

VERSAFIT tubing will electrically insulate and protect in-line components, terminals and splices, bundle wires for very flexible, light duty harnesses and provide electrical insulation, mechanical protection, cable bundling and strain relief.

Benefits


- Good chemical and solvent resistance
- Excellent physical and electrical properties
- Excellent flammability performance
- Low shrink temperature reduces installation time and the risk of damage to temperature-sensitive components
- Very flexible; doesn't easily wrinkle when bent
- RoHS/ELV compliant

Highly Flame-Retarded, Low Shrink Temperature Polyolefin Heat-Shrinkable Tubing

Product Features

VERSAFIT Tubing

- Continuous operating temperature from -55°C up to +135°C
- Minimum shrink temperature: 70°C
- Minimum full recovery temperature: 90°C
- Flame retarded
- 2:1 shrink ratio

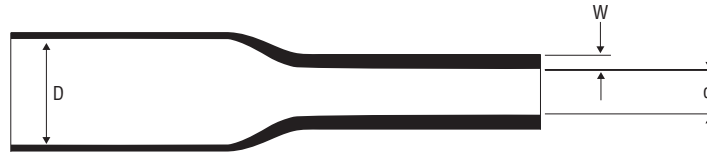

Product Dimensions

| Size | Inside Diameter | | Wall Thickness | | Ordering Description |
|-------|---------------------------------|------------------------------------|------------------------------------|--|------------------------------|
| | D (min) Expanded as Supplied mm | d (max) Recovered after Heating mm | W (nom) Recovered after Heating mm | | |
| 3/64 | 1.63 | 0.58 | 0.40 | | VERSAFIT-3/64-colour code |
| 1/16 | 1.85 | 0.79 | 0.43 | | VERSAFIT-1/16-colour code |
| 3/32 | 2.79 | 1.17 | 0.51 | | VERSAFIT-3/32-colour code |
| 1/8 | 3.43 | 1.57 | 0.51 | | VERSAFIT-1/8-colour code |
| 3/16 | 5.21 | 2.36 | 0.51 | | VERSAFIT-3/16-colour code |
| 1/4 | 7.11 | 3.17 | 0.64 | | VERSAFIT-1/4-colour code |
| 3/8 | 10.16 | 4.74 | 0.64 | | VERSAFIT-3/8-colour code-FSP |
| 1/2 | 13.72 | 6.35 | 0.64 | | VERSAFIT-1/2-colour code-FSP |
| 5/8 | 16.90 | 8.0 | 0.76 | | VERSAFIT-5/8-colour code-FSP |
| 3/4 | 20.45 | 9.52 | 0.76 | | VERSAFIT-3/4-colour code-FSP |
| 1 | 25.53 | 12.7 | 0.89 | | VERSAFIT-1-colour code-FSP |
| 1 1/4 | 33.40 | 15.88 | 1.02 | | VERSAFIT-1-1/4-colour code |
| 1 1/2 | 39.88 | 19.05 | 1.02 | | VERSAFIT-1-1/2-colour code |
| 2 | 52.83 | 25.4 | 1.14 | | VERSAFIT-2-colour code |
| 3 | 78.49 | 38.1 | 1.27 | | VERSAFIT-3-colour code |
| 4 | 104.14 | 50.8 | 1.40 | | VERSAFIT-4-colour code |



Ordering Information


| | | | | | | |
|------------------------|-----------|---------|-----------|----------|------------|-----------|
| Standard Colour | Black (0) | Red (2) | White (9) | Blue (6) | Yellow (4) | Green (5) |
|------------------------|-----------|---------|-----------|----------|------------|-----------|

Sizes 3/64 through 1-inch only
Suffix-FSP Flat Spool Product

Size Selection Always order the largest size that will shrink snugly over the component to be covered. Special order sizes are available upon request.

Ordering Description Specify product name, size and colour (for example Versafit-1/2-colour)


| Specifications/Approvals | Series | UL  | CSA  | TE |
|--------------------------|----------|----------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|---------|
| | VERSAFIT | E35586VW1 600 V, 125°C | LR31929VW1 600 V, 125°C | RW-3009 |



Operating Temperature Range



Shrinking Ratio



Shrink Temperature



Flame Retarded



Canadian Standards Association





Underwriters Laboratories

Engineering Notes

A large grid of graph paper for engineering notes, consisting of a uniform pattern of small squares covering the majority of the page.

Mechanical Protection

- Versatile Protective Coverings for Automotive Components
- Electric Motor Protection
- Wire Harness Protection
- Electronic Component Protection

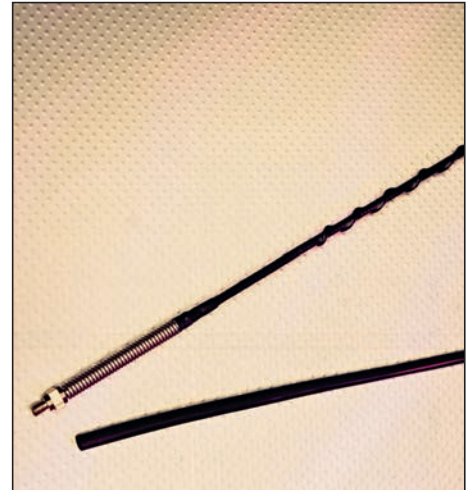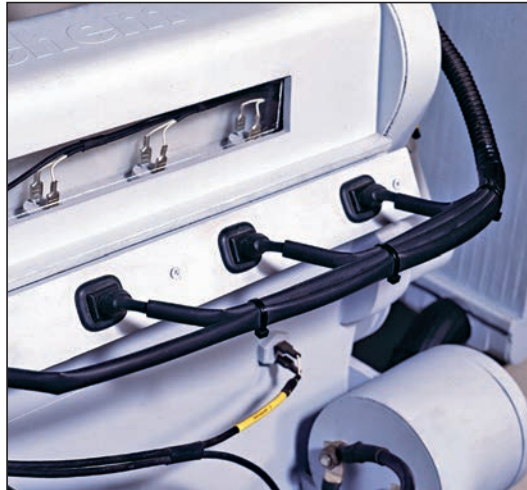


Versatile Protective Coverings for Automotive Components



CGPT Tubing

General purpose,
flame-retardant*
polyolefin tubing.

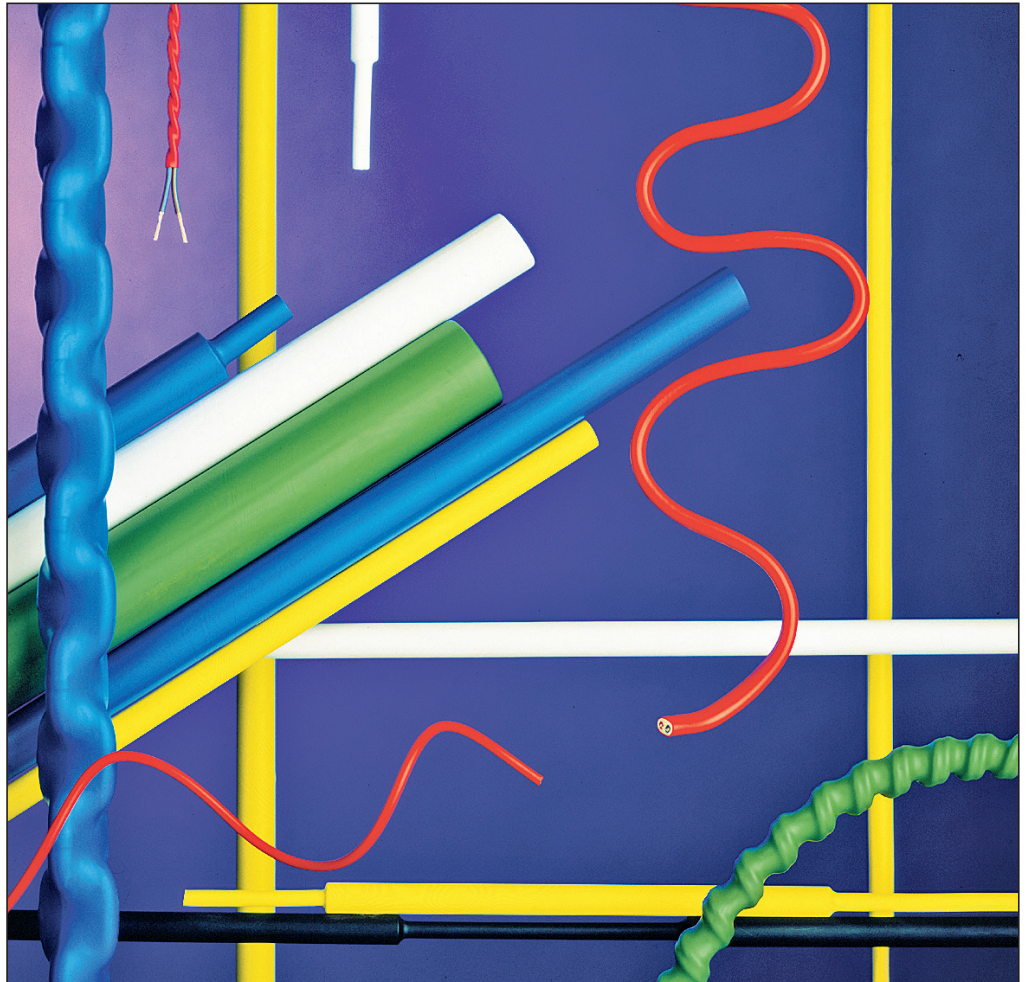

*) Clear product (X)
is not flame-retardant.

CGPT Tubing

A tough, flexible, general purpose polyolefin tubing with good resistance to common fluids and solvents and a high dielectric strength. Its unique blend of chemical, electrical, and physical properties makes it suitable for a wide range of applications, including electrical insulation, strain relief, cable bundling, colour-coding and identification of wires, cables, pipes, and electrical and electronic components, and mechanical protection.

Benefits


- Very good chemical and solvent resistance
- Flexible
- Excellent physical and electrical performance
- RoHS/ELV compliant

General Purpose, Flame Retarded, Polyolefin Heat-Shrinkable Tubing

Product Features

CGPT Tubing

- Continuous operating temperature from -40°C up to +135°C
- Minimum shrink temperature: 80°C
- Minimum full recovery temperature: 120°C
- Flame retarded
- 2:1 and 3:1 shrink ratio

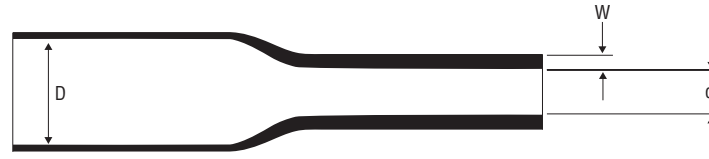

Product Dimensions

| Size | Inside Diameter | | Wall Thickness | | Ordering Description |
|-------------------------|---------------------------------|------------------------------------|------------------------------------|--|---------------------------------|
| | D (min) Expanded as Supplied mm | d (max) Recovered after Heating mm | W (nom) Recovered after Heating mm | | |
| 2:1 Shrink Ratio | | | | | |
| 1.2/0.6 | 1.2 | 0.6 | 0.45 | | CGPT-1.2/0.6-colour code |
| 1.6/0.8 | 1.6 | 0.8 | 0.45 | | CGPT-1.6/0.8-colour code |
| 2.4/1.2 | 2.4 | 1.2 | 0.50 | | CGPT-2.4/1.2-colour code |
| 3.2/1.6 | 3.2 | 1.6 | 0.50 | | CGPT-3.2/1.6-colour code* |
| 4.8/2.4 | 4.8 | 2.4 | 0.50 | | CGPT-4.8/2.4-colour code* |
| 6.4/3.2 | 6.4 | 3.2 | 0.65 | | CGPT-6.4/3.2-colour code* |
| 9.5/4.8 | 9.5 | 4.8 | 0.65 | | CGPT-9.5/4.8-colour code-FSP* |
| 12.7/6.4 | 12.7 | 6.4 | 0.65 | | CGPT-12.7/6.4-colour code-FSP* |
| 19/9.5 | 19.0 | 9.5 | 0.75 | | CGPT-19/9.5-colour code-FSP* |
| 25.4/12.7 | 25.4 | 12.7 | 0.90 | | CGPT-25.4/12.7-colour code-FSP* |
| 32/16 | 32.0 | 16.0 | 0.95 | | CGPT-32/16-colour code* |
| 38/19 | 38.0 | 19.0 | 1.00 | | CGPT-38/19-colour code* |
| 51/25.4 | 51.0 | 25.4 | 1.15 | | CGPT-51/25.4-colour code |
| 76/38 | 76.0 | 38.0 | 1.25 | | CGPT-76/38-colour code |
| 102/51 | 102.0 | 51.0 | 1.40 | | CGPT-102/51-colour code |
| 3:1 Shrink Ratio | | | | | |
| 1.5/0.5 | 1.5 | 0.5 | 0.45 | | CGPT-1.5/0.5-colour code |
| 3/1 | 3.0 | 1.0 | 0.55 | | CGPT-3/1-colour code |
| 6/2 | 6.0 | 2.0 | 0.65 | | CGPT-6/2-colour code |
| 9/3 | 9.0 | 3.0 | 0.75 | | CGPT-9/3-colour code |
| 12/4 | 12.0 | 4.0 | 0.75 | | CGPT-12/4-colour code |
| 18/6 | 18.0 | 6.0 | 0.85 | | CGPT-18/6-colour code |
| 24/8 | 24.0 | 8.0 | 1.00 | | CGPT-24/8-colour code |
| 39/13 | 39.0 | 13.0 | 1.15 | | CGPT-39/13-colour code |



*) Material supplied on Flat Spooled Packaging (FSP) as standard.

Ordering Information


| | | | | | | |
|-------------------------|------------------------|----------------------|------------------------------------|-----------|----------|-----------|
| Standard Colours | Black (0) Clear (X) | Red (2) Brown (1) | Yellow (4) Green/Yellow stripes | Green (5) | Blue (6) | White (9) |
|-------------------------|------------------------|----------------------|------------------------------------|-----------|----------|-----------|

Size Selection Always order the largest size that will shrink snugly over the component to be covered. Special order sizes are available upon request.

Ordering Description Specify product name, size and colour (for example CGPT-3.2/1.6-colour)

| | | | | |
|---------------------------------|------------------------|-------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|----------------------|
| Specifications/Approvals | Series CGPT* | UL  E35586 600 V, 125°C | CSA  LR31929 600 V, 125°C | TE RW-2059 |
|---------------------------------|------------------------|-------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|----------------------|

*) clear product (x) is not flame retarded



Operating Temperature Range



Shrinking Ratio



Shrink Temperature



Flame Retarded



Fluid Resistant



Canadian Standards Association



Underwriters Laboratories

Versatile Protective Coverings for Automotive Components



HCTE Tubing

Helical convolex tubing with a high crush resistance.



HCTE Tubing

Flexible convoluted conduit manufactured from radiation crosslinked, modified Ethylene Tetrafluoroethylene (ETFE). Its helical construction combines a high degree of flexibility with excellent crush resistance.

HCTE will operate continuously at temperatures up to 200°C and up to 300°C for limited periods.

Used as a conduit to provide mechanical protection for electrical wiring systems in applications requiring flexibility, high-temperature performance and good resistance to a variety of fluids. Widely used in the military and commercial aerospace industries.

Can be used in conjunction with other TE Connectivity's Raychem components to form an integrated harnessing system.

Installation

It is recommended that no more than 70% of the internal area ("fill factor") of the HCTE conduit be occupied by wires in any application.

Benefits

- Highly flame-retardant
- Highly flexible and fluid resistant
- Not heat-shrinkable
- High crush resistance
- RoHS/ELV compliant

Versatile Protective Coverings for Automotive Components

Product Features

HCTE Tubing


- Operating temperature Range
-55°C up to +200°C
- Flame retarded
- 2:1 shrink ratio

Product Dimensions


| Size | Inside Diameter Minimum mm | Outside Diameter Maximum mm | Maximum Wall Thickness mm |
|------|----------------------------------|-----------------------------------|---------------------------------|
| 0187 | 4.60 | 8.10 | 0.46 |
| 0281 | 6.90 | 10.50 | 0.46 |
| 0312 | 7.70 | 11.80 | 0.46 |
| 0375 | 9.20 | 12.90 | 0.46 |
| 0437 | 10.80 | 14.50 | 0.46 |
| 0500 | 12.30 | 16.50 | 0.58 |
| 0625 | 15.40 | 19.50 | 0.58 |
| 0750 | 17.90 | 23.60 | 0.58 |
| 0875 | 21.80 | 27.20 | 0.58 |
| 1000 | 24.70 | 31.10 | 0.58 |
| 1250 | 30.70 | 35.30 | 0.58 |
| 1500 | 36.50 | 46.50 | 0.58 |
| 1625 | 39.60 | 50.17 | 0.58 |
| 1750 | 42.67 | 52.88 | 0.58 |
| 2000 | 49.20 | 59.23 | 0.58 |

Ordering Information

| Standard Colour | Black (0) | | | | |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|--------|----|------|---------|
| Size Selection | Always order a conduit size that will ensure that a "fill factor" of 70% is not exceeded. | | | | |
| Ordering Description | Specify product name, size and colour (for example HCTE-0187-0) | | | | |
| Specifications/Approvals | <table border="1"> <thead> <tr> <th>Series</th> <th>TE</th> </tr> </thead> <tbody> <tr> <td>HCTE</td> <td>RT-1162</td> </tr> </tbody> </table> | Series | TE | HCTE | RT-1162 |
| Series | TE | | | | |
| HCTE | RT-1162 | | | | |



Operating
Temperature Range



Shrinking Ratio



Flame Retarded

Versatile Protective Coverings for Automotive Components



HFT 5000 Tubing
Heat shrinkable
abrasion resistant
woven fabric tube.



HFT 5000 Tubing

HFT 5000 tubing products are made of very flexible heat-shrinkable fabric material, they shrink and fit snugly and securely around the underlying substrate.

Designed primarily to provide mechanical abrasion protection for components such as rubber hoses, plastic pipes, and harness wiring bundles, they are also suitable for other applications, such as noise and rattle suppression.

The woven construction makes HFT 5000 extremely flexible and resistant to trapping water, heat and humidity. It provides outstanding abrasion, chafing and cutting protection, even at high temperatures. HFT-5000 product is easy to install and can be cut with standard industrial cutting equipment.

Benefits


- Extremely tough – meeting even demanding automotive abrasion specifications
- Protect only where protection is needed – minimising cost
- Safe installation with no hot knife cutting equipment required – reduces investment
- Soft to handle so operators do not need to wear gloves – increases productivity
- Can be cut with conventional guillotines or even scissors
- Resists hose pulsing effects
- Halogen free
- Resistant to harsh environments such as engine compartments
- Grips substrates tightly without additional fixing
- Highly flexible woven fabric construction for easy installation onto awkward substrates such as tightly angled hoses
- RoHS/ELV compliant

Heat-Shrinkable Fabric Tubing

Product Features

HFT 5000 Tubing

- Continuous operating temperature from
-40°C up to +125°C (3000 hrs)
-40°C up to +150°C (1000 hrs)
- Minimum shrink temperature: 80°C
- Minimum full recovery temperature: 110°C
- Low shrink temperature
- 2:1 shrink ratio

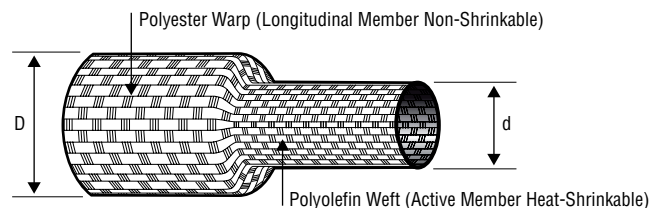

Product Dimensions

Standard Sizes

Inside Diameter

| D (min) Expanded as Supplied mm | d (max) Recovered after Heating mm | Ordering Description |
|------------------------------------------|---------------------------------------------|----------------------|
| 12 | 6 | HFT-5000-12/6-0 |
| 20 | 10 | HFT-5000-20/10-0 |
| 25 | 12 | HFT-5000-25/12-0 |
| 30 | 15 | HFT-5000-30/15-0 |
| 34 | 17 | HFT-5000-34/17-0 |
| 40 | 20 | HFT-5000-40/20-0 |
| 50 | 25 | HFT-5000-50/25-0 |
| 60 | 30 | HFT-5000-60/30-0 |
| 70 | 35 | HFT-5000-70/35-0 |
| 80 | 40 | HFT-5000-80/40-0 |
| 100 | 50 | HFT-5000-100/50-0 |

Ordering Information

Standard Colour

Black (0)

Note: Fully recoverable fabric wall thickness: Approximately 1 mm.
Longitudinal change on full recovery is -10% to -20%; 0 = Black

For full product performance details consult TE Automotive Specifications RW-2060.


Specifications/Approvals

Series TE

HFT 5000 Tubing RW-2060

Material Safety Data Sheet available on request.

Installation instructions available on request.



Operating
Temperature Range



Shrinking Ratio



Shrink
Temperature




Fluid Resistant

Versatile Protective Coverings for Automotive Components



NETM Tubing
Specially designed for use in electrical harnesses.

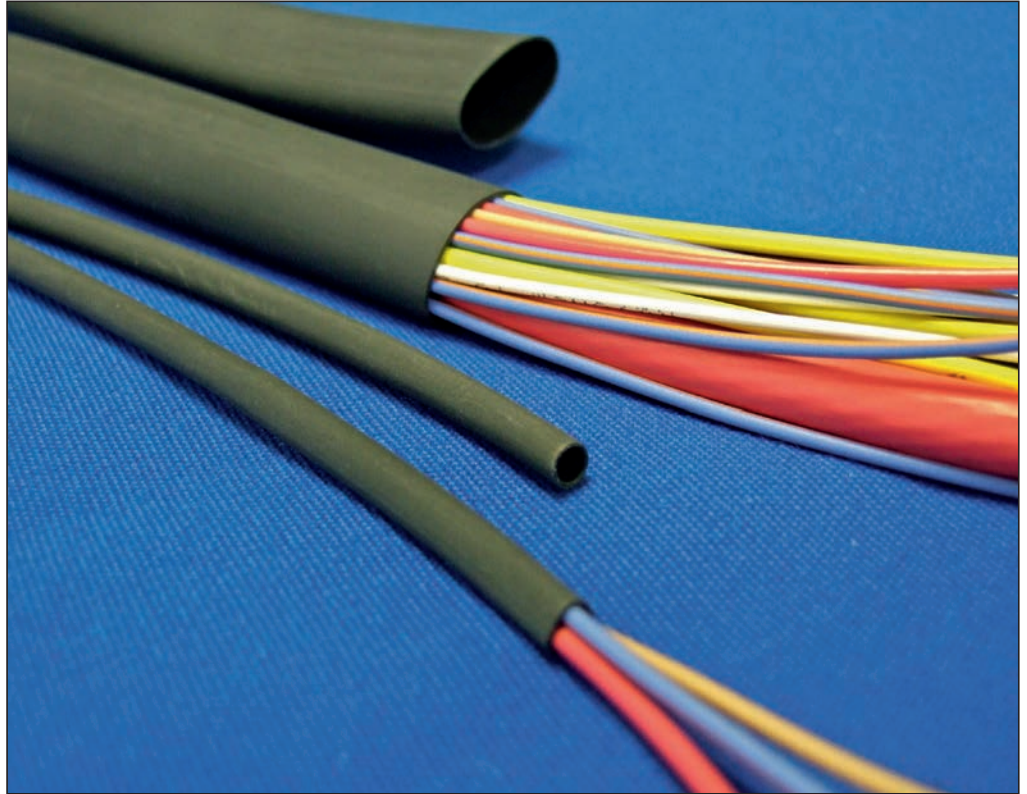

NETM Tubing

Non heat-shrink tubing designed for electrical harnessing needs. Particularly suitable for the aggressive environment of car engines, NETM can withstand higher temperatures than traditional PVC materials whilst retaining its high level of performance.

NETM1000 is the more flexible product, enabling it to be easily routed through engine spaces. NETM2000 offers greater mechanical strength and excellent abrasion resistance.

NETM products are durable non-shrinking polyolefin tubings which remain heat resistant up to at least 130°C. Specifically designed for use in electrical harnesses, NETM tubings are flame retarded and offer excellent abrasion resistance.

NETM1000 is a more flexible 125 °C product allowing it to follow wiring bundles routed in tight bends around underbonnet components. NETM2000 is designed for higher temperature applications rated up to 150 °C.

Benefits

- Excellent heat resistance
- Flexible
- Good mechanical strength
- RoHS/ELV compliant

Non Heat-Shrink Harness Tubing

Product Features


NETM Tubing

- Operating temperature from -55°C up to +135°C (NETM-1000)
- Operating temperature from -40°C up to +150°C (NETM-2000)




Product Dimensions and Ordering Information

| | Inside Diameter D (nom) Supplied mm | Wall Thickness W (nom) mm | Product Description |
|------------------------|----------------------------------------------|---------------------------------|---------------------|
| NETM1000 | 3 | 0.5 | NETM1000-3-0-SP |
| | 4 | 0.5 | NETM1000-4-0-SP |
| | 5 | 0.5 | NETM1000-5-0-SP |
| | 6 | 0.5 | NETM1000-6-0-SP |
| | 8 | 0.5 | NETM1000-8-0-SP |
| | 10 | 0.5 | NETM1000-10-0-SP |
| | 12 | 0.5 | NETM1000-12-0-SP |
| NETM2000 | 14 | 0.5 | NETM1000-14-0-SP |
| | 6 | 0.5 | NETM2000-6-0-SP |
| | 8 | 0.5 | NETM2000-8-0-SP |
| | 10 | 0.5 | NETM2000-10-0-SP |
| | 12 | 0.5 | NETM2000-12-0-SP |
| Standard Colour | Black (0) | | |



Operating
Temperature Range



Operating
Temperature Range

Versatile Protective Coverings for Automotive Components



RNF-100 Tubing
Cost-effective localized protection for wires and cables in high temperature environments.



RNF-100

Premium grade polyolefin based heat-shrinkable tubing with an outstanding overall balance of properties.

The product has a wide range of industrial approvals. RNF-100 tubing possesses a unique blend of physical, chemical and electrical properties and is suitable for a wide range of applications.

Used extensively for lightweight harness jackets, insulation, colour coding, identification, protection against fluids and provides mechanical strength.

Benefits


- Outstanding all round performance
- Excellent physical and electrical performance
- Good chemical and solvent resistance
- Flexible
- RoHS/ELV compliant

Versatile Protective Coverings for Automotive Components

Product Features

RNF-100 Tubing

- Continuous operating temperature from -55°C up to +135°C
- Minimum shrink temperature: 95°C
- Minimum full recovery temperature: 121°C
- Flame retarded (colours only)
- 2:1 shrink ratio

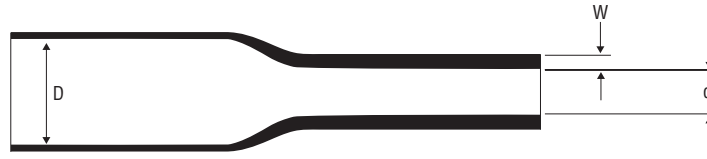

Product Dimensions

| Size | Inside Diameter | | Wall Thickness | | Ordering Description |
|-------|---------------------------------|------------------------------------|------------------------------------|--|------------------------------|
| | D (min) Expanded as Supplied mm | d (max) Recovered after Heating mm | W (nom) Recovered after Heating mm | | |
| 3/64 | 1.2 | 0.6 | 0.45 | | RNF-100-3/64-colour code |
| 1/16 | 1.6 | 0.8 | 0.45 | | RNF-100-1/16-colour code |
| 3/32 | 2.4 | 1.2 | 0.50 | | RNF-100-3/32-colour code |
| 1/8 | 3.2 | 1.6 | 0.50 | | RNF-100-1/8-colour code |
| 3/16 | 4.8 | 2.4 | 0.50 | | RNF-100-3/16-colour code |
| 1/4 | 6.4 | 3.2 | 0.65 | | RNF-100-1/4-colour code |
| 3/8 | 9.5 | 4.8 | 0.65 | | RNF-100-3/8-colour code-FSP* |
| 1/2 | 12.7 | 6.4 | 0.65 | | RNF-100-1/2-colour code-FSP* |
| 3/4 | 19.0 | 9.5 | 0.75 | | RNF-100-3/4-colour code-FSP* |
| 1 | 25.4 | 12.7 | 0.90 | | RNF-100-1-colour code-FSP* |
| 1 1/4 | 31.0 | 16.0 | 0.95 | | RNF-100-1-1/4-colour code |
| 1 1/2 | 38.0 | 19.0 | 1.00 | | RNF-100-1-1/2-colour code |
| 2 | 51.0 | 25.4 | 1.15 | | RNF-100-2-colour code |
| 3 | 76.0 | 38.0 | 1.25 | | RNF-100-3-colour code |
| 4 | 102.0 | 51.0 | 1.40 | | RNF-100-4-colour code |
| 5 | 127.0 | 63.5 | 1.52 | | RNF-100-5-colour code |



*) Material supplied on Flat Spooled Packaging (FSP) as standard.


Ordering Information

Standard Colours Clear (X) Black (0) Red (2) Yellow (4) Green (5) Blue (6) White (9)

Size Selection Always order the largest size that will shrink snugly over the component to be covered. Special order sizes are available upon request.

Ordering Description Specify product name, size and colour (for example RNF-100-1/8-0)

| Specifications/Approvals | Series | UL  | CSA  | TE |
|--------------------------|--------------------------|----------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|--------------------------|
| | RNF-100 Type 1 (colours) | E35586 600 V, 125°C | LR31929 600 V, 125°C | RT-350 Type 1 RK-6001 |
| | RNF-100 Type 2 (clear) | E35586 600 V, 125°C | LR31929 600 V, 125°C | RT-350 Type 2 RK-6001 |



Operating Temperature Range



Shrinking Ratio



Shrink Temperature



Flame Retarded



Fluid Resistant



Canadian Standards Association



Underwriters Laboratories

Versatile Protective Coverings for Automotive Components



RNF-150 Tubing
High-performance,
flame-resistant, flexible,
fluoropolymer tubing.



RNF-150 Tubing

Can be used for jacketing and bundling of wires to form light-duty harnesses, especially where a low profile, abrasion resistance, and flexibility are needed.

Can also be used to provide insulation and strain relief of electrical connections and wire terminations, identification of wires, and packaging of components.

Benefits


- Approximately 40 % thinner walls than most general purpose polyolefin tubings
- High flame-resistance
- Excellent physical and electrical properties after exposure to many chemicals and solvents at 50 °C (but not recommended for use in direct contact with ketones)
- Recommended maximum temperature for use as a primary insulator: 135 °C
- RoHS/ELV compliant

Versatile Protective Coverings for Automotive Components

Product Features

RNF-150 Tubing

- Continuous operating temperature from -55°C up to +150°C
- Minimum shrink temperature: 110°C (230°F)
- Minimum full recovery temperature: 150°C (302°F)
- Flame retarded
- 2:1 shrink ratio

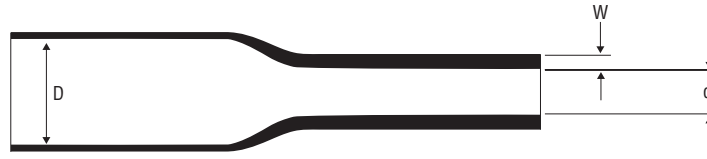



Product Dimensions

| Size | Inside Diameter | | Wall Thickness* | Ordering Description |
|------|--------------------------------------|-----------------------------------------|-----------------------------------|--------------------------|
| | D (min) Expanded as Supplied mm/inch | d (max) Recovered after Heating mm/inch | W Recovered after Heating mm/inch | |
| 3/64 | 1.2 (0.046) | 0.6 (0.023) | 0.25 ±0.05 (0.010 ±0.002) | RNF-150-3/64-colour code |
| 1/16 | 1.6 (0.063) | 0.8 (0.031) | 0.25 ±0.05 (0.010 ±0.002) | RNF-150-1/16-colour code |
| 3/32 | 2.4 (0.093) | 1.2 (0.046) | 0.25 ±0.05 (0.010 ±0.002) | RNF-150-3/32-colour code |
| 1/8 | 3.2 (0.125) | 1.6 (0.062) | 0.25 ±0.05 (0.010 ±0.002) | RNF-150-1/8-colour code |
| 3/16 | 4.8 (0.187) | 2.4 (0.093) | 0.25 ±0.05 (0.010 ±0.002) | RNF-150-3/16-colour code |
| 1/4 | 6.4 (0.250) | 3.2 (0.125) | 0.30 ±0.08 (0.012 ±0.003) | RNF-150-1/4-colour code |
| 3/8 | 9.5 (0.375) | 4.8 (0.187) | 0.30 ±0.08 (0.012 ±0.003) | RNF-150-3/8-colour code |
| 1/2 | 12.7 (0.500) | 6.4 (0.250) | 0.30 ±0.08 (0.012 ±0.003) | RNF-150-1/2-colour code |
| 3/4 | 19.0 (0.750) | 9.5 (0.375) | 0.43 ±0.08 (0.017 ±0.003) | RNF-150-3/4-colour code |
| 1 | 25.4 (1.000) | 12.7 (0.500) | 0.48 ±0.08 (0.019 ±0.003) | RNF-150-1-colour code |

*) Wall thickness will be less if tubing recovery is restricted during shrinkage.

Ordering Information

| Standard Colour | Black (0) | | | | | | |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|----|----|---------|---------------------------|--------|
| Size Selection | Always order the largest size that will shrink snugly over the component to be covered. Special order sizes are available upon request. | | | | | | |
| Ordering Description** | Specify product name, size and colour (for example RNF-150-1/4-0) **) Europe only | | | | | | |
| Specifications/Approvals | <table border="1"> <thead> <tr> <th>Series</th> <th>UL</th> <th>TE</th> </tr> </thead> <tbody> <tr> <td>RNF-150</td> <td>E35586 VW-1, 600 V, 150°C</td> <td>RT-370</td> </tr> </tbody> </table> | Series | UL | TE | RNF-150 | E35586 VW-1, 600 V, 150°C | RT-370 |
| Series | UL | TE | | | | | |
| RNF-150 | E35586 VW-1, 600 V, 150°C | RT-370 | | | | | |




Versatile Protective Coverings for Automotive Components



RNF-3000 Tubing

**Flexible,
high-shrink-ratio,
flame-retardant,
general purpose,
polyolefin tubing.**

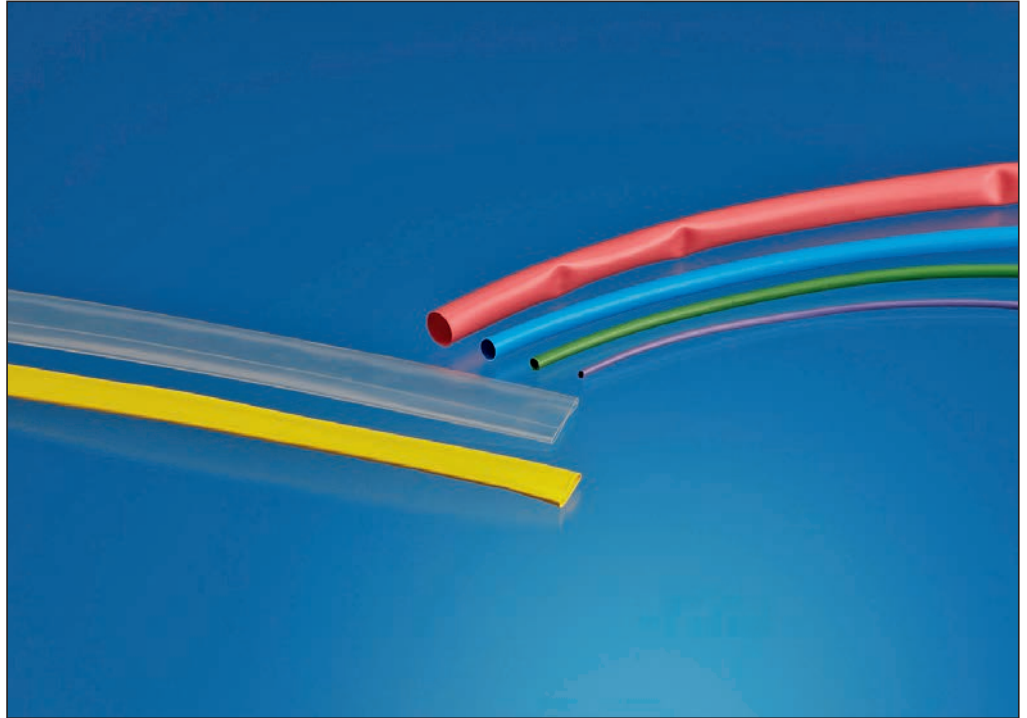

RNF-3000 Tubing

Used for insulation and strain relief of wire terminations and electrical connections. Also suitable for light-duty harnessing, jacketing, and identification of wires, cables, and electrical and electronic components.

Benefits


- 3:1 shrink ratio easily accommodates awkward, irregular shapes
- Few sizes cover a wide range of diameters, allowing reduced inventory
- Excellent physical, chemical, and electrical properties meet industry standards for highly reliable, general purpose tubing
- RoHS/ELV compliant

Versatile Protective Coverings for Automotive Components

Product Features

RNF-3000 Tubing

- Continuous operating temperature from -55°C up to +135°C
- Minimum shrink temperature: 80°C
- Minimum full recovery temperature: 120°C
- Flame retarded
- 3:1 shrink ratio

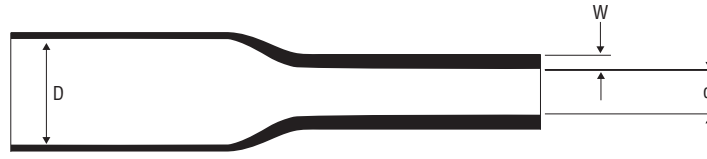

Product Dimensions

| Size | Inside Diameter | | Wall Thickness* | Ordering Description |
|---------|---------------------------------|------------------------------------|------------------------------|------------------------------|
| | D (min) Expanded as Supplied mm | d (max) Recovered after Heating mm | W Recovered after Heating mm | |
| 1.5/0.5 | 1.5 | 0.5 | 0.45 | RNF-3000-1.5/0.5-colour code |
| 3/1 | 3.0 | 1.0 | 0.55 | RNF-3000-3/1-colour code |
| 4.5/1.5 | 4.5 | 1.5 | 0.55 | RNF-3000-4.5/1.5-colour code |
| 6/2 | 6.0 | 2.0 | 0.65 | RNF-3000-6/2-colour code |
| 9/3 | 9.0 | 3.0 | 0.75 | RNF-3000-9/3-colour code |
| 12/4 | 12.0 | 4.0 | 0.75 | RNF-3000-12/4-colour code |
| 18/6 | 18.0 | 6.0 | 0.85 | RNF-3000-18/6-colour code |
| 24/8 | 24.0 | 8.0 | 1.00 | RNF-3000-24/8-colour code |
| 39/13 | 39.0 | 13.0 | 1.15 | RNF-3000-39/13-colour code |



*) Wall thickness will be less if tubing recovery is restricted during shrinkage.


Ordering Information

Standard Colours Black (0) White (9) Red (2) Blue (6) Yellow (4) Clear (X)


Size Selection Always order the largest size that will shrink snugly over the component to be covered. Special order sizes are available upon request.

Ordering Description Specify product name, size and colour (for example RNF-3000-6/2-0)

| Specifications/Approvals | Series | UL  | CSA  | TE |
|--------------------------|----------|----------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|---------|
| | RNF-3000 | E35586 600 V, 125°C | LR31929 600 V, 125°C | RW-2053 |



Operating Temperature Range



Shrinking Ratio



Shrink Temperature



Flame Retarded



Fluid Resistant



Canadian Standards Association




Underwriters Laboratories

Versatile Protective Coverings for Automotive Components



RPPM Tubing

Flexible dual wall, moisture proof heat-shrinkable tubing.

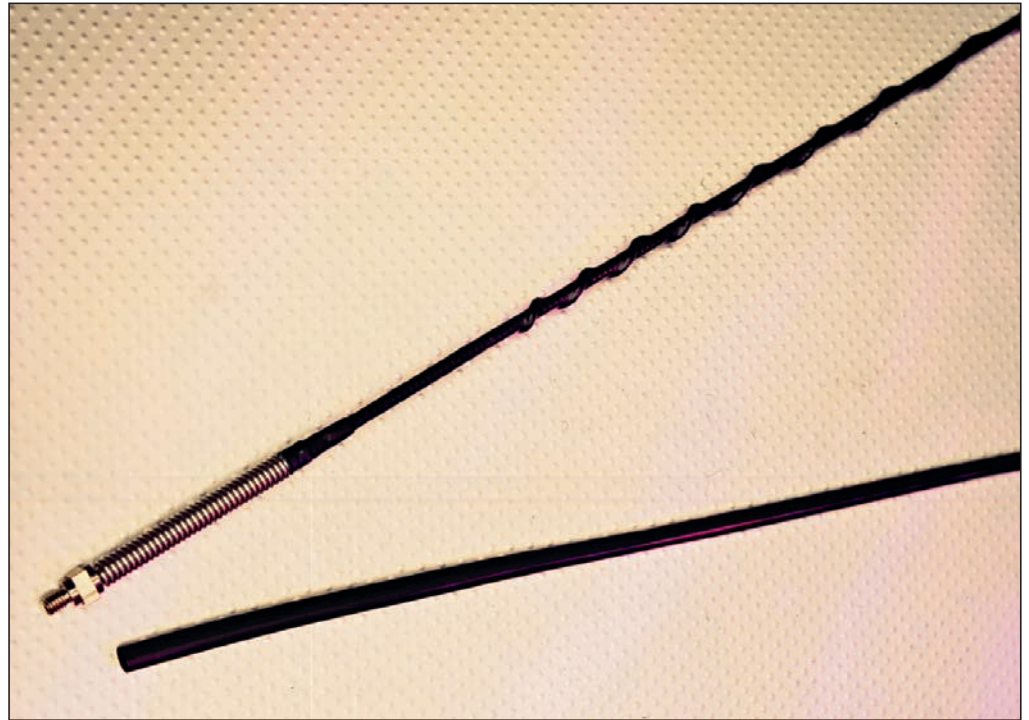

RPPM Tubing

Flexible, heat-shrinkable dual-wall tubing with an integrally bonded meltable adhesive liner. The tough outer jacket offers excellent mechanical strength, yet is flexible enough to cater for a high degree of movement.

Available in clear and black, the tough outer jacket with both types offers excellent mechanical strength.

RPPM is used for moisture proof encapsulation of a wide variety of components. In particular, it adheres well to PVC. The high shrink ratio allows RPPM to be used with a range of dimensions.

Clear RPPM offers excellent clarity for protection of substrates that may need to be inspected during service. Black RPPM has a high gloss finish suitable for cosmetic applications.

Benefits


- Protects antenna and locates and protects antenna windings, in one simple process
- Adhesive lined – to fix winding and tubing permanently in position
- High shrink ratio (6:1) – providing a snug fit on both winding and bare antenna diameters
- Low wind noise – ultra thinwall tubing provides minimal wind shear
- Shiny black finish
- Minimal tooling and handling costs – simply cut what you need
- Versatile product – one tubing size shrinks to fit a range of antenna diameters
- Easy, low-cost installation process – using high volume hot air, convection or infra-red equipment
- RoHS/ELV compliant

Flexible, Dual-Wall, Moisture Proof, Heat-Shrinkable Tubing

Product Features

RPPM Tubing

- Continuous operating temperature from -40°C up to +85°C (3000 hrs)
- Minimum shrink temperature: 60°C
- Minimum full recovery temperature: 80°C
- 4:1 shrink ratio

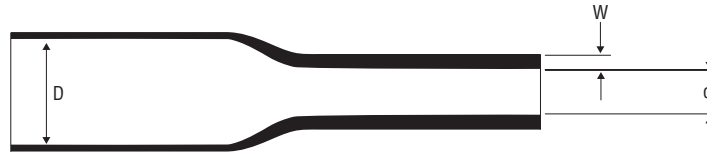


Product Dimensions

| Size | Inside Diameter | | Wall Thickness | | Ordering Description |
|-------|---------------------------------|------------------------------------|-----------------------------------------------|--|------------------------|
| | D (min) Expanded as Supplied mm | d (max) Recovered after Heating mm | W (nom) Total Wall Recovered after Heating mm | | |
| 4/1 | 4.0 | 1.0 | 0.8 | | RPPM-4/1-colour code |
| 8/2 | 8.0 | 2.0 | 0.9 | | RPPM-8/2-colour code |
| 12/3 | 12.0 | 3.0 | 1.2 | | RPPM-12/3-colour code |
| 16/4 | 16.0 | 4.0 | 1.5 | | RPPM-16/4-colour code |
| NR510 | 9.0 | 1.5 | 1.6 | | RPPM-NR510-X |
| NR801 | 6.4 | 1.0 | 0.8 | | RPPM-NR801-colour code |

Order the largest size that will recover snugly over the component to be covered. The wall thickness of the tubing will be less than specified if recovery is restricted during shrinkage. Other lengths and sizes are available subject to special order.

Ordering Information

| | | |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| Standard Colours | Black (0) | Clear (X) |
| Size Selection | Always order the largest size that will shrink snugly over the component to be covered. Special order sizes are available upon request. | |
| Ordering Description | Specify product name, size and colour (for example RPPM-8/2-X) | |
| Specifications/Approvals | Series RPPM | TE RK-6214 |



Operating Temperature Range



Shrinking Ratio (up to 7:1)



Shrink Temperature



Fluid Resistant

Versatile Protective Coverings for Automotive Components



RPT-120 Tubing
Thin-wall tubing, conforms and protects substrates as a cost-effective alternative solution to paint.



RPT-120 Tubing

This resilient tubing offers an alternative to paint, particularly suitable for round substrates. It provides excellent mechanical and corrosion protection compared to paint and the high quality surface creates a quality image for the component being protected.

Product Features

RPT-120 Tubing

- Provides a tough resilient layer to protect the component beneath
- Easy to install with conventional heating equipment
- Low cost of set up

Benefits


- Provides a resilient layer protecting the component beneath from damage and corrosion
- Good surface finish giving a professional look to the final product
- Less taxing Health and Safety considerations reducing the cost of process set up
- Low shrink temperature for fast installation
- Can be printed before installation to give component details
- RoHS/ELV compliant

Protection for Wire Bundles, Connectors, Terminals and Splices

Product Features

RPT-120 Tubing

- Operating temperature from -40°C up to +120°C
- Minimum full recovery temperature: 115°C
- 2:1 shrink ratio

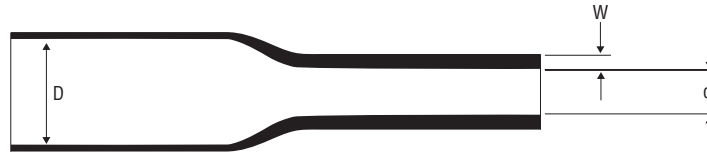


Product Dimensions

| Size | Inside Diameter | | Wall Thickness | Ordering Description |
|---------|---------------------------------|------------------------------------|---------------------------|----------------------|
| | D (min) Expanded as Supplied mm | d (max) Recovered after Heating mm | W (nom) Wall Thickness mm | |
| 19/6 | 19.0 | 6.0 | 1.0 | RPT-120-19/6-0 |
| 27/12.7 | 27.0 | 12.7 | 0.86 | RPT-120-27/12.7-0 |

Ordering Information

| Standard Colour | Black (0) | | | | |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|--------|----|---------|---------|
| Size Selection | Always order the largest size that will shrink snugly over the component to be covered. Special order sizes are available upon request. | | | | |
| Ordering Description | Specify product name, size and colour (for example RPT-120-19/6-0) | | | | |
| Specifications/Approvals | <table border="1"> <thead> <tr> <th>Series</th> <th>TE</th> </tr> </thead> <tbody> <tr> <td>RPT-120</td> <td>RK-6765</td> </tr> </tbody> </table> | Series | TE | RPT-120 | RK-6765 |
| Series | TE | | | | |
| RPT-120 | RK-6765 | | | | |



Operating Temperature Range



Shrinking Ratio



Shrink Temperature



Fluid Resistant

Engineering Notes

A large grid of graph paper for engineering notes, consisting of a uniform pattern of small squares covering the majority of the page.

Fluid Management


- Automotive Hose and Pipe Protection
- Fluid Line Protection
- Hose Coupling
- Cooling Hose Protection



Automotive Hose and Pipe Protection



AP-2000 Tubing
Cost-effective anti-noise, abrasion and corrosion protection for automotive brake and air-conditioning lines.

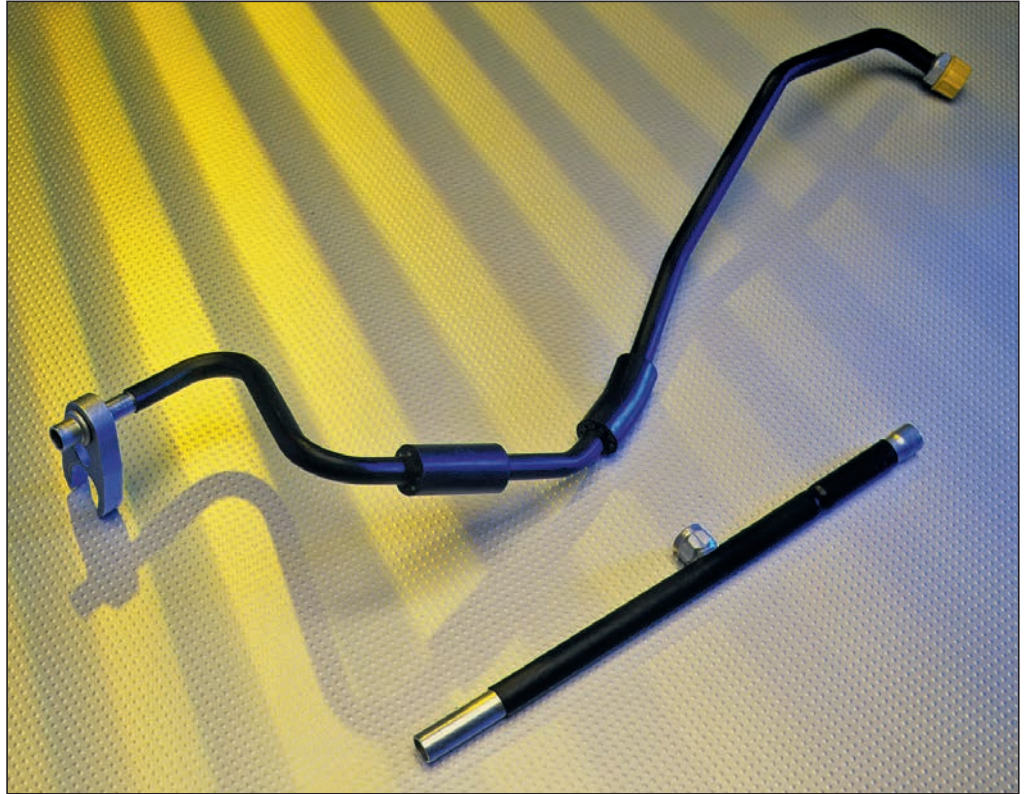

AP-2000 Tubing

AP-2000 is designed for use on industry standard metal pipes to provide protection on automotive brake and fuel lines in areas exposed to mechanical abuse and moisture. The product is positioned on straight pipe lengths prior to the second end-nut fitting.

Each size of AP-2000 tubing has been designed for use on specific standard size of metal pipe. The product rapidly shrinks on application of heat above 115 °C and the adhesive melts and flows around the substrate, eliminating air gaps.

Once installed, the pipes are bent and formed.

Benefits


- Adds protection only where it is needed – minimising costs compared to whole pipe dip-coats.
- One size fits a range of pipes minimising inventory costs.
- Easier, lower cost installation compared to dip-coat processes – simple heat-shrink process using hot air, convection or infrared equipment.
- Reduced production times – as pipes can be formed after heat-shrink tubing is installed.
- Moistureproof sealing – hot-melt adhesive flows between tubing and pipe, preventing any moisture from coming into contact with the pipe.
- RoHS/ELV compliant

Dual-Wall Polyolefin Heat-Shrinkable Tubing to Protect Automotive Metal Pipework

Product Features

AP-2000 Tubing

- Continuous operating temperature from -40°C up to +80°C
- Minimum shrink temperature: 110°C
- Minimum full recovery temperature: 115°C

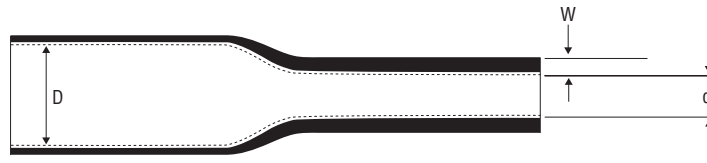

Product Dimensions


| Size | Standard Pipe Diameter mm | Wall Thickness | | Ordering Description |
|-------|---------------------------|-------------------------------------------------|------------------------------------|----------------------|
| | | Inside Diameter D (min) Expanded as Supplied mm | W (nom) Recovered after Heating mm | |
| 6 | 4.76 | 6.0 | 1.0 | AP2000-6 |
| 8 | 6.35 | 8.0 | 1.0 | AP2000-8 |
| 10 | 8.00 | 10.0 | 1.0 | AP2000-10 |
| 15 | 10.00 | 15.0 | 1.0 | AP2000-15 |
| NR101 | 4.85 | 14.0 | 1.0 | AP2000-NR101 |
| NR102 | 3.50 | 5.0 | 1.0 | AP2000-NR102 |

The size that corresponds to the pipe diameter shown in the table above should be ordered. Contact TE Automotive for non-standard pipe diameters.


The product may be supplied in cut pieces and spools for long continuous lengths or high volumes.

Ordering Information

| Standard Colour | Black (0) | | | | |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|--------|----|----------------|---------|
| Size Selection | Always order the largest size that will shrink snugly over the component to be covered. Special order sizes are available upon request. | | | | |
| Ordering Description | Specify product name, size and colour (for example AP-2000-6-0) | | | | |
| Specifications/Approvals | <table border="1"> <thead> <tr> <th>Series</th> <th>TE</th> </tr> </thead> <tbody> <tr> <td>AP-2000 Tubing</td> <td>RW-1001</td> </tr> </tbody> </table> | Series | TE | AP-2000 Tubing | RW-1001 |
| Series | TE | | | | |
| AP-2000 Tubing | RW-1001 | | | | |



Operating Temperature Range



Shrink Temperature




Fluid Resistant

Automotive Hose and Pipe Protection



ATUM Tubing
High shrink ratio
adhesive lined
polyolefin tubing.

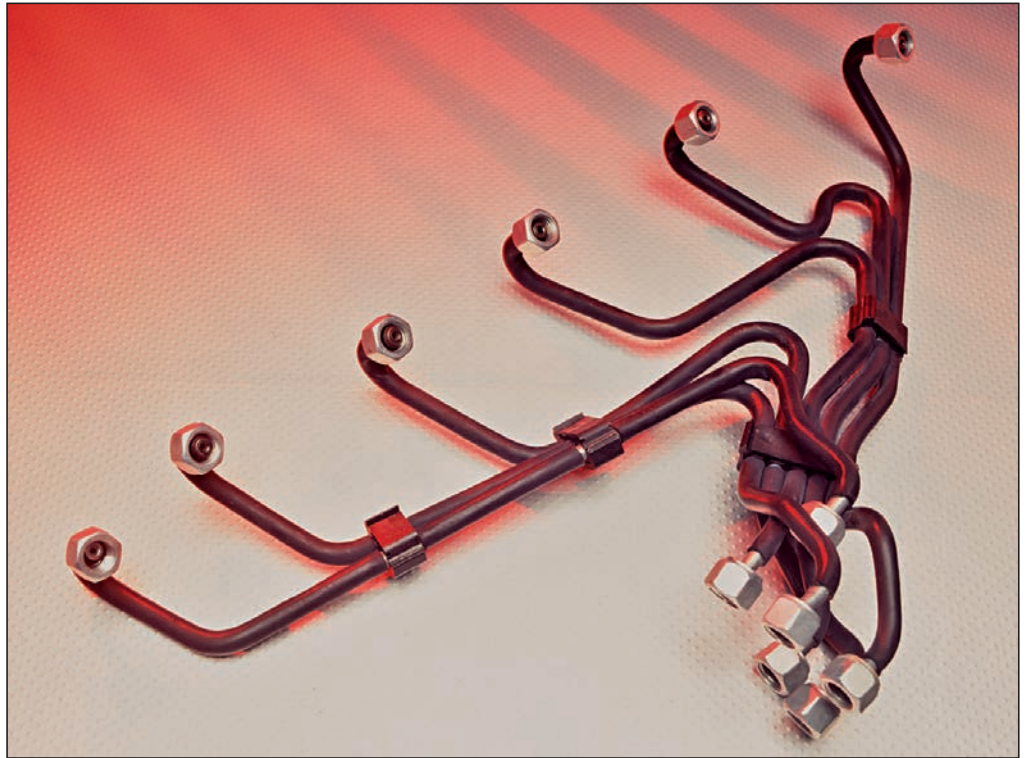

ATUM Tubing

Semi-flexible, heat-shrinkable tubing with a meltable adhesive inner lining designed to provide moisture proof sealing to a wide range of substrates such as electrical wire splices, cable jackets, wire breakouts and electrical components.

The high shrink ratios mean that only seven sizes are required to cover a wide range of substrate diameters. Typical applications are environmental sealing of electrical components including wire splices and harness breakouts as well as sealing cable ends against moisture ingress.

Benefits


- Easier, lower cost installation compared to dip-coat processes – simply slide over substrate and shrink using hot air, convection or infrared equipment.
- Reduced production times – tubes can be bent or formed on the pipe.
- Moisture proof sealing – hot-melt adhesive flows between tubing and substrate to provide a permanent waterproof bond.
- Application versatility – one size of tubing fits a range of substrate diameters minimizing inventory costs.
- RoHS/ELV compliant

Automotive Hose and Pipe Protection

Product Features

ATUM Tubing

- Continuous operating temperature from -55°C up to +110°C
- Minimum shrink temperature: 80°C
- Minimum full recovery temperature: 110°C
- 3:1 and 4:1 shrink ratio

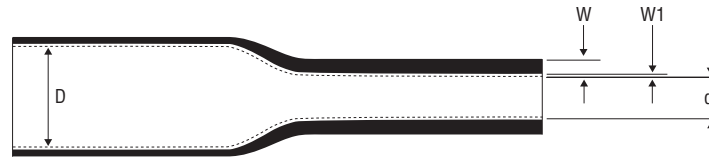


Product Dimensions

| Inside Diameter | | Wall Thickness | | | | Ordering Description | | | |
|------------------------------|---------------------------------|--------------------------------------------|----|------------------------------------------------|------|----------------------|-----|------------------------|------------------------|
| D (min) Expanded as Supplied | d (max) Recovered after Heating | W (nom) Total Wall Recovered after Heating | | W1 (nom) Meltable Wall Recovered after Heating | | 3:1 | 4:1 | | |
| mm | mm | mm | mm | mm | mm | | | | |
| 3 | 4 | 1 | 1 | 1.00 | 1.00 | 0.5 | 0.5 | Atum-3/1-colour code | Atum-4/1-colour code |
| 6 | 8 | 2 | 2 | 1.00 | 1.00 | 0.5 | 0.5 | Atum-6/2-colour code | Atum-8/2-colour code |
| 9 | 12 | 3 | 3 | 1.40 | 1.40 | 0.6 | 0.6 | Atum-9/3-colour code | Atum-12/3-colour code |
| 12 | 16 | 4 | 4 | 1.78 | 1.78 | 0.7 | 0.7 | Atum-12/4-colour code | Atum-16/4-colour code |
| 19 | 24 | 6 | 6 | 2.25 | 2.25 | 0.8 | 0.8 | Atum-19/6-colour code | Atum-24/6-colour code |
| 24 | 32 | 8 | 8 | 2.54 | 2.54 | 1.0 | 1.0 | Atum-24/8-colour code | Atum-32/8-colour code |
| 40 | 52 | 13 | 13 | 2.54 | 2.54 | 1.0 | 1.0 | Atum-40/13-colour code | Atum-52/13-colour code |

Ordering Information

| | | |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|
| Standard Colours | Black (0) | Clear (X) |
| Size Selection | Always order the largest size that will shrink snugly over the component to be covered. Special order sizes are available upon request. | |
| Ordering Description | Specify product name, size and colour (for example ATUM-12/3-colour) | |
| Specifications/Approvals | Series ATUM | UL E85381, 600 V, 110°C |
| | | TE RW-2063 (black) RK-6024 (colours and clear) |



Operating Temperature Range



Shrinking Ratio



Shrink Temperature



Flame Retarded (black/colours only)



Fluid Resistant



Underwriters Laboratories

Automotive Hose and Pipe Protection



DWTC Tubing

Flexible, dual wall moisture proof heat shrinkable tubing.



DWTC Tubing

Flexible, heat-shrinkable, dual-wall tubing with an integrally bonded meltable adhesive inner liner designed to offer moisture proof encapsulation to a wide variety of substrates. Available in black and clear, clear version of DWTC offers excellent clarity for protection of substrates that may need to be inspected during service.

The tough outer jacket gives excellent mechanical strength with a high resistance to splitting. The high shrinkage ratio means that only four sizes are needed to give protection to a full range of irregular shapes with widely varying dimensions.

Benefits


- Adds protection only where it is needed – minimizing costs compared to whole pipe coating.
- Greater versatility – can be over-expanded to allow over end fitting.
- Easier, lower cost installation compared to dip-coat processes – simple heat-shrink process using hot air, convection or infrared equipment.
- Reduced production times – heat-shrink tubing can be installed on a straight pipe before it is formed to make a cluster.
- Moisture proof sealing – hot-melt adhesive flows between tubing and pipe, preventing any moisture from coming into contact with the pipe.
- RoHS/ELV compliant

Automotive Hose and Pipe Protection

Product Features

DWTC Tubing

- Continuous operating temperature from -55°C up to +75°C
- Minimum shrink temperature: 60°C
- Minimum full recovery temperature: 100°C
- 4:1 shrink ratio

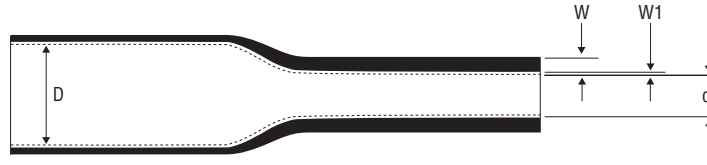


Product Dimensions

| Size | Inside Diameter | | Wall Thickness | | Ordering Description |
|------|---------------------------------|------------------------------------|-----------------------------------------------|----------------------------------------------------|----------------------|
| | D (min) Expanded as Supplied mm | d (max) Recovered after Heating mm | W (nom) Total Wall Recovered after Heating mm | W1 (nom) Melttable Wall Recovered after Heating mm | |
| 4/1 | 4.0 | 1.0 | 0.8 | 0.25 | DWTC-4/1-X |
| 8/2 | 8.0 | 2.0 | 0.9 | 0.25 | DWTC-8/2-X |
| 12/3 | 12.0 | 3.0 | 1.2 | 0.40 | DWTC-12/3-X |
| 16/4 | 16.0 | 4.0 | 1.5 | 0.50 | DWTC-16/4-X |

The largest size that will recover snugly over the component to be covered should be ordered. The wall thickness of the tubing will be less than specified if recovery is restricted during shrinkage. Other lengths and sizes are available subject to special order.

Ordering Information

| Standard Colour | Clear (X) | | | | |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|--------|----|------|---------|
| Size Selection | Always order the largest size that will shrink snugly over the component to be covered. Special order sizes are available upon request. | | | | |
| Ordering Description | Specify product name, size and colour (for example DWTC-4/1-X) | | | | |
| Specifications/Approvals | <table border="1"> <thead> <tr> <th>Series</th> <th>TE</th> </tr> </thead> <tbody> <tr> <td>DWTC</td> <td>RK-6204</td> </tr> </tbody> </table> | Series | TE | DWTC | RK-6204 |
| Series | TE | | | | |
| DWTC | RK-6204 | | | | |



Operating Temperature Range



Shrinking Ratio



Shrink Temperature




Fluid Resistant

Veratile Protection Coverings for Automotive Components



HFT 5000 Tubing
Heat shrinkable
abrasion resistant
woven fabric tube.

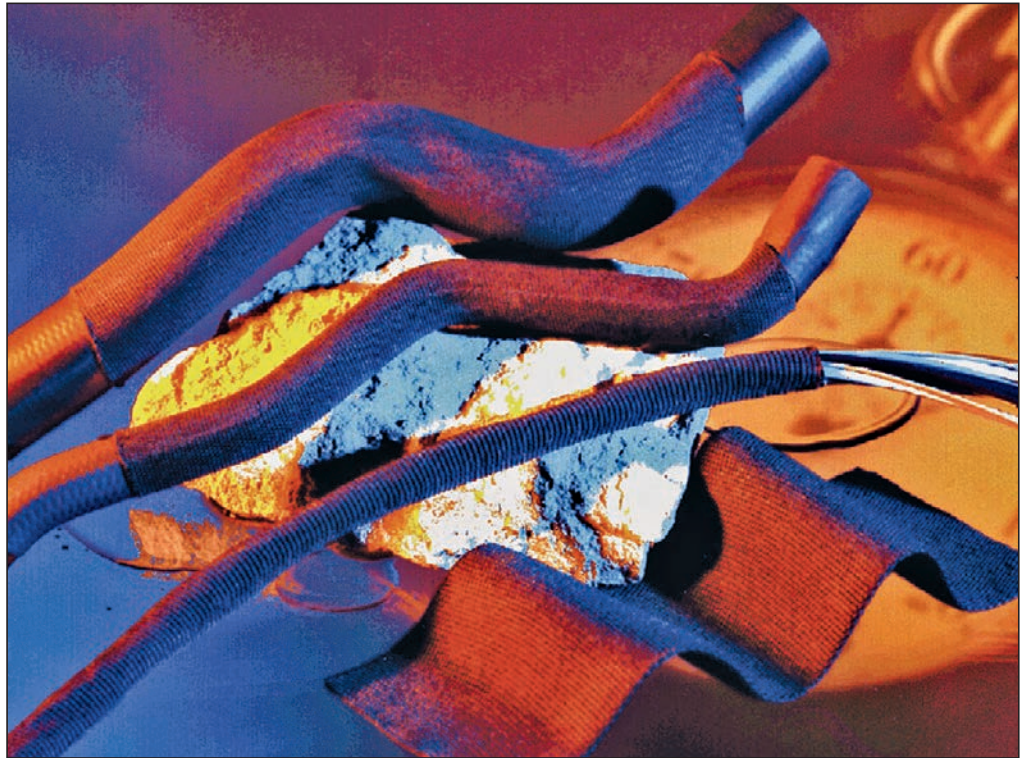

HFT 5000 Tubing

HFT 5000 tubing products are made of very flexible heat-shrinkable fabric material, they shrink and fit snugly and securely around the underlying substrate.

Designed primarily to provide mechanical abrasion protection for components such as rubber hoses, plastic pipes, and harness wiring bundles, they are also suitable for other applications, such as noise and rattle suppression.

The woven construction makes HFT 5000 extremely flexible and resistant to trapping water, heat and humidity. It provides outstanding abrasion, chafing and cutting protection, even at high temperatures. HFT-5000 product is easy to install and can be cut with standard industrial cutting equipment.

Benefits


- Extremely tough – meeting even demanding automotive abrasion specifications
- Protect only where protection is needed – minimising cost
- Safe installation with no hot knife cutting equipment required – reduces investment
- Soft to handle so operators do not need to wear gloves – increases productivity
- Can be cut with conventional guillotines or even scissors
- Resists hose pulsing effects
- Halogen free
- Resistant to harsh environments such as engine compartments
- Grips substrates tightly without additional fixing
- Highly flexible woven fabric construction for easy installation onto awkward substrates such as tightly angled hoses
- RoHS/ELV compliant

Heat-Shrinkable Fabric Tubing

Product Features

HFT 5000 Tubing

- Continuous operating temperature from
-40°C up to +125°C (3000 hrs)
-40°C up to +150°C (1000 hrs)
- Minimum shrink temperature: 80°C
- Minimum full recovery temperature: 110°C
- Low shrink temperature
- 2:1 shrink ratio

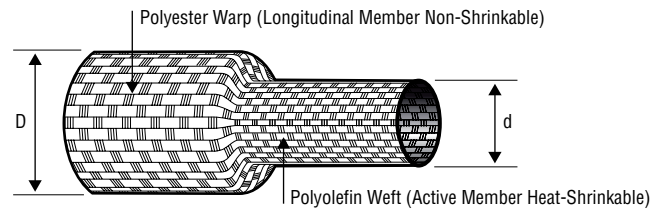

Product Dimensions

Standard Sizes

Inside Diameter

| D (min) Expanded as Supplied mm | d (max) Recovered after Heating mm | Ordering Description |
|---------------------------------|------------------------------------|----------------------|
| 12 | 6 | HFT-5000-12/6-0 |
| 20 | 10 | HFT-5000-20/10-0 |
| 25 | 12 | HFT-5000-25/12-0 |
| 30 | 15 | HFT-5000-30/15-0 |
| 34 | 17 | HFT-5000-34/17-0 |
| 40 | 20 | HFT-5000-40/20-0 |
| 50 | 25 | HFT-5000-50/25-0 |
| 60 | 30 | HFT-5000-60/30-0 |
| 70 | 35 | HFT-5000-70/35-0 |
| 80 | 40 | HFT-5000-80/40-0 |
| 100 | 50 | HFT-5000-100/50-0 |

Ordering Information

Standard Colour

Black (0)

Note: Fully recoverable fabric wall thickness: Approximately 1 mm.
Longitudinal change on full recovery is -10% to -20%; 0 = Black

For full product performance details consult TE Automotive Specifications RW-2060.

Specifications/Approvals

Series


TE

HFT 5000 Tubing

RW-2060

Material Safety Data Sheet available on request.

Installation instructions available on request.



Operating Temperature Range



Shrinking Ratio



Shrink Temperature



Fluid Resistant

Automotive Hose and Pipe Protection



RPT-120 Tubing
Thin-wall tubing,
conforms and protects
substrates as a
cost-effective alternative
solution to paint.



RPT-120 Tubing

This resilient tubing offers an alternative to paint, particularly suitable for round substrates. It provides excellent mechanical and corrosion protection compared to paint and the high quality surface creates a quality image for the component being protected.

Product Features

RPT-120 Tubing

- Provides a tough resilient layer to protect the component beneath
- Easy to install with conventional heating equipment
- Low cost of set up

Benefits


- Provides a resilient layer protecting the component beneath from damage and corrosion
- Good surface finish giving a professional look to the final product
- Less taxing Health and Safety considerations reducing the cost of process set up
- Low shrink temperature for fast installation
- Can be printed before installation to give component details

Protection for Wire Bundles, Connectors, Terminals and Splices

Product Features

RPT-120 Tubing

- Operating temperature from -40°C up to +120°C
- Minimum full recovery temperature: 115°C
- 2:1 shrink ratio

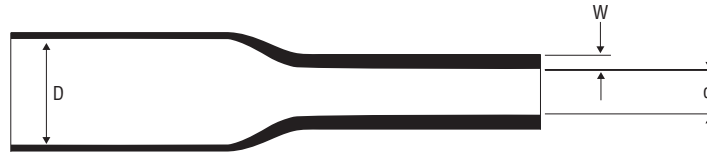


Product Dimensions

| Size | Inside Diameter | | Wall Thickness | | Ordering Description |
|---------|---------------------------------|------------------------------------|---------------------------|--|----------------------|
| | D (min) Expanded as Supplied mm | d (max) Recovered after Heating mm | W (nom) Wall Thickness mm | | |
| 19/6 | 19.0 | 6.0 | 1.00 | | RPT-120-19/6-0 |
| 27/12.7 | 27.0 | 12.7 | 0.86 | | RPT-120-27/12.7-0 |

Ordering Information

| Standard Colour | Black (0) | | | | |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|--------|----|---------|---------|
| Size Selection | Always order the largest size that will shrink snugly over the component to be covered. Special order sizes are available upon request. | | | | |
| Ordering Description | Specify product name, size and colour (for example RPT-120-19/6-0) | | | | |
| Specifications/Approvals | <table border="1"> <thead> <tr> <th>Series</th> <th>TE</th> </tr> </thead> <tbody> <tr> <td>RPT-120</td> <td>RK-6765</td> </tr> </tbody> </table> | Series | TE | RPT-120 | RK-6765 |
| Series | TE | | | | |
| RPT-120 | RK-6765 | | | | |



Operating Temperature Range



Shrinking Ratio



Shrink Temperature



Fluid Resistant

Protection for Wire Bundles, Connectors, Terminals



TECT Tubing

Semi-conductive, dual wall, moisture proof heat shrinkable tubing.



TECT Tubing

TECT is a dual wall semi-conductive heat shrinkable tubing designed to allow electrical grounding of coated fuel lines.

A portion of the protective coating on the fuel line is removed exposing the bare metal core. The TECT is recovered down over the exposed metal giving an electrical grounding point whilst resealing the coated fuel line from the environment.

Benefits


- Semi-conductive
- Environmentally sealed
- Simple to install
- RoHS/ELV compliant

Protection for Wire Bundles, Connectors, Terminals and Splices

Product Features

TECT Tubing

- Operating temperature from -40°C up to +120°C
- Minimum full recovery temperature: 120°C
- 2:1 shrink ratio (minimum)

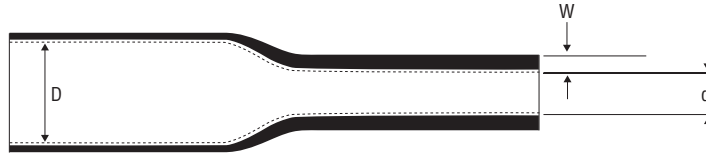



Product Dimensions

| Inside Diameter | | Wall Thickness | | | Cut Length (nom) mm | Ordering Description |
|---------------------|----------------------------|------------------------|-----------------------------|----|---------------------|----------------------|
| D Diameter (min) mm | d Jacket Diameter (max) mm | W Jacket Wall (min) mm | Jacket and Liner L (min) mm | | | |
| 13.5 | 5.0 | 1.0 | 1.25 | 30 | TECT-13.5/4.5-0-XX | |
| 16.0 | 8.0 | 1.0 | 1.25 | 30 | TECT-16/8-0-XX | |

The wall thickness of the tubing will be less than specified if recovery is restricted during shrinkage. Dimension L (Jacket and Liner) value is for reference only.

Ordering Information

| Standard Colour | Black (0) | | | | |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|--------|----|------|---------|
| Size Selection | Always order the largest size that will shrink snugly over the component to be covered. Special order sizes are available upon request. | | | | |
| Ordering Description | Specify product name, size and colour (for example TECT-13.5/4.5-0) | | | | |
| Specifications/Approvals | <table border="1"> <thead> <tr> <th>Series</th> <th>TE</th> </tr> </thead> <tbody> <tr> <td>TECT</td> <td>RW-2080</td> </tr> </tbody> </table> | Series | TE | TECT | RW-2080 |
| Series | TE | | | | |
| TECT | RW-2080 | | | | |



Engineering Notes

A large grid of graph paper for engineering notes, consisting of a uniform pattern of small squares covering the majority of the page.

Introduction

Application Equipment

- TE Application Tooling provides a comprehensive portfolio of tooling and equipment. Some of it is designed and engineered specifically for its installation of TE Connectivity's Raychem heat-shrinkable products.
- Designed for general Industry use or developed specifically in close collaboration with customers, using standard heater components.
- This equipment provides the optimal heating temperatures, performance, and control features for maximum production efficiency.



Splice Sealing and Connector Sealing Evaluation – Various Products



**AD-3050-
SEAL-TEST-EQUIP**



Applications

The AD-3050-SEAL-TEST-EQUIP is a manually operated pneumatic device, intended for use as a convenient 'in-process' sampling technique for checking sealed splices. Different combinations of in-line or stub splices can be pressure tested in any of the combination of fixtures (8 in total). There is also a facility to allow leak testing of various connectors.

TE Raychem business line of TE Application Tooling has seen good correlation between results obtained with the AD-3050 and those obtained through water immersion testing. However, testing in accordance with the OEM specification is the only guaranteed way of confirming that the OEM spec is being met. The splice products are located in clamps which deliver the test pressure. The product is immersed in water and pressure is delivered down the wire(s) to the sealed area. The test result is determined visually by looking for bubbles in the area of the sealing product.

Use of this equipment is described in TE Connectivity Raychem procedure, reference No. PIP/017/95. This equipment does not check for poke through i.e. where individual wire strands poke through the installed heat-shrinkable sleeve. Poke through is eliminated by ensuring correct welding and subsequent handling conditions.

Features and Benefits

- Simple fixture design allows fast sealing test result assisting determination of installation conditions for splice sealing products.
- Connector fixture adapter allows connector sealing verification.
- Optional strong portable container allows use in various locations.
- Poke through indicator option available as an accessory.

Splice Sealing and Connector Sealing Evaluation – Various Products

Technical Specification

AD-3050-SEAL-TEST-EQ-NC

| | |
|---------------------------------------|------------------------------------------------------------------------------------------------------|
| Pneumatic Supply | 6 bar maximum, filtered supply. 2 bar test pressure maximum. (Test pressure typically 0.5 bar) |
| Machine Cycle Times for Seal Testing: | Typically 1 minute. |
| Total System Noise: | Negligible noise from air test |
| Dimensions: | 550 mm x 350 mm x 215 mm (Excludes packing case) |
| Weight: | 4 kg |

Ordering Information

| | Description | Part Number (PCN) |
|---------------------|-------------------------|--------------------------|
| Seal Test Equipment | AD-3050-SEAL-TEST-EQ-NC | C82893-000 |

Accessories

| | Description | Part Number (PCN) |
|-------------------------------|------------------------|--------------------------|
| Tool Case | AD-3050-SEAL-CASE-ONLY | F66989-000 |
| Splice Poke-Through Indicator | AD-3050-SEAL-POKE-IND | E63259-000 |

Recommended Spares

| | Description | Part Number (PCN) |
|--------------------------------|----------------------------------------------------------|--------------------------|
| Set of 8 Seals** | AD-3050-SEAL-8-KIT | 299155-000 |
| Clamp Assembly including Seals | AD-3050-SEAL-CLAMP-ASSY | 168927-000 |
| Sealing Tape | EPDM foam, 6 mm x 9 mm, with acrylic adhesive backing | |

**) Full set of seals.

As the equipment is designed to use readily available pneumatic components, these are listed on the parts list which is included with the equipment.

Heavy-Duty Hot-Air Heating Tools



CV-1981, CV-1983
Heating Tools



Applications

Used for installing dual or single-wall tubing up to three inches in diameter and for installing SolderSleeve devices. Closed loop version (PID) also available.

Features and Benefits

- Robust, double-insulated, heavy-duty unit
- Highest-wattage unit (1600–2260 watts)
- Integral stand that allows use as a bench tool
- Safe, quiet operation
- Variety of reflectors available
- Easy fixturing for dual opposing heating

Product Range

All dual-wall, single-wall tubing and moulded part products.
Various SolderSleeve devices products.
For other TE Connectivity's Raychem products discuss with Product Management.

Heavy-Duty Hot-Air Heating Tools

| Technical Specification | CV-1981-MK2 | CV-1983 | CV-1981 PID |
|-------------------------|------------------|------------------|------------------|
| Electrical Supply | 120 V and 230 V | 120 V and 230 V | 120 V and 230 V |
| Power Consumption | 1600 W | 2260 W/3060 W | 1600 W |
| Total System Noise | 65dB | 65dB | >70dB |
| Length | 340 mm (13") | 320 mm (13") | 350 mm (13") |
| Weight | 1.3 kg (2.90 lb) | 1.5 kg (3.30 lb) | 1.4 kg (3.10 lb) |
| Air Flow | Max 230 l/min | Max 500 l/min | 230 l/min |

Ordering Information

| Equipment | Description | Part Number | Voltage | Hz |
|------------------------|--------------------------|-------------|---------|----------|
| CV-1981-MK2 | CV-1981-120V1600W-CANMK2 | A42716-000 | 120 V | 50/60 Hz |
| | CV-1981-120V1600W-UKMK2 | E95798-000 | 120 V | 50/60 Hz |
| | CV-1981-230V1600W-MK2 | 813914-000 | 230 V | 50/60 Hz |
| | CV-1981-230V1600W-UKMK2 | 340970-000 | 230 V | 50/60 Hz |
| CV-1983 | CV-1983-110V-2260W-UK | 441753-000 | 120 V | 50/60 Hz |
| | CV-1983-220V-2260W | 773898-000 | 230 V | 50/60 Hz |
| | CV-1983-220V-2260W-UK | 985426-000 | 230 V | 50/60 Hz |
| | CV-1983-220V-3060W | 538361-000 | 230 V | 50/60 Hz |
| | CV-1983-220V-3060W-UK | 231866-000 | 230 V | 50/60 Hz |
| CV-1981-PID | CV-1981-AT-1600W-120V-US | CV1218-000 | 120 V | 50/60 Hz |
| | CV-1981-AT-1600W-120V-UK | CV1219-000 | 120 V | 50/60 Hz |
| | CV-1981-AT-1600W-230V-EU | CV1217-000 | 230 V | 50/60 Hz |
| | CV-1981-AT-1600W-230V-UK | CV-1220-000 | 230 V | 50/60 Hz |
| CV-1983 Barrel Adapter | AD-1962 | 989172-000 | | |

| Accessories | Description | Application | Part Number |
|-------------|------------------|------------------------------------------------------------------------------|-------------|
| | PR-12 reflector | Tubing: 6.3–25.4 mm (0.25"–1") | 991973-000 |
| | PR-13 reflector | Tubing: Up to 6 mm (0.25") | 991963-000 |
| | PR-13C reflector | Large SolderSleeve products | 991974-000 |
| | PR-21 reflector | Tubing: Up to 25.4 mm (1") | 991984-000 |
| | PR-24 reflector | Tubing/moulded parts: 25.4 –34.93 mm (1"–1.38") | 991964-000 |
| | PR-24A reflector | Tubing/moulded parts: 34.93–60.33 mm (1.38"–2.38") | 991989-000 |
| | PR-25 reflector | SolderSleeve products: Up to 7 mm (0.28") | 991965-000 |
| | PR-25D reflector | SolderSleeve products: 6.3–12.7 mm (0.25"–0.50") | 989523-000 |
| | PR-26 reflector | Small SolderSleeve products: | 991967-000 |
| | PR-33 reflector | SolderSleeve products: 19.05–25.4 mm (0.75"–1") | 997768-000 |
| | AD-1962 adapter | Adaptor for larger-barrel CV-1983 | 989172-000 |
| | PR-34 reflector | SolderSleeve products: 12.0–20.0 mm (0.47"–0.79") | 989111-000 |
| | PR-51 | Special narrow reflector for moulded part transitions (21.5 x 3.5 mm nozzle) | 113069-000 |

Users should independently evaluate the suitability of the product for their application. Before ordering check with factory for most current data.

On-Board Stub- and Inline-Splice Sealing



CV-OBHAT-1600W System



Applications

The CV-OBHAT system is a lightweight, portable hot air tool, used to install TE Connectivity's Raychem ES-CAP Stub and Inline Splice Sealing products. The CV-OBHAT tool has been designed for use on-board with minimum board fixtures. Wire support and cap location fixtures are an integral part of the CV-OBHAT tool, hence only a simple board mounting/location post is required on the board. If suitably mounted the CV-OBHAT tool can be used off-board. The hot air pistol and control box are connected by a 6 m umbilical.

Loading and unloading product is made simple by the use of a hinged narrow reflector, which also minimizes air spillage and potential damage to wires during the heating cycle.

The CV-OBHAT tool utilises a closed loop temperature control system with a function, which disables the timing of the heat cycle until a pre-set temperature is achieved. By this method the effect of ambient temperatures and varying cycle duties can be minimised to ensure high quality, sealed installations. The tool is designed to have a heating and cooling segment to each installation cycle. The cooling segment produces cooled product that is safe and easy to handle as well as being mechanically strong at the end of an installation cycle. For an In-line Splice Sealing variant contact Product Management.

Features and Benefits

- Capable of producing sealed splices on-board
- Wire support and cap holding fixtures integral part of pistol
- Small footprint on harness board
- Lightweight pistol connected to controller with 6 m umbilical
- Audible signal at end of installation cycle
- Control system incorporating audible and visual process safety alarms
- Programable heat cycle start temperature
- Optional board locking capability

On-Board Stub-Splice and Inline-Splice Sealing

| Technical Specification | CV-OBHAT | |
|---------------------------------------|-------------------------------------------------------------------------------|--|
| Electrical supply | 220/240 V – 50 Hz Single Phase | |
| Current maximum load | 7 Amps | |
| Compressed air supply | 400 kPa / 4 bar minimum | |
| Programable heat cycle timer | 0–99.9 seconds | |
| Programable cool cycle timer | 0–99.9 seconds from end of heat cycle | |
| Programable cap cooling fixture timer | 0–99.9 seconds from end of heat cycle | |
| Programable board locking timer | 0–99.9 seconds from end of heat cycle (board locking on during heat cycle) | |
| Operating temperature | Recommended 500 °C | |
| Dimensions | 380 mm x 300 mm x 180 mm – Control box | |
| Weight | 15 kg – complete system – (Control box + Pistol + Umbilical) | |
| Umbilical length | 6 m | |


| Product Range | TE Connectivity's Raychem ES Caps/ RBK-ILS tubes/RBK-VWS tubes/ QSZH tubes | Sizes 1 & 2 (Typical heat time 15 s + 30 s cooling) For size 3 contact Product Management |
|---------------|----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
|---------------|----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|

| Ordering Information | Stub-Splice Variant | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|------------|
| | CV-OBHAT base unit: | CH3712-000 |
| | CV-OBHAT-COOL-FIXASSY: | 775072-000 |
| | CV-OBHAT-SIL-ARM-GRIP: | CH3711-000 |
| | Alternatively | |
| | CV-OBHAT-MECH-GRIPPER: | C58553-000 |
| Inline-Splice Variant: | | |
| | CV-OBHAT base unit: | CH3712-000 |
| | 2 x CV-OBHAT-SIL-ARM-GRIP: | CH3711-000 |
| | Alternatively | |
| | 2 x CV-OBHAT-MECH-GRIPPER: C58553-000220/240 V – 50 Hz Single Phase | |
| Users should independently evaluate the suitability of the product for their application. Before ordering check with your TE Application Tooling representative. | | |

Twin Workstation Heater for Multiple Installation of Short Length Tubing Products



IR-1891 Shuttle Machine

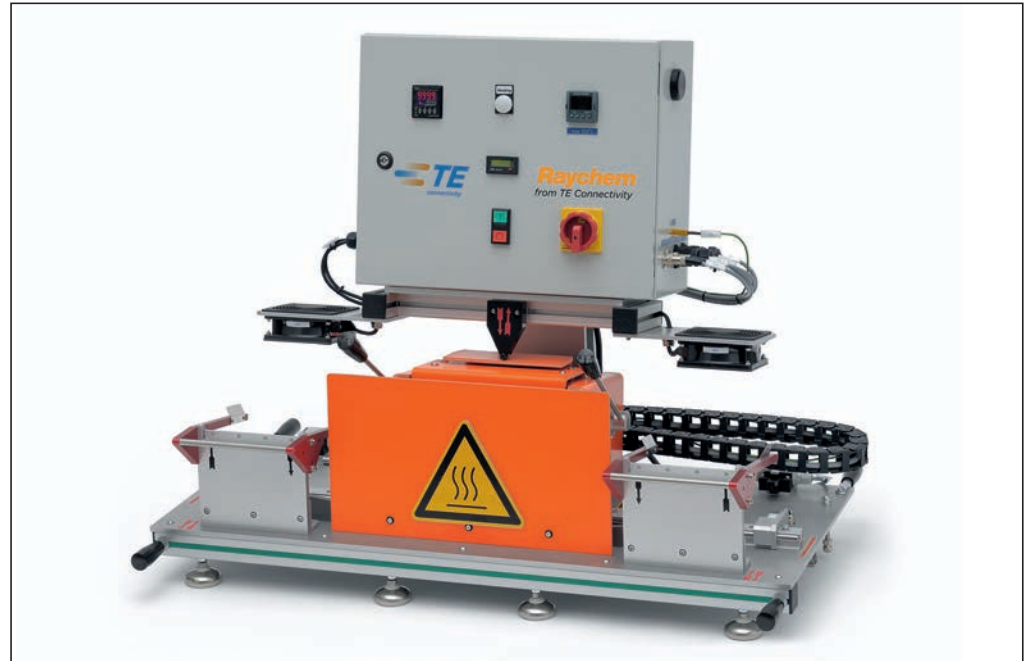

Applications

The IR-1891 is suitable for the installation of a range of TE Connectivity's Raychem heat-shrinkable tubing products onto a variety of small components, e.g. ring terminals, faston terminals and small connectors etc. The machine is provided with two work stations and a moveable heating head.

Each workstation is provided with supports for tooling fixtures (which must be specified and ordered separately). These support the workpieces and locate the tubing products. The operator loads the workpieces into the fixtures at one of the workstations, ensures that the tubing product is correctly positioned and then slides the heat head into position before initiating the heating cycle. The operator then continues with loading / unloading the other work station whilst the heating cycle is taking place.

The IR-1891-220V-Shuttle-Retrn is provided with closed loop temperature control and in addition the heat head is 'locked' into position by use of an electromagnet during the heating cycle.

Once the other workstation has been loaded and the first installation is complete the heat head is moved into position over the product and the next heating cycle initiated. Heating times vary typically from 3 to 30 seconds depending on the size and type of tubing product. Process rates up to 1200 pieces/hour can be achieved depending on the heating time and the time taken by the operator to load and unload the workpieces. The installation temperature/power can be varied acc. to product type/size and required cycle times.

The heating elements, which are continuously energized, are of the infra-red medium wave length type and consist of a coiled resistance wire contained in quartz glass tubes. The closed loop temperature control uses similar elements but having integral thermocouple sensors.

Features and Benefits

- Automatic cycle start once heater is manually positioned over product, which gives improved process control (recommended for adhesive lined heat-shrinkable tubing e.g. sealing applications).
- Automatic heating head retraction at end of cycle prevents damage to components.
- Multiple product fixture assemblies give increased process rates.
- Cooling fan above each fixture assembly maintains holding fixture at an acceptable temperature.

Twin Workstation Heater for Multiple Installation of Short Length Tubing Products

| Technical Specification | IR-1891 Shuttle Machine | |
|--------------------------------------|---------------------------------------------------------|--|
| Electrical Supply | 230 V Single Phase | |
| Power Consumption | 1600 W | |
| Operating Temperature | 500 °C max | |
| Process Rate | 1200/hour maximum depending on application and operator | |
| Heating Times | 3 to 20 seconds depending on application | |
| System Noise | < 70 dB | |
| Dimensions – 613148-000 / 289588-000 | L1100 mm x H900 mm x D500mm (L43" x H35" x D20") | |
| Base Plate Dimensions 289588-000 | L1040 mm x D450 mm (L41" x D18") | |
| Base Plate Dimensions 613148-000 | L1040 mm x D397 mm (L41" x D16") | |

| Product Range |
|------------------------------------------------------------------------------------------------------------------------|
| Wide range of TE Connectivity's Raychem tubing products such as all dual wall tubings, single wall tubings and ES-Caps |
| Maximum diameter 20 mm (0.8") and maximum length 60 mm (2") |

| Ordering Information | Description | Part Number |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| | IR-1891-230V-Shuttle-Retrn | 528018-1 |
| | IR-1891-220V-Retrn-Syl | |
| | Note: The descriptions given here do not include the supply of the necessary tooling fixtures. These are designed for each individual application. | |
| | The IR-1891 Shuttle Machine is also available as an extra cooling and fixation version. Ordering information upon request. | |
| | A range of tooling fixtures designed for previous applications are available. Please contact your TE Application Tooling representative for details. | |
| | Users should independently evaluate the suitability of the product for their application. Before ordering check with factory for most current data. | |

Conveyor Heater for Processing Raychem Heat-Shrinkable Tubing and Terminating Devices



Model 19
Conveyor Heater



Applications

The Model 19 conveyor heater is the latest generation of reliable and versatile process heaters for a wide variety of heat-shrinkable products. Two sets of timing belts grip the individual assemblies and carry them through a closed-loop infrared heating zone, then through a cooling zone, and deposit the completed assemblies in a collection bin. The processor was designed to meet the requirements of the European Safety Directives and is CE approved, allowing for worldwide use. The processor is designed to operate on the following line voltages: 210 to 240 Vac, 20 A, 1 Ø, 50/60 Hz.

Options for this processor include:

- Powered or unpowered extension tables to support long or heavy harnesses.
- Kit for processing ring terminals and end terminations.
- Floor stand with wheels.
- Wider heating elements for tubing up to 178 mm (7") long.
- Narrow heating elements for SolderSleeve devices up to 10 mm (0.4") diameter and 45 mm (1.8") long or short length tubing less than 50 mm (2").

Features and Benefits

- Closed-loop speed and temperature control.
- CE approved for worldwide use.
- Adaptable for different applications.
- Continuous controlled process.

Conveyor Heater for Processing Raychem Heat-Shrinkable Tubing and Terminating Devices

Product Features

Controlled Heating Zone: The Model 19 has two etched-foil heating elements mounted under a quartz face. Consistent heating chamber temperatures are obtained with a closed-loop temperature controller. There is a lockout on the controller to prevent unauthorized changes.

Speed Control: Consistent speed is obtained with a closed-loop speed controller. The speed is adjusted using a 3-digit thumbwheel on the front control panel. There is a lockout on the thumbwheel to prevent unauthorized changes.

Minimal Skill Requirements: There are clearly marked guides for aligning the assembly as well as the tubing or device being processed. The operator only has to center the assembly; the grippers carry it through the heating and cooling zone and deposit it into the unloading bin.

Economical Production: The throughput rate is determined by the rate at which an operator can load the processor.

Versatility: The tool description CLTEQ-M19-BELT-HTR part number 714529-000 will handle tubing up to 25 mm (1") diameter and 102 mm (4") long. Tubing up to 178 mm (7") long can be handled with the use of tool description CLTEQ-M19-BELT-HTR-6IN part number 075131-000. The tool description CLTEQ-M19-BELTHEATER-SS part number D43037-000 will handle SolderSleeve devices up to 10 mm (0.4") diameter and 45 mm (1.8") long or short length tubing (less than 50 mm (2")), where applications require a narrow heat width.

Self-Diagnostic Circuitry: There are several "self-diagnostic" circuits that alert the operator if any major component fails or if an unsafe processing condition occurs. A light will turn on and a lockout gate will lift in the entry zone, preventing the operator from loading assemblies until the situation has been corrected.

Other Features include:

- Emergency stop.
- Automatic cool-down circuit to extend the life of components.
- Lockout on temperature and speed controllers to prevent unauthorized changes.

Technical Specification

Model 19 Conveyor Heater

Electrical

| | |
|--------------------|------------------------------------------------|
| Power requirements | 210–240 Vac, 20 A, 1 ∅, 50/60 Hz |
| Heating elements | Std = 3160 W / Wide = 3320 W / Narrow = 1760 W |

Mechanical

| | |
|----------------------------|--------------------------------------------------|
| Conveyor belt system | Double-sided timing belts, 0.375" pitch – 9.5 mm |
| Belt speed | Up to 152 cm/min (5.0 ft/min or 59.8"/min) |
| Processor dimensions | 53 cm (21") W, 135 cm (53") L, 45 cm (18") H |
| Shipping dimensions | 66 cm (26") W, 147 cm (58") L, 58 cm (23") H |
| Shipping weight with crate | 86 kg (190 lb) |

Tubing Sizes

| | |
|-------------------------|------------------------------------------------------------------------------------------------|
| Tubing diameter (max) | 25 mm (1") |
| Tubing length (max) | 102 mm (4") 178 mm (7") wide heating element tool 50 mm (2") narrow heating element tool |
| Work-piece length (min) | 240 mm (9.5") |

Ordering Information

| | Description | Part Number |
|-------------------|------------------------|-------------|
| Model 19 Standard | CLTEQ-M19-BELT-HTR | 714529-000 |
| Model 19 Wide | CLTEQ-M19-BELT-HTR-6IN | 075131-000 |
| Model 19 Narrow | CLTEQ-M19-BELT-HTR-SS | D43037-000 |

Users should independently evaluate the suitability of the product for their application. Before ordering check with factory for most current data.

Tunnel Oven



**Model 105
Tunnel Oven**



Applications

Table conveyor heater that provides a controlled process system suitable for installing a wide variety of heat-shrinkable tubing products up to 76 mm (3") in diameter and unlimited in length. Ideally suited for efficient processing of fibre and fabric HFT and both single-wall and dual-wall tubing. Designed as an integrated modular unit. Assemblies are placed on the entry section of a mesh belt, transported through a heating chamber, across a bank of cooling fans then discharged from the rear of the conveyor.

Features and Benefits

- Closed-loop temperature control for a precise and repeatable thermal process.
- Conveyor speed precisely set by a 3-digit potentiometer.
- Operation that requires only minimal skill.
- Contains numerous safety features.
- Custom length conveyors for longer entry and/or exit sections available.
- Optional accessories to customize the tunnel oven.
- Ability to add additional heater chambers to extended customer length wire mesh conveyor.
- Custom floor stands.

Tunnel Oven

| Technical Specification | Model 105 Tunnel Oven | | | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|---------------------------------------------------------------------------------|--------------|-----------|
| Electrical | Power requirements | 208/240 VAC, 1 \emptyset , 50/60 Hz, 15 A | | |
| | Heating elements | Two 1500 watt infrared stamped foil with black quartz face, one top and bottom. | | |
| | Operating temperature | Ambient to 650 °C | | |
| | Effective heating width | 356 mm (14") | | |
| Dimensions | Control box | Length | 515 mm | (20") |
| | | Width | 210 mm | (8") |
| | | Height | 178 mm | (7") |
| | | Control box weight | 7.7 kg | (17 lb.) |
| | Heating conveyor | Length | 990 mm | (39") |
| | | Width | 685 mm | (27") |
| | | Height | 417 mm | (17") |
| | | Heating conveyor weight | 68 kg | (150 lb.) |
| | Shipping | Length | 1346 mm | (53") |
| | | Width | 1168 mm | (46") |
| | | Height | 635 mm | (25") |
| | | Shipping weight | 146 kg | (320 lb.) |
| Product Range | Inside diameter of tubing before heat | Up to 76.2mm | (3") | |
| | Length | Perpendicular to belt travel | 356 mm (14") | |
| | | Parallel to belt travel | Unlimited | |
| Ordering Information | Description | Part Number | | |
| | CLTEQ-M105-Tunnel-oven | 955018-000 | | |
| Users should independently evaluate the suitability of the product for their application. Before ordering check with factory for most current data. | | | | |

Installation of Splice Sealing Products Adjacent to Ultrasonic Welder



RBK-ILS-Processor MkII



Applications

The RBK-ILS-Processor MkII is a semi-automatic unit designed specifically to install splice sealing products onto ultrasonically welded or crimped splice joints used in automotive harnesses.

The tool can operate in several modes:

- Stand-alone-operator sets time and temperature.
- Sequenced-preset times and temperature can be sequenced automatically (and can also be randomly selected from sequence stored).
- Automatic-communication with upstream ultrasonic welder can allow time and temperature to be automatically set without operator intervention.

The operator is able to efficiently load both machines and so minimise 'dead time'. Installing TE Connectivity's Raychem splice sealing products immediately after welding gives reduced installation time and earliest possible mechanical protection for the welded joint. The operator positions the splice sealing product centrally over the splice joint and then locates the assembly into the gripper mechanism. The wire assembly is automatically ejected, with the splice sealing product installed and the joint area sealed, insulated and strain relieved. In-line or stub-type splices can be installed.

Features and Benefits

- Optimized heating element life.
- Installation times, temperatures and product size information storage (individual selection).
- Sequenced installations.
- Operator key lock/password protection levels.
- Automatic heater retraction on mains failure.
- Automatic calibration.
- RS-232 interface allows time, temperature and product sizes for the next installation to be transferred from a remote machine (e.g. an ultrasonic welding tool).
- Machine hours and installation cycle counters.
- Software upgradeable to support special applications.
- Air cooling can be provided to an optional stub splice fixture in the RBK-Proc-MK2-Aircool version.

Installation of Splice Sealing Products Adjacent to Ultrasonic Welder

| Technical Specification | RBK-ILS-Processor MkII | |
|---------------------------------------------------------------------------------------------|------------------------------------------------------------------------|---------------------------------|
| Electrical supply | 220/240 V – 50 Hz | |
| Power consumption | 1.7 Amps (Max) | |
| Operating temperature | 550 °C (Max) (500 °C recommended) | |
| Machine cycle times for splice sealing products used on typical range of automotive splices | 6 to 20 seconds depending on wire size and the number of wires used | |
| Total system noise | < 80 dB | |
| Dimensions | 390 mm x 365 mm x 225 mm (15" x 14" x 9") | |
| Weight | 18 kg (40 lb) | |
| Product Range | RBK-ILS-125 products | Sizes 1 to 3A |
| | For other TE Connectivity's Raychem products (eg RBK-VWS, RBK-ESS ...) | Discuss with Product Management |

| Ordering Information | Description | Part Number |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|-------------|
| Equipment | RBK-Proc-Mk2-Processor | 740331-000 |
| Accessories | RBK-ILS-Proc-Stub-Sp-Fix Stub splice support fixture | 981721-000 |
| | RBK-ILS-Proc-Air-Cool-Kit Air cooling kit for use with stub splice support fixture – high process rates | 843800-000 |
| | RBK-ILS-Proc-Termfix-08mm 8 mm ring terminal fixture | 049857-000 |
| Users should independently evaluate the suitability of the product for their application. Before ordering check with factory for most current data. | | |

Engineering Notes

A large grid of graph paper for engineering notes, consisting of a uniform pattern of small squares covering the majority of the page.

Engineering Notes

A large grid of graph paper for engineering notes, consisting of a 30x30 grid of small squares.

Disclaimer and Trademarks

Disclaimer

While TE has made every reasonable effort to ensure the accuracy of the information in this catalog, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalog are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

www.te.com
www.te.com/automotive

www.tooling.te.com/europe
www.tooling.te.com
www.tooling.te.com/europe
www.tooling.te.com/china

ATUM, DURASEAL, HFT, RayBlock, RAYCHEM, VERSAFIT,
TE Connectivity and TE connectivity (logo) are trademarks.

Other product names, logos, and company names mentioned herein
may be trademarks of their respective owners.

Americas

Argentina – Buenos Aires
Phone: +54-11-4733-2202
Fax: +54-11-4733-2250

Brasil – São Paulo
Phone: +55-11-2103-6105
Fax: +55-11-2103-6204

Chile – Santiago
Phone: +56-2-345-0300
Fax: +56-2-223-1477

Canada – Toronto
Phone: +1-905-475-6222
Fax: +1-905-474-5520
Product Information Center:
Phone: +1-905-470-4425
Fax: +1-905-474-5525

Colombia – Bogotá
(Venezuela/Ecuador)
Phone: +57-1-319-8999
Fax: +57-1-319-8989

Mexico – Mexico City
Phone: +52-55-1106-0800
+01-800-733-8926
Fax: +52-55-1106-0910

For Latin/South American Countries not shown
Phone: +54-11-4733-2015
Fax: +54-11-4733-2083

United States
Harrisburg, PA
Phone: +1-717-564-0100
Fax: +1-717-986-7575
Product Information Center:
Phone: +1-800-522-6752
Fax: +1-717-986-7575

Asia/Pacific

Australia – Sydney
Phone: +61-2-9554-2600
Fax: +61-2-9502-2556
Product Information Center:
Phone: +61-2-9840-8200
Fax: +61-2-9634-6188

Indonesia – Jakarta
Phone: +65-6482-0311
Fax: +65-6482-1012

Japan – Kawasaki, Kanagawa
Phone: +81-44-844-8111
Fax: +81-44-812-3207

Korea – Seoul
Phone: +82-2-3415-4500
Fax: +82-2-3486-3810

Malaysia – Kuala Lumpur
Phone: +60-3-7805-3055
Fax: +60-3-7805-3066

New Zealand – Auckland
Phone: +64-9-634-4580
Fax: +64-9-634-4586

Philippines – Makati City
Phone: +632-848-0171
Fax: +632-867-8661

People's Republic of China
Hong Kong
Phone: +370-5-213-1402
Fax: +852-2735-0243

Shanghai
Phone: +86-21-2407-1588
Fax: +86-21-2407-1599

Singapore – Singapore
Phone: +65-6482-0311
Fax: +65-6482-1012

Taiwan – Taipei
Phone: +886-2-8768-2788
Fax: +886-2-8768-2268

Thailand – Bangkok
Phone: +66-2-955-0500
Fax: +66-2-955-0505

Vietnam – Ho Chi Minh City
Phone: +84-8-930-5546
Fax: +84-8-930-3443

Europe/Middle East/Africa

Austria – Vienna
Phone: +43-1-905-60-0
Fax: +43-1-905-60-1333
Product Information Center:
Phone: +43-1-905-60-1228
Fax: +43-1-905-60-1333

Belarus – Minsk
Phone: +375-17-237-47-94
Fax: +375-17-237-47-94
Product Information Center:
Phone: +7-495-790-7902
Fax: +7-495-721-1893

Belgium – Kessel-Lo
Phone: +31-73-6246-246
Fax: +31-73-6212-365
Product Information Center:
Phone: +31-73-6246-999
Fax: +31-73-6246-998

Bulgaria – Sofia
Phone: +359-2-971-2152
Fax: +359-2-971-2153

Czech Republic and Slovakia
Czech Republic – Kurim
Phone: +420-541-162-108
Fax: +420-541-162-104
Product Information Center:
Phone: +420-541-162-113
Fax: +420-541-162-104

Denmark – Glostrup
Phone: +45-43-48-04-00
Fax: +46-8-50-72-50-01
Product Information Center:
Phone: +46-8-50-72-50-20
Fax: +46-8-50-72-52-20

Egypt – Cairo
Phone: +20-2417-7647
Fax: +20-2419-2334

Estonia – Tartu
Phone: +372-5138-274
Fax: +372-7400-779

Finland – Helsinki
Phone: +358-95-12-34-20
Fax: +46-8-50-72-50-01
Product Information Center:
Phone: +46-8-50-72-50-20
Fax: +46-8-50-72-52-20

France – Cergy-Pontoise Cedex
Phone: +33-1-3420-8888
Fax: +33-1-3420-8800
Product Information Center:
Phone: +33-1-3420-8686
Fax: +33-1-3420-8623

France Export Divisions –
Cergy-Pontoise Cedex
Phone: +33-1-3420-8866
Fax: +33-1-3420-8300

Germany – Bensheim
Phone: +49-6251-133-0
Fax: +49-6251-133-1600
Product Information Center:
Phone: +49-6251-133-1999
Fax: +49-6251-133-1988

Greece – Athens
Phone: +30-210-9370-396/397
Fax: +30-210-9370-655

Hungary – Budapest
Phone: +36-1-289-1000
Fax: +36-1-289-1010
Product Information Center:
Phone: +36-1-289-1016
Fax: +36-1-289-1017

India – Bangalore
Phone: +91-80-2854-0800
Fax: +91-80-2854-0814

Italy – Collegno (Torino)
Phone: +39-011-4012-111
Fax: +39-011-4031-116
Product Information Center:
Phone: +39-011-4012-632
Fax: +39-011-4028-7632

Lithuania and Latvia
Lithuania – Vilnius
Phone: +370-5-213-1402
Fax: +370-5-213-1403

Netherlands – 's-Hertogenbosch
Phone: +31-73-6246-246
Fax: +31-73-6212-365
Product Information Center:
Phone: +31-73-6246-999
Fax: +31-73-6246-998

Norway – Nesbru
Phone: +47-66-77-88-50
Fax: +46-8-50-72-50-01
Product Information Center:
Phone: +46-8-50-72-50-20
Fax: +46-8-50-72-52-20

Poland – Warsaw
Phone: +48-22-4576-700
Fax: +48-22-4576-720
Product Information Center:
Phone: +48-22-4576-704
Fax: +48-22-4576-720

Romania – Bucharest
Phone: +40-21-311-3479/3596
Fax: +40-21-312-0574

Russia – Moscow
Phone: +7-495-790-7902
Fax: +7-495-721-1893
Product Information Center:
Phone: +7-495-790-7902
Fax: +7-495-721-1893

Russia – Yekaterinburg
Phone: +7-343-2531-153
Fax: +7-343-2531-152

Russia – Nizhny Novgorod
Phone: +7-831-220-33-05/-06
Fax: +7-831-220-33-39/-40

Slovenia – Ljubljana
Phone: +386-1561-3270
Fax: +386-1561-3240

South Africa – Port Elizabeth
Phone: +27-41-503-4500
Fax: +27-41-581-0440

Spain – Barcelona
Phone: +34-93-291-0330
Fax: +34-93-201-7879
Product Information Center:
Phone: +34-93-291-0366
Fax: +34-93-209-1030

Sweden – Upplands Väsby
(Switchboard)
Phone: +46-8-50-72-50-00
Fax: +46-8-50-72-50-01
Product Information Center:
Phone: +46-8-50-72-50-20
Fax: +46-8-50-72-52-20

Switzerland – Steinach
Phone: +41-71-447-0447
Fax: +41-71-447-0444
Product Information Center:
Phone: +41-71-447-0447
Fax: +41-71-447-0400

Turkey – Istanbul
Phone: +90-212-281-8181/2/3
+90-212-282-5130/5430
Fax: +90-212-281-8184

Ukraine – Kiev
Phone: +380-44-206-2265
Fax: +380-44-206-2264
Product Information Center:
Phone: +380-44-206-2265
Fax: +380-44-206-2264

United Kingdom and Ireland – Swindon
Phone: +44-8706-080208
Fax: +44-208-954-6234
Product Information Center:
Phone: +44-800-267-666
Fax: +44-208-420-8095



**Tyco Electronics AMP GmbH
a TE Connectivity Ltd. company**

AMPèrestr. 12-14
64625 Bensheim / Germany
Phone: +49 (0)6251 133-0
Fax: +49 (0)6251 133-1600

www.te.com
www.te.com/automotive

Tyco Electronics AMP GmbH certified
acc. ISO 14001 and ISO/TS 16949:2002

© 2012 Tyco Electronics AMP GmbH
1654296-3 | Revised 10-2012 | 3M · ST



AUTOMOTIVE