
www.americanbrightled.com

End-Caps for sealing respective AB-FB series rope lights


Product Image:

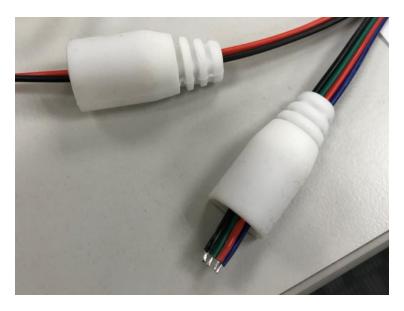

Types:


2-Wires: For single color3-Wires: For dual color


4-Wires: For RGB5-Wires: For RGBW

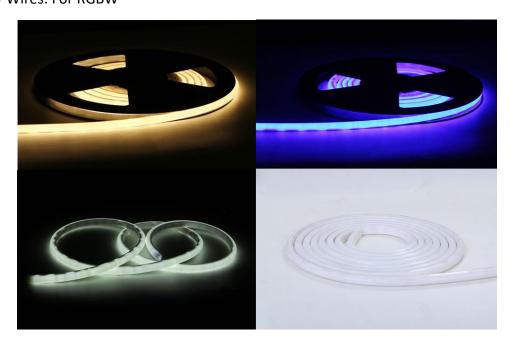


www.americanbrightled.com

Mechanical Dimension:





SECTION A-A



Note:

1. Material: Silicone, durometers: Shore A 65-75

Color: White
Unit: mm

4. The dimensions with "*" mark are adjustable

Instruction:

1. Field cut the AB-FB series rope lights at the appropriate locations.



- 2. Place the end caps on the cut sections.
- 3. Use Dow Chemical 9-1374 silicone gel to seal the end caps to maintain the IP67 waterproof grading.