

Reference Specification

200°C Operation Leaded MLCC for Automotive with AEC-Q200 RHS Series

Product specifications in this catalog are as of Mar. 2022, and are subject to change or obsolescence without notice.

Please consult the approval sheet before ordering. Please read rating and Cautions first.

⚠ CAUTION

1. OPERATING VOLTAGE

When DC-rated capacitors are to be used in AC or ripple current circuits, be sure to maintain the Vp-p value of the applied voltage or the Vo-p which contains DC bias within the rated voltage range. When the voltage is started to apply to the circuit or it is stopped applying, the irregular voltage may be generated for a transit period because of resonance or switching. Be sure to use a capacitor within rated voltage containing these irregular voltage.

When DC-rated capacitors are to be used in input circuits from commercial power source (AC filter), be sure to use Safety Recognized Capacitors because various regulations on withstand voltage or impulse withstand established for each equipment should be taken into considerations.

Voltage	DC Voltage	DC+AC Voltage	AC Voltage	Pulse Voltage(1)	Pulse Voltage(2)
Positional Measurement	Vo-p	Vo-p	Vp-p	Vp-p	Vp-p

2. OPERATING TEMPERATURE AND SELF-GENERATED HEAT

Keep the surface temperature of a capacitor below the upper limit of its rated operating temperature range. Be sure to take into account the heat generated by the capacitor itself.

When the capacitor is used in a high-frequency current, pulse current or the like, it may have the self-generated heat due to dielectric-loss. In case of Class 2 capacitors (Temp.Char.: X7R,X7S,X8L, etc.), applied voltage should be the load such as self-generated heat is within 20 °C on the condition of atmosphere temperature 25 °C. Please contact us if self-generated heat is occurred with Class 1 capacitors (Temp.Char.: C0G,U2J,X8G, etc.). When measuring, use a thermocouple of small thermal capacity-K of Φ0.1mm and be in the condition where capacitor is not affected by radiant heat of other components and wind of surroundings. Excessive heat may lead to deterioration of the capacitor's characteristics and reliability.

3. FAIL-SAFE

Be sure to provide an appropriate fail-safe function on your product to prevent a second damage that may be caused by the abnormal function or the failure of our product.

4. OPERATING AND STORAGE ENVIRONMENT

The insulating coating of capacitors does not form a perfect seal; therefore, do not use or store capacitors in a corrosive atmosphere, especially where chloride gas, sulfide gas, acid, alkali, salt or the like are present. And avoid exposure to moisture. Before cleaning, bonding, or molding this product, verify that these processes do not affect product quality by testing the performance of a cleaned, bonded or molded product in the intended equipment. Store the capacitors where the temperature and relative humidity do not exceed 5 to 40 °C and 20 to 70%. Use capacitors within 6 months.

5. VIBRATION AND IMPACT

Do not expose a capacitor or its leads to excessive shock or vibration during use.

6. SOLDERING

When soldering this product to a PCB/PWB, do not exceed the solder heat resistance specification of the capacitor. Subjecting this product to excessive heating could melt the internal junction solder and may result in thermal shocks that can crack the ceramic element.

7. BONDING AND RESIN MOLDING, RESIN COAT

In case of bonding, molding or coating this product, verify that these processes do not affect the quality of capacitor by testing the performance of a bonded or molded product in the intended equipment. In case of the amount of applications, dryness / hardening conditions of adhesives and molding resins containing organic solvents (ethyl acetate, methyl ethyl ketone, toluene, etc.) are unsuitable, the outer coating resin of a capacitor is damaged by the organic solvents and it may result, worst case, in a short circuit.

The variation in thickness of adhesive or molding resin may cause a outer coating resin cracking and/or ceramic element cracking of a capacitor in a temperature cycling.

8. TREATMENT AFTER BONDING AND RESIN MOLDING, RESIN COAT

When the outer coating is hot (over 100 °C) after soldering, it becomes soft and fragile. So please be careful not to give it mechanical stress.

Failure to follow the above cautions may result, worst case, in a short circuit and cause fuming or partial dispersion when the product is used.

9. LIMITATION OF APPLICATIONS

Please contact us before using our products for the applications listed below which require especially high reliability for the prevention of defects which might directly cause damage to the third party's life, body or property.

1. Aircraft equipment 2. Aerospace equipment

3. Undersea equipment 4. Power plant control equipment

5. Medical equipment6. Transportation equipment (vehicles, trains, ships, etc.)7. Traffic signal equipment8. Disaster prevention / crime prevention equipment

9. Data-processing equipment exerting influence on public

10. Application of similar complexity and/or reliability requirements to the applications listed in the above.

NOTICE

1. CLEANING (ULTRASONIC CLEANING)

To perform ultrasonic cleaning, observe the following conditions.

Rinse bath capacity: Output of 20 watts per liter or less.

Rinsing time: 5 min maximum.

Do not vibrate the PCB/PWB directly.

Excessive ultrasonic cleaning may lead to fatigue destruction of the lead wires.

2. SOLDERING AND MOUNTING

Insertion of the Lead Wire

- When soldering, insert the lead wire into the PCB without mechanically stressing the lead wire.
- Insert the lead wire into the PCB with a distance appropriate to the lead space.

3. CAPACITANCE CHANGE OF CAPACITORS

Class 2 capacitors (Temp.Char. : X7R,X7S,X8L etc.)

Class 2 capacitors an aging characteristic, whereby the capacitor continually decreases its capacitance slightly if the capacitor leaves for a long time. Moreover, capacitance might change greatly depending on a surrounding temperature or an applied voltage. So, it is not likely to be able to use for the time constant circuit

Please contact us if you need a detail information.

⚠ NOTE

- 1. Please make sure that your product has been evaluated in view of your specifications with our product being mounted to your product.
- 2. You are requested not to use our product deviating from this specification.

1. Application

This specification is applied to 200°C Operation Leaded MLCC RHS series iin accordance with AEC-Q200 requirements used for Automotive Electronic equipment.

2. Rating

• Applied maximum temperature up to 200°C

Note: Maximum accumulative time to 200°C is within 2000 hours.

• Part Number Configuration

ex.)	RHS	7G	2A	101	J	0	A2	H01	В
	Series	Temperature	Rated	Capacitance	Capacitance	Dimension	Lead	Individual	Package
		Characteristics	Voltage		Tolerance	(LxW)	Style	Specification	

Series

Code	Content
RHS	Epoxy coated, 200°C max.


• Temperature Characteristics

Code	Temp. Char.	Temp. Range	Temp.coef.	Standard Temp.	Operating Temp. Range
	CCG	-55∼25°C	0+30/-72ppm/°C		
7G		25∼125°C	0+/-30ppm/°C	25°C	-55∼200°C
	(Murata code)	125∼200°C	0+72/-30ppm/°C		

Rated Voltage

Code	Rated voltage
2A	DC100V

When the product temperature exceeds $150^{\circ}\,$ C, please use this product within the voltage and temperature derated conditions in the figure below.

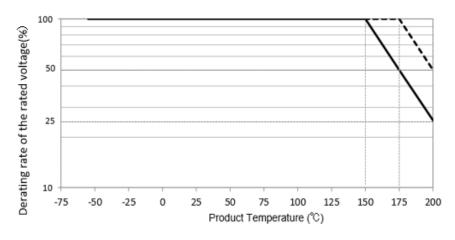

----- Temp. Char. : CCG, Rated Voltage : 100V, Capacitance : 100pF-1000pF

Temp. Char.: CCG, Rated Voltage: 100V, Capacitance: 1200pF-3300pF

Capacitance

The first two digits denote significant figures; the last digit denotes the multiplier of 10 in pF. ex.) In case of 101

$$10 \times 10^1 = 100 pF$$

• Capacitance Tolerance

Code	Capacitance Tolerance
J	+/-5%

• Dimension (LxW)

Please refer to [Part number list].

*Lead wire is "solder coated CP wire".

Code	Lead Style	Lead spacing (mm)
A2	Straight type	2.5+/-0.8
DG	Straight taping type	2.5+0.4/-0.2
K1	Inside crimp type	5.0+/-0.8
M2	Inside crimp taping type	5.0+0.6/-0.2

• Individual Specification

Murata's control code.

Please refer to [Part number list].

Package


Code	Package
Α	Taping type of Ammo
В	Bulk type

3. Marking

Temp. char. : Letter code : 4 (CCG char.)


Capacitance : 3 digit numbers

Capacitance tolerance : Code




4. Part number list

 Straight Long (Lead Style: A2)




 Inside Crimp (Lead Style:K*)




Unit: mm

						_				Unit : mm		
Customer	Murata Part Number	T.C.	DC Rated	Cap.	Сар.		Dime	ension ((mm)		Dimension (LxW)	Pack qty.
Part Number	Warata Fart Namber	1.0.	Volt. (V)	оцр.	Tol.	L	W	W1	F	Т	Lead Style	
	RHS7G2A101J0A2H01B	CCG	100	100pF	±5%	3.9	3.5	-	2.5	2.6	0A2	500
	RHS7G2A121J0A2H01B	CCG	100	120pF	±5%	3.9	3.5	•	2.5	2.6	0A2	500
	RHS7G2A151J0A2H01B	CCG	100	150pF	±5%	3.9	3.5	•	2.5	2.6	0A2	500
	RHS7G2A181J0A2H01B	CCG	100	180pF	±5%	3.9	3.5	-	2.5	2.6	0A2	500
	RHS7G2A221J0A2H01B	CCG	100	220pF	±5%	3.9	3.5	•	2.5	2.6	0A2	500
	RHS7G2A271J0A2H01B	CCG	100	270pF	±5%	3.9	3.5	-	2.5	2.6	0A2	500
	RHS7G2A331J0A2H01B	CCG	100	330pF	±5%	3.9	3.5	•	2.5	2.6	0A2	500
	RHS7G2A391J0A2H01B	CCG	100	390pF	±5%	3.9	3.5	•	2.5	2.6	0A2	500
	RHS7G2A471J0A2H01B	CCG	100	470pF	±5%	3.9	3.5	•	2.5	2.6	0A2	500
	RHS7G2A561J0A2H01B	CCG	100	560pF	±5%	3.9	3.5	•	2.5	2.6	0A2	500
	RHS7G2A681J0A2H01B	CCG	100	680pF	±5%	3.9	3.5	•	2.5	2.6	0A2	500
	RHS7G2A821J0A2H01B	CCG	100	820pF	±5%	3.9	3.5	•	2.5	2.6	0A2	500
	RHS7G2A102J0A2H01B	CCG	100	1000pF	±5%	3.9	3.5	•	2.5	2.6	0A2	500
	RHS7G2A122J0A2H01B	CCG	100	1200pF	±5%	3.9	3.5	•	2.5	2.6	0A2	500
	RHS7G2A152J0A2H01B	CCG	100	1500pF	±5%	3.9	3.5	•	2.5	2.6	0A2	500
	RHS7G2A182J1A2H01B	CCG	100	1800pF	±5%	4.2	3.5	•	2.5	2.8	1A2	500
	RHS7G2A222J1A2H01B	CCG	100	2200pF	±5%	4.2	3.5	•	2.5	2.8	1A2	500
	RHS7G2A272J1A2H01B	CCG	100	2700pF	±5%	4.2	3.5	-	2.5	2.8	1A2	500
	RHS7G2A332J1A2H01B	CCG	100	3300pF	±5%	4.2	3.5	-	2.5	2.8	1A2	500
	RHS7G2A101J0K1H01B	CCG	100	100pF	±5%	3.9	3.5	6.0	5.0	2.6	0K1	500
	RHS7G2A121J0K1H01B	CCG	100	120pF	±5%	3.9	3.5	6.0	5.0	2.6	0K1	500
	RHS7G2A151J0K1H01B	CCG	100	150pF	±5%	3.9	3.5	6.0	5.0	2.6	0K1	500
	RHS7G2A181J0K1H01B	CCG	100	180pF	±5%	3.9	3.5	6.0	5.0	2.6	0K1	500
	RHS7G2A221J0K1H01B	CCG	100	220pF	±5%	3.9	3.5	6.0	5.0	2.6	0K1	500
	RHS7G2A271J0K1H01B	CCG	100	270pF	±5%	3.9	3.5	6.0	5.0	2.6	0K1	500
	RHS7G2A331J0K1H01B	CCG	100	330pF	±5%	3.9	3.5	6.0	5.0	2.6	0K1	500
	RHS7G2A391J0K1H01B	CCG	100	390pF	±5%	3.9	3.5	6.0	5.0	2.6	0K1	500
	RHS7G2A471J0K1H01B	CCG	100	470pF	±5%	3.9	3.5	6.0	5.0	2.6	0K1	500
	RHS7G2A561J0K1H01B	CCG	100	560pF	±5%	3.9	3.5	6.0	5.0	2.6	0K1	500
	RHS7G2A681J0K1H01B	CCG	100	680pF	±5%	3.9	3.5	6.0	5.0	2.6	0K1	500
	RHS7G2A821J0K1H01B	CCG	100	820pF	±5%	3.9	3.5	6.0	5.0	2.6	0K1	500
	RHS7G2A102J0K1H01B	CCG	100	1000pF	±5%	3.9	3.5	6.0	5.0	2.6	0K1	500
	RHS7G2A122J0K1H01B	CCG	100	1200pF	±5%	3.9	3.5	6.0	5.0	2.6	0K1	500
	RHS7G2A152J0K1H01B	CCG	100	1500pF	±5%	3.9	3.5	6.0	5.0	2.6	0K1	500
	RHS7G2A182J1K1H01B	CCG	100	1800pF	±5%	4.2	3.5	5.0	5.0	2.8	1K1	500
	RHS7G2A222J1K1H01B	CCG	100	2200pF	±5%	4.2	3.5	5.0	5.0	2.8	1K1	500
	RHS7G2A272J1K1H01B	CCG	100	2700pF	±5%	4.2	3.5	5.0	5.0	2.8	1K1	500
	RHS7G2A332J1K1H01B	CCG	100	3300pF	±5%	4.2	3.5	5.0	5.0	2.8	1K1	500

 Straight Taping (Lead Style:DG)



 Inside Crimp Taping (Lead Style: M2)



Unit : mm

												Unit : mm		
Customer	Murata Part Number	T.C.	DC Rated	Cap.	Cap.	Dimension (mm)						Dimension (LxW)	Pac qty	
Part Number			Volt. (V)	33.	Tol.	L	W	W1	F	Т	H/H0	Lead Style		
	RHS7G2A101J0DGH01A	CCG	100	100pF	±5%	3.9	3.5	-	2.5	2.6	20.0	0DG	200	
	RHS7G2A121J0DGH01A	CCG	100	120pF	±5%	3.9	3.5	-	2.5	2.6	20.0	0DG	200	
	RHS7G2A151J0DGH01A	CCG	100	150pF	±5%	3.9	3.5	-	2.5	2.6	20.0	0DG	200	
	RHS7G2A181J0DGH01A	CCG	100	180pF	±5%	3.9	3.5	-	2.5	2.6	20.0	0DG	200	
	RHS7G2A221J0DGH01A	CCG	100	220pF	±5%	3.9	3.5	-	2.5	2.6	20.0	0DG	20	
	RHS7G2A271J0DGH01A	CCG	100	270pF	±5%	3.9	3.5	-	2.5	2.6	20.0	0DG	20	
	RHS7G2A331J0DGH01A	CCG	100	330pF	±5%	3.9	3.5	-	2.5	2.6	20.0	0DG	20	
	RHS7G2A391J0DGH01A	CCG	100	390pF	±5%	3.9	3.5		2.5	2.6	20.0	0DG	20	
	RHS7G2A471J0DGH01A	CCG	100	470pF	±5%	3.9	3.5	-	2.5	2.6	20.0	0DG	20	
	RHS7G2A561J0DGH01A	CCG	100	560pF	±5%	3.9	3.5	-	2.5	2.6	20.0	0DG	20	
	RHS7G2A681J0DGH01A	CCG	100	680pF	±5%	3.9	3.5	-	2.5	2.6	20.0	0DG	20	
	RHS7G2A821J0DGH01A	CCG	100	820pF	±5%	3.9	3.5	-	2.5	2.6	20.0	0DG	20	
	RHS7G2A102J0DGH01A	CCG	100	1000pF	±5%	3.9	3.5	-	2.5	2.6	20.0	0DG	20	
	RHS7G2A122J0DGH01A	CCG	100	1200pF	±5%	3.9	3.5		2.5	2.6	20.0	0DG	20	
	RHS7G2A152J0DGH01A	CCG	100	1500pF	±5%	3.9	3.5		2.5	2.6	20.0	0DG	20	
	RHS7G2A182J1DGH01A	CCG	100	1800pF	±5%	4.2	3.5	-	2.5	2.8	20.0	1DG	20	
	RHS7G2A222J1DGH01A	CCG	100	2200pF	±5%	4.2	3.5	-	2.5	2.8	20.0	1DG	20	
	RHS7G2A272J1DGH01A	CCG	100	2700pF	±5%	4.2	3.5	-	2.5	2.8	20.0	1DG	20	
	RHS7G2A332J1DGH01A	CCG	100	3300pF	±5%	4.2	3.5	-	2.5	2.8	20.0	1DG	20	
	RHS7G2A101J0M2H01A	CCG	100	100pF	±5%	3.9	3.5	6.0	5.0	2.6	20.0	0M2	20	
	RHS7G2A121J0M2H01A	CCG	100	120pF	±5%	3.9	3.5	6.0	5.0	2.6	20.0	0M2	20	
	RHS7G2A151J0M2H01A	CCG	100	150pF	±5%	3.9	3.5	6.0	5.0	2.6	20.0	0M2	20	
	RHS7G2A181J0M2H01A	CCG	100	180pF	±5%	3.9	3.5	6.0	5.0	2.6	20.0	0M2	20	
	RHS7G2A221J0M2H01A	CCG	100	220pF	±5%	3.9	3.5	6.0	5.0	2.6	20.0	0M2	20	
	RHS7G2A271J0M2H01A	CCG	100	270pF	±5%	3.9	3.5	6.0	5.0	2.6	20.0	0M2	20	
	RHS7G2A331J0M2H01A	CCG	100	330pF	±5%	3.9	3.5	6.0	5.0	2.6	20.0	0M2	20	
	RHS7G2A391J0M2H01A	CCG	100	390pF	±5%	3.9	3.5	6.0	5.0	2.6	20.0	0M2	20	
	RHS7G2A471J0M2H01A	CCG	100	470pF	±5%	3.9	3.5	6.0	5.0	2.6	20.0	0M2	20	
	RHS7G2A561J0M2H01A	CCG	100	560pF	±5%	3.9	3.5	6.0	5.0	2.6	20.0	0M2	20	
	RHS7G2A681J0M2H01A	CCG	100	680pF	±5%	3.9	3.5	6.0	5.0	2.6	20.0	0M2	20	
	RHS7G2A821J0M2H01A	CCG	100	820pF	±5%	3.9	3.5	6.0	5.0	2.6	20.0	0M2	20	
	RHS7G2A102J0M2H01A	CCG	100	1000pF	±5%	3.9	3.5	6.0	5.0	2.6	20.0	0M2	20	
	RHS7G2A122J0M2H01A	CCG	100	1200pF	±5%	3.9	3.5	6.0	5.0	2.6	20.0	0M2	20	
	RHS7G2A152J0M2H01A	CCG	100	1500pF	±5%	3.9	3.5	6.0	5.0	2.6	20.0	0M2	20	
	RHS7G2A182J1M2H01A	CCG	100	1800pF	±5%	4.2	3.5	5.0	5.0	2.8	20.0	1M2	20	
	RHS7G2A222J1M2H01A	CCG	100	2200pF	±5%	4.2	3.5	5.0	5.0	2.8	20.0	1M2	20	
	RHS7G2A272J1M2H01A	CCG	100	2700pF	±5%	4.2	3.5	5.0	5.0	2.8	20.0	1M2	20	
	RHS7G2A332J1M2H01A	CCG	100	3300pF	±5%	4.2	3.5	5.0	5.0	2.8	20.0	1M2	20	

Reference only

5. AE	C-Q200 Murata	Standard Spec	ifications and Test Methods	
No.		c-Q200 st Item	Specification	AEC-Q200 Test Method
1	Pre-and Post-S			-
2	High Temperature	Appearance	No defects or abnormalities except color change of outer coating.	Sit the capacitor for 1000±12 hours at 200±5°C. Let sit for 24±2 hours at *room condition, then measure.
	Exposure	Capacitance	Within ±3% or ±0.3pF	7
	(Storage)	Change	(Whichever is larger)	
		Q	Q ≧ 350	
		I.R.	1,000MΩ min.	
3	Temperature	Appearance	No defects or abnormalities except color	Perform the 1000 cycles according to the four heat treatments listed in
	Cycling		change of outer coating	the following table. Let sit for 24±2 hours at *room condition, then measure.
		Capacitance	Within ±5% or ±0.5pF	Step 1 2 3 4
		Change	(Whichever is larger)	Temp. FF.0/0 Room 000.F/0 Room
		Q	Q ≧ 350	(°C) -55+0/-3 Temp. 200+5/-0 Temp.
		I.R.	1,000MΩ min.	Time (min.) 15±3 1 15±3 1
4	Moisture	Appearance	No defects or abnormalities.	Apply the 24 hours heat (25 to 65°C) and humidity (80 to 98%)
	Resistance	Capacitance	Within ±5% or ± 0.5pF	treatment shown below, 10 consecutive times.
		Change	(Whichever is larger)	Let sit for 24±2 hours at *room condition, then measure.
		Q	Q ≧ 200	Liveridity Liveridity
		I.R.	500MΩ min.	(°C) Humidity 80~98% Humidity 80~98% Humidity
				70 90-98% V 90-98% 65
				60
				55
				©50 045 040 035
				840 / / / / / / / / / / / / / / / / / / /
				E ³⁵
				25 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5
				20 +10 -2 °C
				15 2 3 10 Initial measurement
				5 Initial measurement 5
				-5
				One cycle 24 hours 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
				0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 Hours
5	Biased	Appearance	No defects or abnormalities.	Apply the rated voltage and DC1.3+0.2/-0V (add 100kΩ resistor)
	Humidity	Capacitance	Within ±5% or ± 0.5pF	at 85±3°C and 80 to 85% humidity for 1000±12 hours.
		Change	(Whichever is larger)	Remove and let sit for 24±2 hours at *room condition, then measure.
		Q	Q ≧ 200	The charge/discharge current is less than 50mA.
		I.R.	500MΩ min.	
6	Operational	Appearance	No defects or abnormalities except color	Apply voltage in Table for 1,000±12h at 200±5°C.
	Life	0 - 11	change of outer coating.	Let sit for 24±2 hours at *room condition, then measure.
		Capacitance	Within ±3% or ±0.3pF	The charge/discharge current is less than 50mA.
		Change	(Whichever is larger)	Capacitance Test Voltage
		Q	Q ≥ 350	100pF-1000pF 50% of the rated voltage
		I.R.	1,000M Ω min.	1200pF-3300pF 25% of the rated voltage
7	External Visua		No defects or abnormalities.	Visual inspection.
8	Physical Dime	nsion	Within the specified dimensions.	Using calipers and micrometers.
9	Marking	Ta	To be easily legible.	Visual inspection.
10	Resistance	Appearance	No defects or abnormalities.	Per MIL-STD-202 Method 215
	to Solvents	Capacitance	Within the specified tolerance.	Solvent 1 : 1 part (by volume) of isopropyl alcohol
		Q	Q ≧ 1,000	3 parts (by volume) of mineral spirits
		I.R.	10,000MΩ min.	Solvent 2 : Terpene defluxer
				Solvent 3: 42 parts (by volume) of water
				1part (by volume) of propylene glycol monomethyl ether
			1	1 part (by volume) of monoethanolamine
roo"	m condition" T	emperature : 15	5 to 35°C, Relative humidity : 45 to 75%, Atmo	osphere pressure : 86 to 106kPa
i				

Reference only

			Referen	ce only						
No.		-Q200 t Item	Specification	AEC-Q200 Test Method						
11	Mechanical	Appearance	No defects or abnormalities.	Three shocks in	n each direction	on should be a	pplied along 3			
	Shock	Capacitance	Within the specified tolerance.	mutually perper	ndicular axes	of the test spe	cimen (18 sho	cks).		
		Q	Q ≧ 1,000	The specified te	est pulse shou	uld be Half-sine	e and should h	ave a		
				duration : 0.5ms						
12	Vibration	Appearance	No defects or abnormalities.				, ,			
12	VIDIALION			The capacitor should be subjected to a simple harmonic motion having a total amplitude of 1.5mm, the frequency being varied						
		Capacitance	Within the specified tolerance.	_	•					
		Q	Q ≧ 1,000	uniformly betwe						
				The frequency i	range, from 1	0 to 2000Hz a	nd return to 10)Hz,		
				should be trave	rsed in appro	ximately 20 m	in. This motion	l		
				should be applied	ed for 12 item	is in each 3 mi	utually perpen	dicular		
				directions (total	of 36 times).					
13-1	Resistance to	Appearance	No defects or abnormalities.	The lead wires	should be imr	mersed in the r	melted solder	1.5 to 2.0mm		
	Soldering	Capacitance	Within ±2.5% or ±0.25pF	from the root of	terminal at 2	60±5°C for 10:	±1 seconds.			
	Heat	Change	(Whichever is larger)							
	(Non-	Dielectric	No defects.	Post-treatmen	ıt					
	Preheat)		The delecte.	Capacitor shoul		or 24+2 hours	at *room con	dition		
	Fielleat)	Strength		Capacitor Sriour	ia be storea it	01 24±2 110u15	at 100111 con	altion.		
		(Between								
		terminals)		<u> </u>						
13-2	Resistance to	Appearance	No defects or abnormalities.	First the capacit						
	Soldering	Capacitance	Within ±2.5% or ±0.25pF	Then, the lead v	wires should l	be immersed in	n the melted s	older		
	Heat	Change	(Whichever is larger)	1.5 to 2.0mm fro	om the root o	f terminal at 26	60±5°C for 7.5	+0/-1 seconds.		
	(On-	Dielectric	No defects.							
	Preheat)	Strength		Post-treatmen	ıt					
		(Between		Capacitor shoul	ld be stored for	or 24±2 hours	at *room cond	dition.		
		terminals)								
13-3	Resistance to	Appearance	No defects or abnormalities.	Test condition						
10 0	Soldering	Capacitance	Within ±2.5% or ±0.25pF	-	of iron tin : 25	0+10°C				
	ŭ	1	· ·	Temperature of iron-tip: 350±10°C Soldering time: 3.5±0.5 seconds						
	Heat	Change	(Whichever is larger)	_		conas				
	(soldering	Dielectric	No defects.	Soldering position						
	iron method)	Strength		Straight Lead : 1.5 to 2.0mm from the root of terminal.						
		(Between		Crimp Lead : 1	1.5 to 2.0mm	from the end of	of lead bend.			
		terminals)								
				 Post-treatmen 	it					
				Capacitor shoul	ld be stored for	or 24±2 hours	at *room cond	dition.		
14	Thermal	Appearance	No defects or abnormalities.	Perform the 300	0 cycles acco	rding to the tw	o heat treatme	ents listed in the		
	Shock	Capacitance	Within ±5% or ±0.5pF	following table (
		Change	(Whichever is larger)	Let sit for 24±2						
		_	- >	-				-		
		Q I.R.	Q ≥ 350	-	Step	1	2			
		I.K.	1,000MΩ min.		Temp.	55.0/0	000.5/0			
					(°C)	-55+0/-3	200+5/-0			
					Time					
					(min.)	15±3	15±3			
				ļ '		I.	1	1		
15	ESD	Appearance	No defects or abnormalities.	Per AEC-Q200-	-002					
		Capacitance	Within the specified tolerance.							
		Q	Q ≧ 1,000							
		I.R.	10,000MΩ min.	1						
16	Solderability	1	Lead wire should be soldered with	The terminal of	a capacitor is	dipped into a	solution of eth	anol		
	Coldorability		uniform coating on the axial direction over	(JIS-K-8101) ar	· ·					
			95% of the circumferential direction.				-			
			95% of the circumerential direction.	then into molter						
				the depth of dip	ping is up to	about 1.5 to 21	nm from the te	erminai body.		
				Temp. of solder						
				245±5°C Lead	d Free Solder	(Sn-3.0Ag-0.5	5Cu)			
				235±5°C H60	A or H63A E	utectic Solder				
* "rooi	m condition" Te	emperature : 15	to 35°C, Relative humidity : 45 to 75%, Atmos	sphere pressure :	86 to 106kPa	1				


Reference only

	Reference only									
No.	AEC-Q200 Test Item		Specifications		AEC-Q200 Test Method					
17	Electrical Appearance		No defects or abnormalities.		Visual inspection.					
	Characte-	Capacitance		cified tolerance.	The capacitance, Q should be measured at 25°C at the frequency					
	rization	Q	Q ≧ 1,000	<u> </u>	_ `	and voltage shown in the table.				
						Nominal Cap.	Frequency	Volta	age	
						C ≦ 1000pF	1±0.1MHz	AC0.5 to 5		
						C > 1000pF	1±0.1kHz	AC1±0.2		
		Insulation	Room	10,000MΩ min.	The incul	lation resistance s	hould be med			
		Resistance	Temperature	TO,OOOIVILE TIIITI.		ge not exceeding				
		(I.R.)	Tomporature			idity and within 2 r		-	ar tomporu	iuio
		(1.14.)			(Charge/Discharge current ≤ 50mA.)					
			High	20MΩ min.		lation resistance s		asured at 20	0±5°C with	а
			Temperature		DC voltage not exceeding voltage in Table and within 2 min. of					
					charging.					
					(Charge/Discharge current ≦ 50mA.)					
						Capacitance		Test Voltag	je]
						100pF-1000p		of the rated		
					L	1200pF-3300p	oF 25%	of the rated	voltage]
		Dielectric	Between	No defects or abnormalities.		acitor should not b	•	•		3
		Strength	Terminals		applied between the terminations for 1 to 5 seconds.					
					(Charge/	(Charge/Discharge current ≤ 50mA.)				
					 	Rated Voltage DC100V	_	Fest Voltage of the rated v		
						DOTOOV	30078	or the rated	rollage	
			Body	No defects or abnormalities.	The capacitor is placed in a container with metal balls of 1mm diameter so that each terminal, short-circuit, is kept approximately 2mm from the balls as shown in the figure, and voltage in table is impressed for 1 to 5 seconds between capacitor terminals and metal balls. Approx. 2mm Approx. 2mm Metal					
			Insulation							
										¥
										 不
					(Charge/Discharge current ≤ 50mA.)					
					Г	Rated Voltage		Test Voltage		
						DC100V		of the rated		
18	Terminal	Tensile	Termination no	t to be broken or loosened.	As in the	figure, fix the cap	acitor body, a	pply the force	ce graduall	у
	Strength Strength				to each lead in the radial direction of the capacitor until reaching					
					10N and then keep the force applied for 10±1 seconds.					
						1/6+4/1				
				Ι ↓∏						
						F Ø ↓				
		Bending	Termination not to be broken or loosened.		Each lea	Each lead wire should be subjected to a force of 2.5N and then				
		Strength			be bent 9	be bent 90° at the point of egress in one direction. Each wire is				
					then returned to the original position and bent 90° in the opposite					
					direction at the rate of one bend per 2 to 3 seconds.					
19	Capacitance			cified Tolerance.		The capacitance change should be measured after 5min. at				
	Temperature Characteristics			om/°C (-55 to 25°C)	each spe	ecified temperature	e step.			
			0±30ppm/°C (25 to 125°C) 0+72/-30ppm/°C (125 to 200°C)			Step	Tempera	ature(°C)		
			υ+ <i>ι</i> 2/-3υρρ	111 0 (120 to 200 O)		1	25	5±2		
						2		5±3		
						3		5±2		
						4	200			
						5	25	5±2		
						The temperature coefficient is determined using the capacitance				
						measured in step 3 as a reference. When cycling the temperature				
					sequentially from step 1 through 5 (-55°C to 150°C)					
						the capacitance should be within the specified tolerance for the				
						temperature coefficient and capacitance change as Table A.				
						The capacitance drift is calculated by dividing the differences between the maximum and minimum measured values in the				
									es in the	
* "roop	n condition" Te	mnerature · 15	to 35°C. Pelativ	re humidity : 45 to 75%, Atmosphere	_	and 5 by the capa	citarice value	anı step 3.		
ESRH		mporature . 10	oo o, ixtialiv	5 hammany . 40 to 7070, Authosphere	PICOOUIE .	OU TOURF A				

6. Packing specification

•Bulk type (Packing style code : B)

The size of packing case and packing way

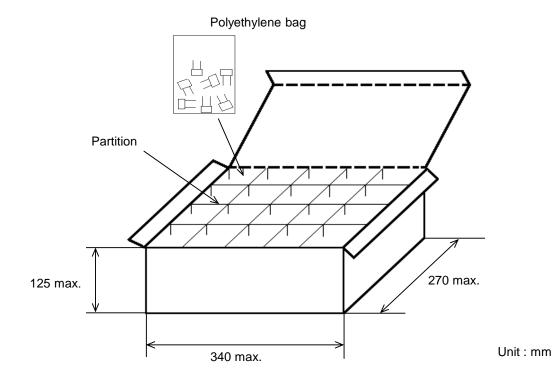

The number of packing = *1 Packing quantity × *2 n

*1 : Please refer to [Part number list].

*2 : Standard n = 20 (bag)


Note)


The outer package and the number of outer packing be changed by the order getting amount.

·Ammo pack taping type (Packing style code : A)

A crease is made every 25 pitches, and the tape with capacitors is packed zigzag into a case. When body of the capacitor is piled on other body under it.

The size of packing case and packing way

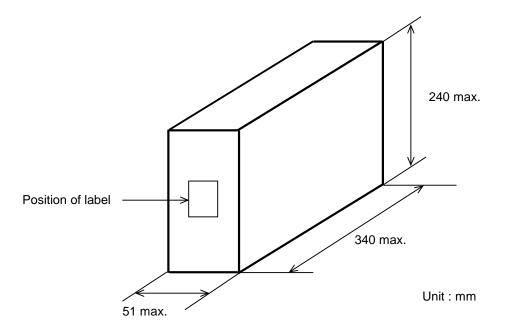

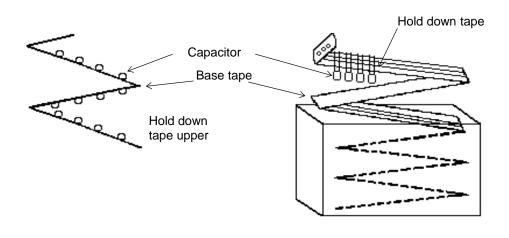


7. Taping specification

7-1. Dimension of capacitors on tape

Straight taping type < Lead Style : DG >


Pitch of component 12.7mm / Lead spacing 2.5mm

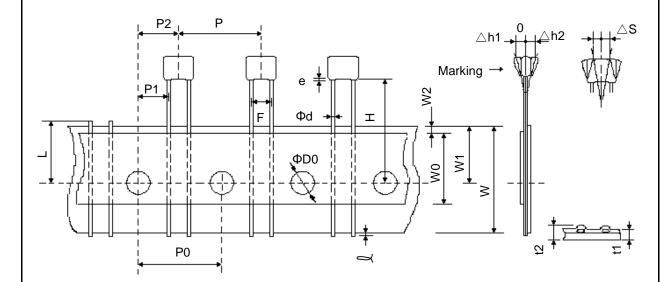

 $\mathsf{Unit}:\mathsf{mm}$

Item		Dimensions	Remarks	
Pitch of component		12.7+/-1.0		
Pitch of sprocket hole		12.7+/-0.2		
Lead spacing	F	2.5+0.4/-0.2		
Length from hole center to component center		6.35+/-1.3	Deviation of progress direction	
Length from hole center to lead	P1	5.1+/-0.7		
Deviation along tape, left or right defect		0+/-2.0	They include deviation by lead bend	
Carrier tape width	W	18.0+/-0.5		
Position of sprocket hole	W1	9.0+0/-0.5	Deviation of tape width direction	
Lead distance between reference and bottom plane	Н	20.0+/-0.5		
Protrusion length	L	0.5 max.		
Diameter of sprocket hole	ФD0	4.0+/-0.1		
Lead diameter	Фd	0.5+/-0.05		
Total tape thickness	t1	0.6+/-0.3	They include hold down tape	
Total thickness of tape and lead wire	t2	1.5 max.	thickness	
Deviation across tape	∆ h1	1.0 max.		
Deviation across tape	Δh2	1.0 IIIax.		
Portion to cut in case of defect	L	11.0+0/-1.0		
Hold down tape width		9.5 min.		
Hold down tape position	W2	1.5+/-1.5		
Coating extension on lead	е	2.0 max.		

Inside crimp taping type < Lead Style : M2 > Pitch of component 12.7mm / Lead spacing 5.0mm

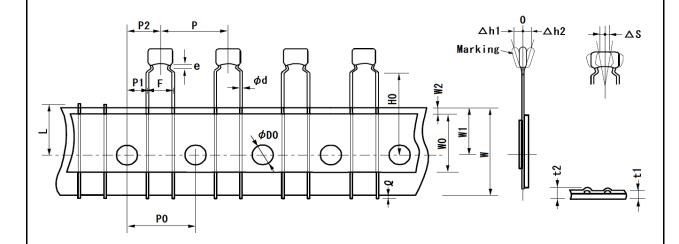


Unit: mm

Item	Code	Dimensions	Remarks	
Pitch of component		12.7+/-1.0		
Pitch of sprocket hole		12.7+/-0.2		
Lead spacing		5.0+0.6/-0.2		
Length from hole center to component center		6.35+/-1.3	Deviation of progress direction	
Length from hole center to lead	P1	3.85+/-0.7		
Deviation along tape, left or right defect	ΔS	0+/-2.0	They include deviation by lead bend	
Carrier tape width	W	18.0+/-0.5		
Position of sprocket hole	W1	9.0+0/-0.5	Deviation of tape width direction	
Lead distance between reference and bottom plane	H0	20.0+/-0.5		
Protrusion length	l	0.5 max.		
Diameter of sprocket hole	ФD0	4.0+/-0.1		
Lead diameter	Фd	0.5+/-0.05		
Total tape thickness	t1	0.6+/-0.3	They include hold down tape	
Total thickness of tape and lead wire	t2	1.5 max.	thickness	
Doviation across topo	Δh1	2.0 max. (Dimension code : W)		
Deviation across tape		1.0 max. (ex	ccept as above)	
Portion to cut in case of defect	L	11.0+0/-1.0		
Hold down tape width	W0	9.5 min.		
Hold down tape position	W2	1.5+/-1.5		
Coating extension on lead		Up to the end of crimp		


7-2. Splicing way of tape

1) Adhesive force of tape is over 3N at test condition as below.

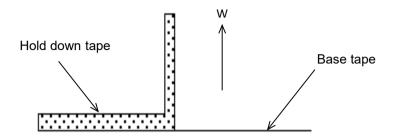


2) Splicing of tape

- a) When base tape is spliced
 - •Base tape shall be spliced by cellophane tape. (Total tape thickness shall be less than 1.05mm.)

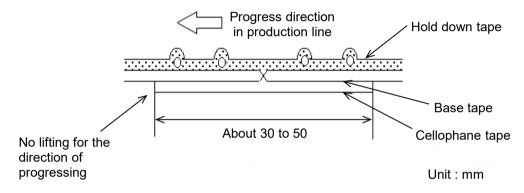

- b) When hold down tape is spliced
 - •Hold down tape shall be spliced with overlapping. (Total tape thickness shall be less than 1.05mm.)

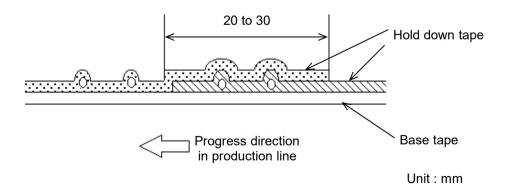

c) When both tape are spliced

•Base tape and hold down tape shall be spliced with splicing tape.