

# **LED06W-LT Series** Line Voltage Dimmable







## 120Vac Input - ELV & Triac Dimming Models

| Model                  | Output Current<br>(mA ±5%) | Output Voltage<br>Range (Vdc) | Max. Output<br>Power (W) | Typical<br>Efficiency |  |
|------------------------|----------------------------|-------------------------------|--------------------------|-----------------------|--|
| LED06W120-036-C0170-LT | 170                        | 22-36                         | 6                        | 82%                   |  |
| LED06W120-030-C0200-LT | 200                        | 18-30                         | 6                        | 82%                   |  |
| LED06W120-028-C0220-LT | 220                        | 17-28                         | 6                        | 81%                   |  |
| LED06W120-020-C0350-LT | 350                        | 12-20                         | 6                        | 81%                   |  |
| LED06W120-014-C0450-LT | 450                        | 8-14                          | 6                        | 80%                   |  |
| LED06W120-012-C0500-LT | 500                        | 7-12                          | 6                        | 80%                   |  |


## 230-277Vac Input - ELV & Triac Dimming Models

| Model Number           | Output Current<br>(mA ±5%) | Output Voltage<br>Range (Vdc) | Max. Output<br>Power (W) | Typical<br>Efficiency |  |
|------------------------|----------------------------|-------------------------------|--------------------------|-----------------------|--|
| LED06W230-036-C0170-LT | 170                        | 22-36                         | 6                        | 82%                   |  |
| LED06W230-030-C0200-LT | 200                        | 18-30                         | 6                        | 82%                   |  |
| LED06W230-028-C0220-LT | 220                        | 17-28                         | 6                        | 81%                   |  |
| LED06W230-020-C0350-LT | 350                        | 12-20                         | 6                        | 81%                   |  |
| LED06W230-014-C0450-LT | 450                        | 8-14                          | 6                        | 80%                   |  |
| LED06W230-012-C0500-LT | 500                        | 7-12                          | 6                        | 80%                   |  |

Class 2: US/Canada

| Safety Certification | Standard   |  |  |
|----------------------|--|--|--|
| UL/CUL               | UL8750, UL1310 for UL Class 2 & CAN/CSA C22.2 No. 250.13, UL Type HL |  |  |
| CE                   | EN 61347-1, EN61347-2-13   |  |  |
| EMC Standard         | Notes  |  |  |
| EN 55015             | Conducted emission   |  |  |
| EN 61000-3-2         | RFE Field Susceptibility test  |  |  |
| EN 61000-3-3         | Electrical Fast Transient  |  |  |
| EN 61000-4-5         | Surge Immunity Test, 2 kV; L-N                                       |  |  |
| Energy Star          | ANSI/IEEE C62.41.1-2002 and ANSI/IEEE C62.41.2-2002                  |  |  |
| FCC, 47 CFR Part 15  | Class B  |  |  |



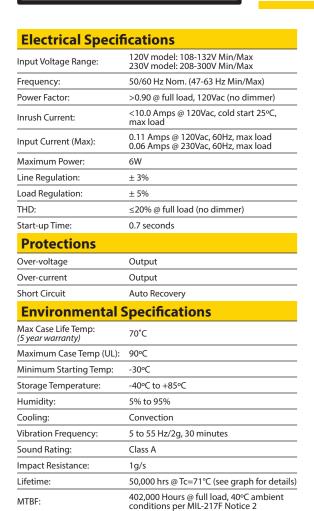

Total Power: 6 Watts

EMC:

Weight:

- 0%-100% (depends on dimmer control)
- Input Voltage: 120Vac or 230-277Vac Phase Dimming

4.5 oz. (128 g)

FCC 47CFR Part 15 Class B compliant

- UL Dry & Damp Location Rated
- UL Type HL Rated for Hazardous Locations
- IP66 & NEMA4
- Black Magic Thermal Advantage<sup>™</sup> Plastic Housing
- · Compatible with Triac (leading edge) and ELV (electronic low voltage; trailing edge) dimmer controls
- Use a dimmer that closely matches the load, just slightly larger. (EX: For best performance, use a 150W rated dimmer for 100W total LED load instead of 600W dimmer.)

LED drivers are designed and intended to operate LED loads only. Non-LED loading may be outside the specified design limits of our LED drivers, and therefore cannot be covered by any warranty. If you desire to use our LED drivers to operate non-LED loads please contact us to discuss compatibility.






## **LED06W-LT Series**


Line Voltage Dimmable





### **Dimensions**

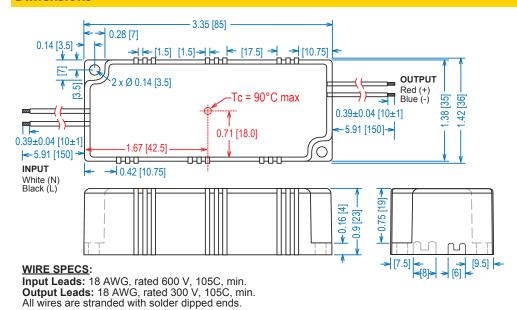



## **Power Characteristics**

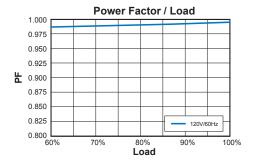

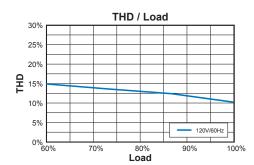



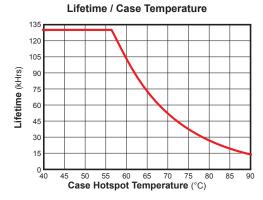

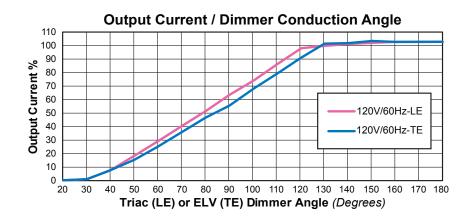

## **UL Conditions of Acceptability**

See website for additional information

**Note:** The area under the life-temperature curve represents where the driver has highly reliable operation within specification. Driver performance may drift out of published specifications as the hours of operation exceed the curve at a given temperature. Higher operating temperatures increase the chances of a failure to function. Other electrical, mechanical and environmental factors affect driver lifetime but are not represented in this calculation.

