







#### Features

- Wide input range 180 ~ 528VAC
- · Constant Voltage + Constant Current mode output
- · Metal housing with Class I design
- · Built-in active PFC function
- IP67 / IP65 rating for indoor or outdoor installations
- Function options: output adjustable via potentiometer;
   3 in 1 dimming (dim-to-off); Timer dimming
- Typical lifetime>50000 hours
- 5 years warranty



#### Applications

- · LED street lighting
- · LED high-bay lighting
- · Parking space lighting
- · LED fishing lamp
- LED greenhouse lighting
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location.


#### **■** GTIN CODE

MW Search: https://www.meanwell.com/serviceGTIN.aspx

# Description

HVG-150 series is a 150W AC/DC LED power supply featuring the dual mode constant voltage and constant current output. HVG-150 operates from  $180\sim528$ VAC and offers models with different rated voltage ranging between 12V and 54V. Thanks to the high efficiency up to 91.5%, with the fanless design, the series is able to operate from -40°C through as high as +85°C case temperature under free air convection. The design of metal housing and IP67/IP65 ingress protection level allows this series to fit both indoor and outdoor applications. HVG-150 is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.

## ■ Model Encoding

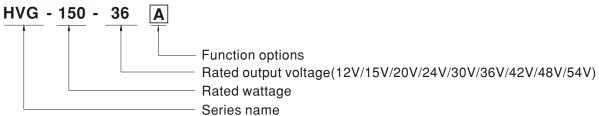

Type	IP Level	Function	Note
Α	IP65	Io and Vo adjustable through built-in potentiometer.	In Stock
В	IP67	3 in 1 dimming function (0~10Vdc, 10V PWM signal and resistance)	In Stock
AB	IP65	Io and Vo adjustable through built-in potentiometer & 3 in 1 dimming function (0~10Vdc, 10V PWM signal and resistance)	In Stock
D	IP67	Timer dimming function, contact MEAN WELL for details(safety pending).	By request

# 150W Constant Voltage + Constant Current LED Driver

#### ODEOJEJO ATION

MODEL			HVG-150-12	HVG-150-15	HVG-150-20	HVG-150-24	HVG-150-30	HVG-150-36	HVG-150-42	HVG-150-48	HVG-150-54[
	DC VOLTAGE		12V	15V	20V	24V	30V	36V	42V	48V	54V
	CONSTANT CURRENT	REGION Note.4	7.2~12V	8.25~15V	11~20V	13.2~24V	16.5~30V	19.8~36V	23.1~42V	26.4~48V	29.7~54V
	RATED CURRENT		10A	10A	7.5A	6.25A	5A	4.17A	3.58A	3.13A	2.78A
	RATED POWER		120W	150W	150W	150W	150W	150.12W	150.36W	150.24W	150.12W
	RIPPLE & NOISE (	max.) Note.2	150mVp-p	150mVp-p	150mVp-p	150mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p
		····	Adjustable for	A/AB-Type onl	ly (via the built-	in potentiome	ter)				
	VOLTAGE ADJ. RA	ANGE	10.8 ~ 13.5V	13.5 ~ 17V	17 ~ 22V	22 ~ 27V	27 ~ 33V	33 ~ 40V	38 ~ 46V	43 ~ 53V	49 ~ 58V
DUTPUT			Adjustable for	A/AB-Type onl	ly (via the built-	in potentiome	ter)		1		1
	CURRENT ADJ. R.	ANGE	6 ~ 10A	5.5 ~ 10A	4.13 ~ 7.5A	3.44 ~ 6.25A	2.75 ~ 5A	2.29 ~ 4.17A	1.97 ~ 3.58A	1.72 ~ 3.13A	1.53 ~ 2.78
	VOLTAGE TOLERA	NCE Note.3	±2.5%	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
	LINE REGULATIO	N	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION		±2.0%	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	SETUP, RISE TIME		500ms, 80ms								
	HOLD UP TIME (Ty		18ms/347VAC	-	,						
	(1)	, F-,	180 ~ 528VAC		; ~ 747VDC						
	VOLTAGE RANGE	Note.5			ARACTERIST	IC" section)					
	FREQUENCY RAN	IGF	47 ~ 63Hz		,						
	THEOLIGITICAL			1///UC DE > U 0.	7/277\/AC DE -	> 0 05/3/7\/\()	C, PF≧0.93/480	VAC @full load	4		
	POWER FACTOR	(Typ.)			CTOR (PF) CH			VAC @Iuli load	1		
			,		,		@ load ≥ 60% d	nly for 12\/ m	odoli: @ load	> 75% // 80\//\ (	')
	TOTAL HARMONIC I	DISTORTION	, , ,		RMONIC DIST	•	_	1111y 101 12 v 111	oueij, @ ioau :	≤13/0/400VAC	<b>,</b> )
INPUT	EFFICIENCY /Tym	١	87%	89%		1	91%	91%	91%	91.5%	91.5%
NFUI	EFFICIENCY (Typ.	347VAC			90.5%	91%	91%	91%	9170	91.5%	91.5%
	AC CURRENT (Typ.)		0.45A 0.35A	0.5A 0.38A							
	INRUSH CURREN	480VAC				4.F00/ L . \ -4	480VAC; Per NE	TMA 440			
	MAX. No. of PSUs	on 16A			•	. ,	r of type C) at 48				
	LEAKAGE CURRE		<0.75mA / 480	0VAC							
	OVED GUDDENT		95 ~ 108%								
	OVER CURRENT		Constant curr	ent limiting, red	covers automa	tically after fau	ult condition is re	emoved			
	SHORT CIRCUIT		Constant curr	ent limiting, red	covers automa	tically after fau	ult condition is re	emoved			
PROTECTION			14.4 ~ 16.8V	18 ~ 21V	23 ~ 27V	28 ~ 34V	34 ~ 38V	41 ~ 46V	47 ~ 53V	54 ~ 60V	59 ~ 65V
	OVER VOLTAGE		Shut down o/r	voltage with a	auto-recovery o	or re-power on	to recovery				
	OVER TEMPERAT	URE	Shut down o/	p voltage, reco	overs automat	ically after ter	nperature goes	down			
	WORKING TEMP.						for 15V model)(		"OUTPUT LOA	D vs TEMPERA	TURE" section
	MAX. CASE TEMP			,	/ model, +80°C	•	,,				
	WORKING HUMID			non-condensir		101 101 111000					
ENVIRONMENT	STORAGE TEMP.,		-40 ~ +80°C.1		.9						
	TEMP. COEFFICIE		±0.03%/°C (								
	VIBRATION	111			lo paried for 3	72min oach al	ong X, Y, Z axes				
		DDS Note 7					004, IP65 or IP				
	SAFETY STANDA		.,,,					o <i>r</i> approved			
SAFETY &	WITHSTAND VOLT				G:2KVAC O						
EMC	ISOLATION RESIS	IANCE	· · · · · · · · · · · · · · · · · · ·		00M Ohms / 50			1>000/1	h . f 40\ /l	-1) -	
	EMC EMISSION				Subpart,EAC T		≥55% load,@ l	0a0≤60% on	ly for 12V mode	ei);	
			Compliance to		2,3,4,5,6,8,11, 1	EN61547, ligh	t industry level (	surge immunit	y Line-Earth 4	KV, Line-Line 2I	KV),
	EMC IMMUNITY		L/10 11 10 01								
	EMC IMMUNITY MTBF			nin. Telcordi	ia SR-332(Bell	core); 158.6K	hrs min. MIL	HDBK-217F (	(25°C)		
	MTBF		1796.5K hrs n		ia SR-332(Bell	core) ; 158.6K	hrs min. MIL	-HDBK-217F (	(25℃)		
OTHERS			1796.5K hrs n 245*68*38.8m		,	core) ; 158.6K	hrs min. MIL	-HDBK-217F (	(25°C)		

- 4. Please refer to "DRIVING METHODS OF LED MODULE".

- 5. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.


  6. Length of set up time is measured at first cold start. Turning ON/OFF the power supply may lead to increase of the set up time.

  7. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.

  8. This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly (to point (or TMP, per DLC), is about 75°C or less.
- 9. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com.
- 10. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).
- 11. For any application note and IP water proof function installation caution, please refer our user manual before using. https://www.meanwell.com/Upload/PDF/LED\_EN.pdf
- ※ Product Liability Disclaimer: For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx


#### ■ Block Diagram

PFC fosc: 130KHz PWM fosc: 70KHz

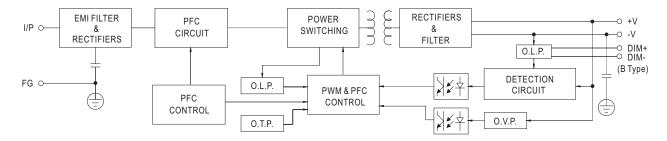

#### ■ DRIVING METHODS OF LED MODULE

X This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.

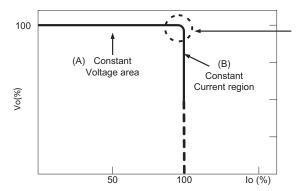


Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.




#### **■ DIMMING OPERATION**

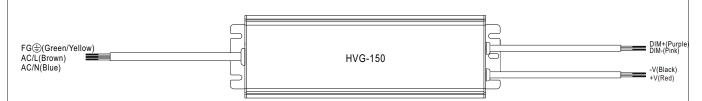


#### ※ 3 in 1 dimming function (for B/AB-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM: 0 ~ 10VDC, or 10V PWM signal or resistance.
- · Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply:  $100\mu A$  (typ.)
- O Applying additive 0 ~ 10VDC

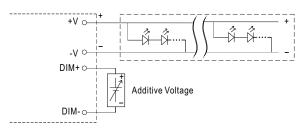


"DO NOT connect "DIM- to -V"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

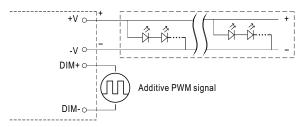



"DO NOT connect "DIM- to -V"


O Applying additive resistance:

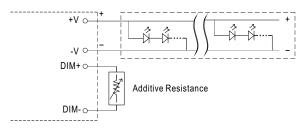

"DO NOT connect "DIM- to -V"








Note: 1. Min. dimming level is about 6% and the output current is not defined when 0% < Iout < 6%.


2. The output current could drop down to 0% when dimming input is about 0kΩ or 0Vdc, or 10V PWM signal with 0% duty cycle.




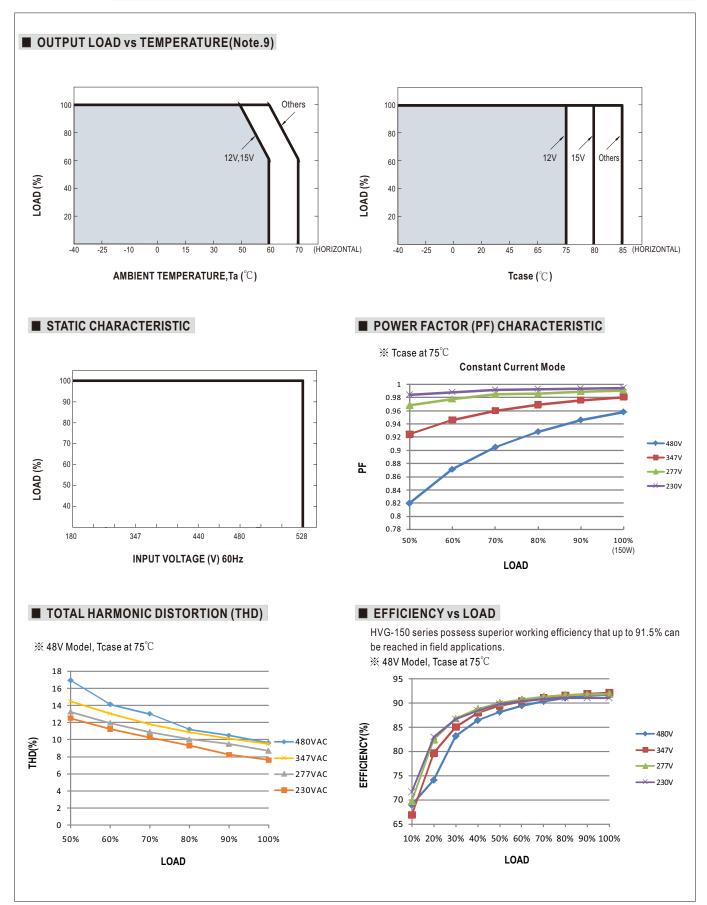





### ■ LIFE TIME

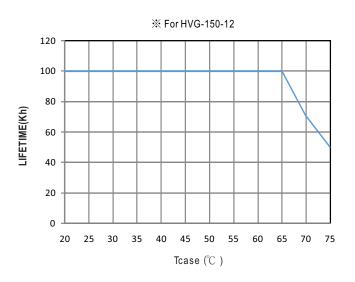

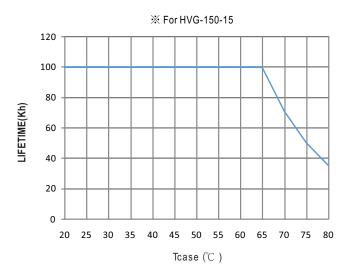


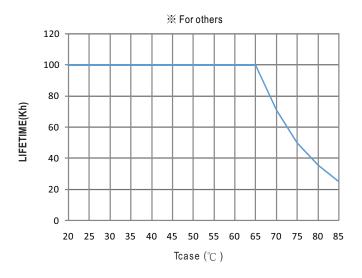

# HVG-150 series

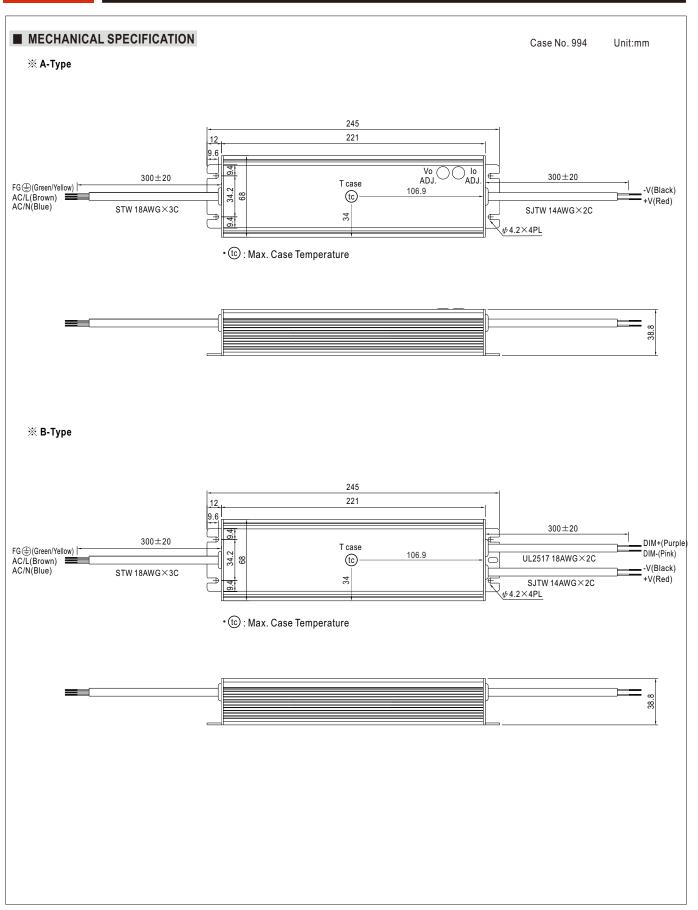



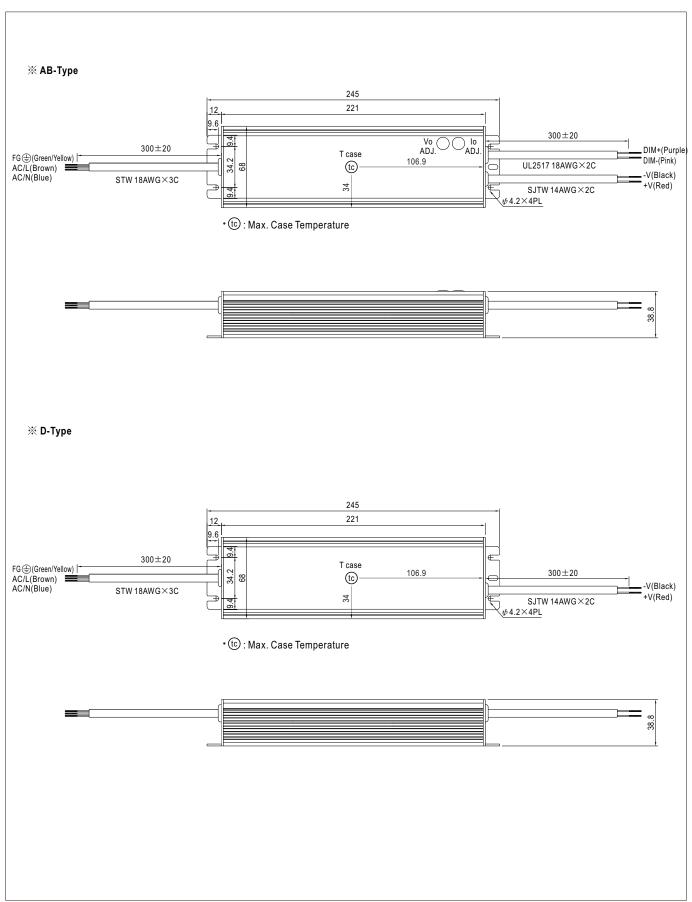


# 150W Constant Voltage + Constant Current LED Driver

#### ■ WATERPROOF CONNECTION

#### **X Waterproof connector**


Waterproof connector can be assembled on the output cable of HVG-150 to operate in dry/wet/damp or outdoor environment.

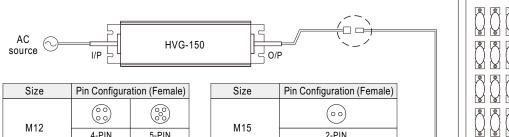

i ili ooningara	ttion (i cinaic)
000	000
4-PIN	5-PIN
5A/PIN	5A/PIN
M12-04	M12-05
10A max.	10A max.
	4-PIN 5A/PIN M12-04

Size	Pin Configuration (Female)
M15	00
	2-PIN
	12A/PIN
Order No.	M15-02
uitable Current	12A max.

#### ※ Cable Joiner

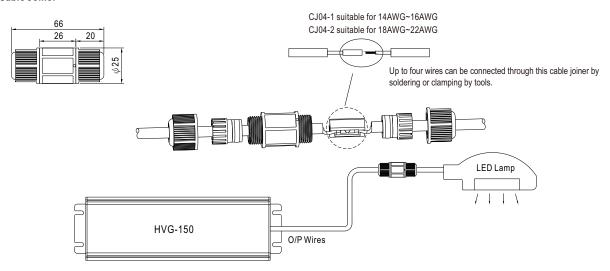

CJ04 cable joiner can be purchased independently for user's own assembly. MEAN WELL order No.: CJ04-1, CJ04-2.





#### **■ INSTALLATION MANUAL**

Please refer to : http://www.meanwell.com/manual.html