


Polyamide Accessories

Polyamide Locknuts

Hexagonal locknut, black or gray

Metric, PG, & NPT Thread

Hexagonal locknuts made of polyamide, glass fiber reinforced.

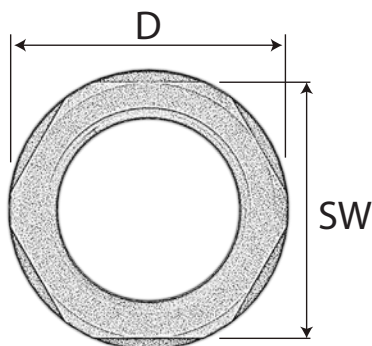

Technical data:

Material:	Polyamide 6 (30% Glass Fiber reinforced)
Color:	RAL 7001 (gray) RAL 9005 (black)
Temperature range:	
<i>permanent:</i>	-20°C to +100°C
<i>intermittent:</i>	-30°C to +150°C
Flammability:	UL 94 HB

Part Number		Thread Type	Height (H)		Diameter (D)		Wrenching Flats (SW)	
gray	black		inches	mm	inches	mm	inches	mm
LMG-12	LMB-12	M12x1.5	0.197	5	0.768	19.5	0.709	18
LMG-16	LMB-16	M16x1.5	0.197	5	0.953	24.2	0.866	22
LMG-20	LMB-20	M20x1.5	0.236	6	1.126	28.6	1.024	26
LMG-25	LMB-25	M25x1.5	0.236	6	1.378	35.0	1.260	32
LMG-32	LMB-32	M32x1.5	0.276	7	1.815	46.1	1.614	41
LMG-40	LMB-40	M40x1.5	0.276	7	2.177	55.3	1.969	50
LMG-50	LMB-50	M50x1.5	0.315	8	2.587	65.7	2.362	60
LMG-63	LMB-63	M63x1.5	0.315	8	3.248	82.5	2.953	75
LMG-75	LMB-75	M75x2.0	0.591	15	3.701	94.0	3.346	85
LPG-7	LPB-7	PG 7	0.197	5	0.823	20.9	0.748	19
LPG-9	LPB-9	PG 9	0.197	5	0.941	23.9	0.866	22
LPG-11	LPB-11	PG 11	0.197	5	1.020	25.9	0.945	24
LPG-13	LPB-13	PG 13.5	0.236	6	1.138	28.9	1.063	27
LPG-16	LPB-16	PG 16	0.236	6	1.295	32.9	1.181	30
LPG-21	LPB-21	PG 21	0.276	7	1.528	38.8	1.417	36
LPG-29	LPB-29	PG 29	0.276	7	1.961	49.8	1.811	46
LPG-36	LPB-36	PG 36	0.315	8	2.587	65.7	2.362	60
LPG-42	LPB-42	PG 42	0.315	8	2.862	72.7	2.559	65
LPG-48	LPB-48	PG 48	0.315	8	3.059	77.7	2.756	70
NPT								
LNG-3/8	LNB-3/8	NPT 3/8	0.276	7	0.984	25	0.866	22
LNG-1/2	LNB-1/2	NPT 1/2	0.276	7	1.201	30.5	1.063	27
LNG-3/4	LNB-3/4	NPT 3/4	0.276	7	1.476	37.5	1.299	33
LNG-1	LNB-1	NPT 1	0.276	7	1.819	46.2	1.614	41