
Mounting Option

07-M3-0.5 Metric Threaded Inserts

Contact Detail

558-90 Degree Bend (Code 541 Contacts)

.156 [3.96] Contact Spacing x .200 [5.08] Row Spacing



333 Series Card Edge Connector Part Number: 333-012-558-607

YOUR CONNECTION TO QUALITY & SERVICE

ACAD REFERENCE NO. 333 ENG MASTER DATE: OCT. 14/09 J.LEE NTS SHEET 1 OF 4

SECTION A-A


0.388 [9.86] Card Slot

333 Assembly

	A C.A	.D. GENE	RATED DRA	AWING	3	()	
DΤ	MAKE	MANUAL	REVISIONS	s to	MASTER.	┌^^\	
					1	' \	
					- 1	1	\mathcal{Y}
					L		

.160 [4.06] Point of Contact-

2.197[55.80]
Card Slot Accepts .054 [1.37] to .070 (1.78) Thick P.C. Board 0.370 [9.40]

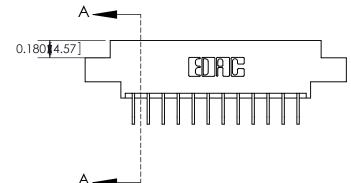

See Accompanying Page for:

- **Bend Detail**
- **Mounting Options**
- **Features and Specifications**

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.

1



333 Series Card Edge Conn	ACAD REFERENCE NO. 333 ENG MASTER			
Contact Bend Detail	DRAWN: J.LEE	DATE: OCT. 14/09		
Confact Bend Defail	CHECKED:	DATE:		
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS	SCALE: NTS	SHEET :	2 OF 4
TORONTO, ONTARIO	ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE	DRAWING NUMBER		ISSUE
YOUR CONNECTION TO QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS			1

THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER



1220F NOWRE

DRIGINAL

1



	333 Series Card Edge Connector Mounting Options			ACAD REFERENCE NO. 333 ENG MASTER			
				J.LEE	DATE: O	CT. 14/09	
	Mounting Options		CHECKED:		DATE:		
		HESE DRAWINGS AND SPECIFICATIONS	SCALE:	NTS	SHEET :	3 OF 4	
	TORONTO, ONTARIO ARE THE PROPERTY OF EDA SHALL NOT BE REPRODUCED OR USED AS THE BASIS FO		DRAWING	NUMBER		ISSUE	
	YOUR CONNECTION TO QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS	3	33 Assembly		1	

ISSUE NUMBER

ORIGINAL



Features

- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- High Profile Insulator Body .600 (15.24)
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree, & Extender Board Bends
- Single or Dual Row Configurations
- Variety of Mounting Options, Flush or Offset Lugs
- Accepts Between Contact and In-Contact Polarizing Keys

Specifications

- Insulator Material: Thermoplastic Polyester, UL 94V-0, Colour: Green
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 3 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +105 Degrees C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

333 Series Card Edge Connector	ACAD REFERENCE NO. 333 ENG MASTER
Features and Specifications	DRAWN: J.LEE DATE: OCT. 14/09
realities and specifications	CHECKED: DATE:
EDAC INC THESE DRAWINGS A	ND SPECIFICATIONS SCALE: NTS SHEET 4 OF 4
IORONIO, ONIARIO SHALL NOT BE REF	PRODUCED, OR COPIED DRAWING NUMBER ISSUE
	SALE OF APPARATUS 333 Accombly 1