THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER

ORIGINAL


(1)

MATERIALS:

- HOUSING: PBT, UL94V-0, BLACK COLOR
- INSULATOR: PBT, UL94V-0, WHITE COLOR
- WIRE-HOUSING SEAL: SILICON RUBBER

SPECIFICATIONS

- PITCH: 2.5MM
- **RATED VOLTAGE: 250V**
- RATED CURRENT: 3A MAX
- WITHSTAND VOLTAGE: AC1000V R.M.S. CONTACT RESISTANCE: 15 mOHMS MAX
- INSULATION RESISTANCE:
 - 1000 MOHMS MIN/DC 500V
- TEMPERATURE RANGE: -40°C ~ +105°C WATERPROOF GRADE: TESTED AND
 - **CERTIFIED TO IP67**

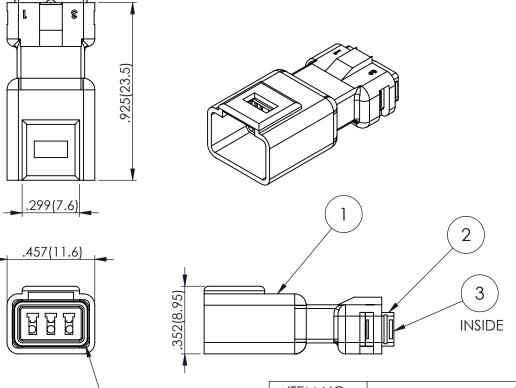

INSIDE

DESCRIPTION ITEM NO. QTY. 565-003-000-310 Housing 565-003-000-310 Rear Insulator 2 3 565-003-000-310 Rear Gasket 565-003-000-310 Front Gasket 4 ACAD REFERENCE NO.

WITHOUT WRITTEN PERMISSION.

Waterproof Connector, Insulator, Male, Black, 3Pin (22-28AWG) 565-003-000-310

EDAC INC

TORONTO, ONTARIO

CANADA

CHECKED:

DRAWN:R.STA.MONICA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS

SCALE: NOT TO SCALE SHEET 1 OF 1 DRAWING NUMBER **ISSUE** 565-003-000-310

565-003-000-310

DATE: OCT.22/10

DATE:

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2002/95/EC AND 2002/96/EC FOR RoHS COMPLIANCY

YOUR CONNECTION TO QUALITY & SERVICE