


DisplayPort Cable with Latching Connectors (M/M), 8K 60 Hz, HDR, HBR3, 4:4:4, HDCP 2.2, Black, 3 ft. (0.9 m)

MODEL NUMBER: P580-003-8K6

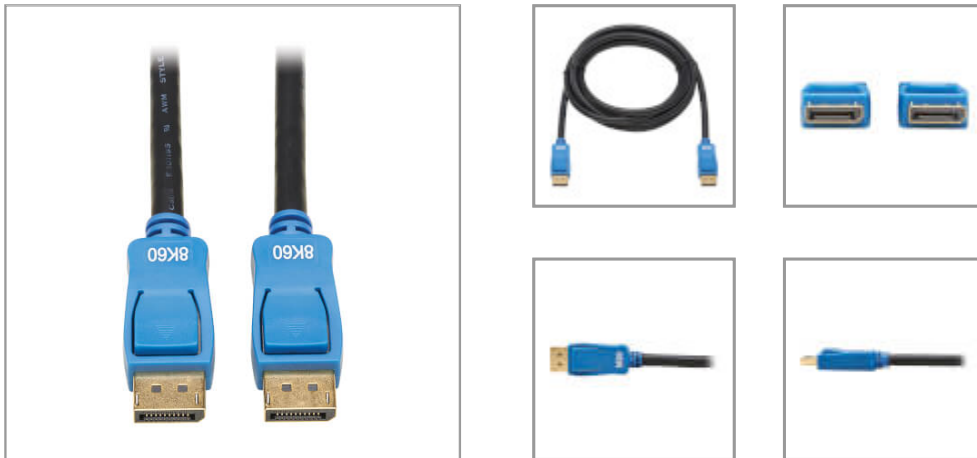

8K DisplayPort cable connects your source and display devices to transmit enhanced 8K UHD audio/video with HDR and 4:4:4 chroma.

Features

DisplayPort 1.4 Cable Gets Your Gaming, Home Theater or Digital Signage Setup 8K-Ready This high-speed DisplayPort (DP) cable (M/M) securely connects source and display devices compatible with DP 1.4 audio/video signals. Backward compatible with all your existing DisplayPort devices, including Blu-ray players, game consoles and 4K televisions, the P580-003-8K6 is ideal for future-proofing your high-definition or UHD A/V application in anticipation of an 8K upgrade. Its HBR3 data rate supports a large bandwidth, allowing for 8K @ 60 Hz resolutions.

Enjoy the Clarity of 4K/8K Video with Multi-Channel Audio and 4:4:4 Color The P580-003-8K6 supports 8K UHD resolutions up to 7680 x 4320 at 60 Hz with multi-channel sound. It's compatible with DisplayPort 1.4 standards for carrying HDR, providing a wide range of vibrant colors with richer contrast, brighter whites and deeper blacks. HDCP 2.2 compliance allows you to stream 4K Amazon and Netflix content with no complications. This BT.2020-compatible cable also supports 4:4:4 chroma subsampling for top-level PC gaming or using your HDTV as a PC monitor.

Invest in Quality Construction for Reliable Performance You're expecting this 8K cable to last a long time, which is why it has been constructed with high-quality materials, such as a rugged PVC jacket. Contacts and connectors are gold-plated to resist corrosion. Double shielding reduces line noise (EMI/RFI) that can disrupt signals traveling through the DisplayPort cord.

Specifications

| OVERVIEW | |
|------------|--------------|
| UPC Code | 037332254108 |
| Technology | DisplayPort |
| Cable Type | Passive |

Highlights

- Supports UHD resolutions up to 8K @ 60 Hz (4:4:4) for heightened video quality
- Carries High Dynamic Range (HDR) signals for rich contrast and expanded color accuracy
- Complies with HDCP 2.2 standards to display up-to-date 4K video content
- Improves maximum bandwidth to enable enhanced HBR3 applications
- Plug-and-play operation with no software required for easy, immediate installation

Applications

- Watch 8K video from a compatible Blu-ray player, game console, laptop or tablet on a compatible television, monitor or projector
- Connect a Windows laptop to a conference table's A/V box to give a video presentation on a large screen
- Play online or PC video games that display optimal graphics
- Send 8K video content to digital signs or point-of-sale displays

System Requirements

- Both source and display devices must be compatible with 8K standards to watch 8K video

Package Includes

- P580-003-8K6 DisplayPort 1.4 Cable, 8K UHD @ 60 Hz, M/M, Black, 3 ft.

| VIDEO | |
|---------------------------------|------------------------------|
| Max Supported Video Resolution | 7680 x 4320 (8K) @ 60Hz |
| Max Supported Color Depth | 24-bit True Color |
| HDR Support | Yes |
| 3D Video Supported | Yes |
| Chroma Sub Sampling | 4:4:4 |
| INPUT | |
| Bus Powered | Yes |
| PHYSICAL | |
| Color | Black |
| Material of Construction | PVC |
| Cable Jacket Color | Black |
| Connector Color | Blue |
| Cable Jacket Material | PVC |
| Cable Jacket Rating | VW-1 |
| Cable Outer Diameter (OD) | 6.8 mm |
| Wire Gauge (AWG) | 30 |
| Cable Length (ft.) | 3 |
| Cable Length (m) | 0.91 |
| Cable Length (in.) | 36 |
| Ferrite Core | No |
| Shipping Dimensions (hwd / in.) | 9.00 x 7.00 x 0.50 |
| Shipping Weight (kg) | 0.08 |
| Unit Dimensions (hwd / in.) | 9.000 x 7.000 x 0.500 |
| Unit Packaging Type | Polybag |
| ENVIRONMENTAL | |
| Operating Temperature Range | 14 to 122 F (-10 to 50 C) |
| Storage Temperature Range | 5 to 140 F (-15 to 60 C) |
| Operating Humidity Range | 0% to 90% RH, Non-Condensing |
| Storage Humidity Range | 0% to 90% RH, Non-Condensing |
| COMMUNICATIONS | |
| EDID Compatible | Yes |

| | |
|--|--------------------------------------|
| Consumer Electronics Control (CEC) Supported | Yes |
| CONNECTIONS | |
| Side A - Connector 1 | DISPLAYPORT (MALE) |
| Side B - Connector 1 | DISPLAYPORT (MALE) |
| Connector Plating | Gold |
| Contact Plating | Gold |
| Latching or Gripping Connector | Yes |
| FEATURES & SPECIFICATIONS | |
| Antimicrobial | No |
| EMI/RFI Line Noise Protection | No |
| Integrated/Removable Cable | No |
| MST Support | No |
| Antibacterial | No |
| IP68 Rated | No |
| IP20 Rated | No |
| Fully Molded Connector Ends | No |
| Ohms | No |
| Integral Strain Relief | No |
| Impedance-Matched Twisted-Pair Construction | No |
| Scaler Function | No |
| IP67 Rated | No |
| Displayport Specification | 1.4 |
| HDCP Specification | 2.2 |
| DIN Mountable | No |
| STANDARDS & COMPLIANCE | |
| Product Compliance | CE (Europe); REACH; RoHS; UKCA; WEEE |
| WARRANTY & SUPPORT | |
| Product Warranty Period (Worldwide) | Lifetime limited warranty |



1000 Eaton Boulevard
Cleveland, OH 44122
United States



© 2023 Eaton. All Rights Reserved.
Eaton is a registered trademark. All other trademarks
are the property of their respective owners.